



SPC
TECHNOLOGY






ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			VEE	05-10-10	JAG	05-10-10	XXX	20-10-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

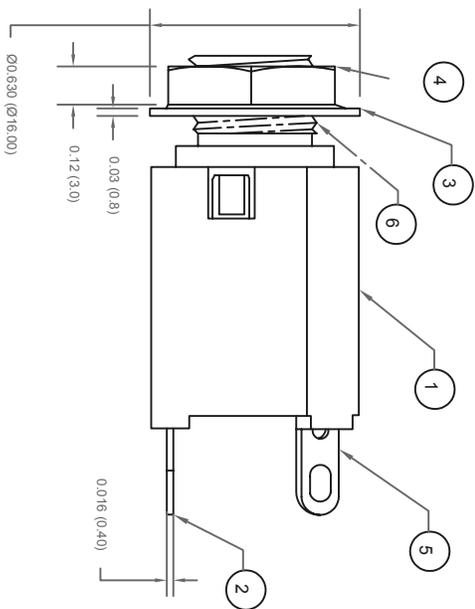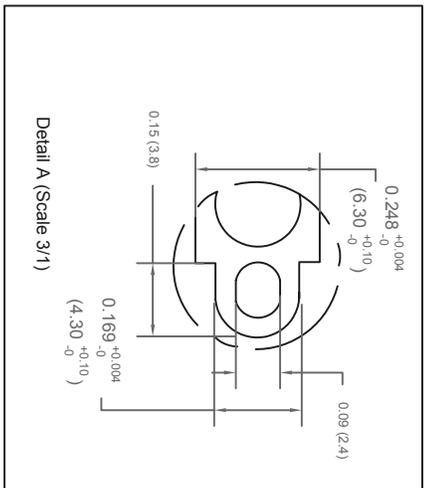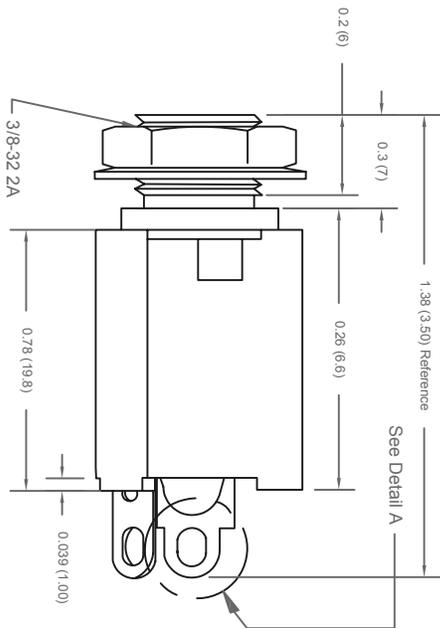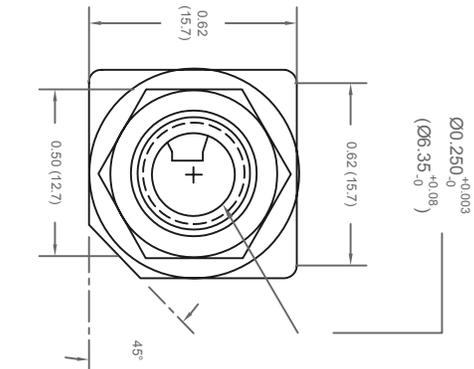

Dimensions : Inches (mm)

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	VEE	DATE:	05-10-10	DRAWING TITLE:	Enclosed Phone Jack		
CHECKED BY:	JAG	DATE:	05-10-10	SIZE	DWG. NO.	ELECTRONIC FILE	
APPROVED BY:	XXX	DATE:	20-10-10	XXX	SPC21403	11M0598	
				SCALE:	NTS	U.O.M.: INCHES [mm]	
				SHEET:	1	OF 1	

REV A



SPC
TECHNOLOGY



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			VEE	05-10-10	JAG	05-10-10	XXX	20-10-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398



Mounting Hole Scale 2/1

Specifications:

Electrical:
 Contact rating : 0.25A at 48 VDC
 Contact resistance : 20 Millions maximum initial, 50
 Insulation resistance : 50,000 megohms minimum at 500 VDC
 Dielectric strength : 500 VAC for one minute

Mechanical:
 Insertion force : 0.5 to 3.0 Kg
 Withdrawal force : 0.5 to 3.0 Kg
 Operating life : 10,000 cycles

Environmental:
 Operating temperature : -40°C to 80°C

Item	Description	Material/Finish
1	Housing	ABS, UL94V-0
2	Tip Spring	Bronze - Tin Plated
3	Washer	Brass - Nickel Plated
4	Hex Nut	Brass - Nickel Plated
5	Sleeve Terminal	Brass - Tin Plated
6	Bushing	ABS, UL94V-0

Note : 'X' in Part Number Denotes Schematic: See Table Above

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

VEE

DATE:

05-10-10

DRAWING TITLE:

Enclosed Phone Jack

CHECKED BY:

JAG

DATE:

05-10-10

SIZE DWG. NO.

XXX

SPC21403

ELECTRONIC FILE

11M0598

REV

A

APPROVED BY:

XXX

DATE:

20-10-10

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET:

1 OF 1

