


FEATURES	10W AC/DC Medical Open Frame	SP-M10 series
Universal AC input / Full range	Withstand 2G vibration test	
Cooling by free air convection	Green design, No-load power consumption < 0.3W	
Brown-out (Low AC Input voltage)	100% full load burn-in test	
Medical safety approved	Protections: Short circuit / Over load / Over voltage	
Isolation class II	3 Year Warranty	
All using 105°C long life electrolytic capacitors	High operation temperature up to 70 C	



SPECIFICATION


Model	SP-M10-05	SP-M10-12	SP-M10-15	SP-M10-24	
Output Requirements	Voltage (1)	5V	12V	15V	
	Rated Current	2A	0.83A	0.66A	
	Current Range	0~2A	0 ~ 0.83A	0 ~ 0.66A	
	Rated Power	10W	9.96W	9.9W	
	Ripple & Noise (Max) (2)	80 mV	150 mV	150 mV	
	Voltage Adjustment Range		±10%		
	Voltage Tolerance (3)	± 2%	± 1%	± 1%	
	Line Regulation	±0.5%	±0.5%	±0.5%	
	Load Regulation	± 1%	±0.5%	±0.5%	
	Setup, Rise Time	100ms, 25ms/230VAC 100ms, 25ms/115VAC at full load			
Input Requirements	Hold Time	100ms / 230VAC 25ms / 115VAC at full load			
	Voltage (4)	85V ~ 264VAC 125 ~ 373VDC			
	Frequency	47Hz ~ 63Hz			
	Efficiency (Typ.)	77%	79%	80%	82%
	AC Current (max.)	0.25 A / 115VAC 0.15A / 230VAC			
Protection	Inrush Current (Typ.)	Cold Start 25A / 115VAC 45A / 230VAC			
	Over Load	Above 110% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed			
	Over Voltage	115% ~ 145% rated output voltage Protection type : latch-off mode			
Environmental Conditions	Operating Temperature	-20°C ~ +70°C (Refer to output load de-rating curve)			
	Operating Humidity	20 ~ 90% RH non-condensing			
	Storage Temperature, Humidity	- 40 +85°C / 10 ~ 95% R.H			
	Temperature Coefficient	±0.03%/°C (0 ~ 50°C)			
	Vibration	10 ~ 500HZ, 2G 10min./ 1 cycle, period for 60 min. Each along X,Y,Z axes			




Model	SP-M10-05	SP-M10-12	SP-M10-15	SP-M10-24
Safety & EMC (5)	Safety Standards	UL60601-1 / TUVEN60601-1 / IEC60601-1 Approved		
	Green Energy	ENERGY STAR® Compliant Single Voltage External AC – DC and AC – AC Power Supplies Eligibility Criteria (Version 1.1)		
	Withstand Voltage	I/P -O/P: 4KVAC		
	Isolation Resistance	I/P -O/P : 100M Ohms / 500VDC		
	EMI Conduction & Radiation	EN55011: 2007+A2: 2007 Class B		
	Harmonic Current	EN61000-3-2: 2006 Class A, EN61000-3-3: 1995+A1: 2001+A2: 2005		
Others	EMS Immunity	EN60601-1-2: 2001+A1: 2006, IEC61000-4-2,3,4,5,6,8,11 light industry level, criteria A		
	MTBF	210.2K HRS Compliance: MIL-HDBK-217F		
	Dimension (W*H*D)	65 x 45 x 22(mm) or 2.56 x 1.77 x 0.87(inches)		
	Packing	0.045kg ; 120Pcs/5.4kg		

NOTES:


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25C ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47 uf parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Line regulation is measured from low line to high line at rated load.
5. Load regulation is measured from 0% to 100% rated load.
6. The power supply is considered a component which will be installed into a final system. The final system must be re-tested to meet EMC directives.
7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the setup time.



■ Mechanical Specification

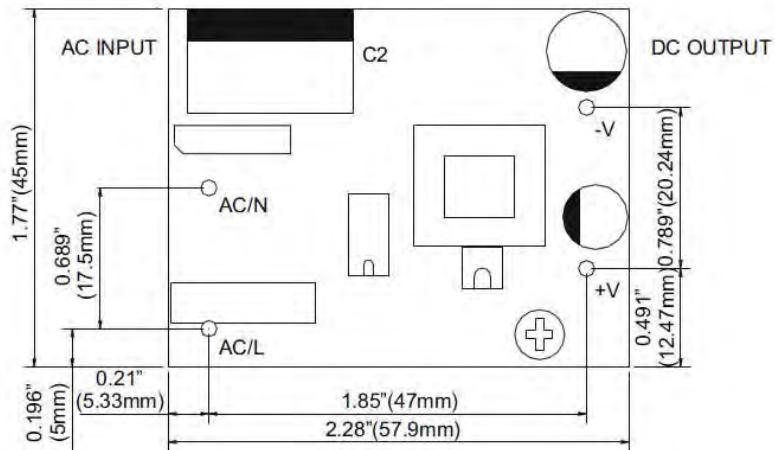

■ Block Diagram

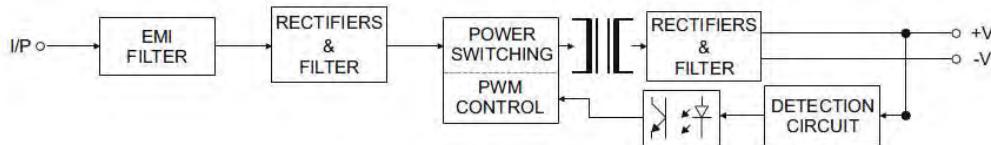

■ De-rating Curve

