


NOTES:




1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, (for thin panels less than .188 [4.75mm] thick, slide SPC 125 spacer on back of lens), and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.

REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	4-23-10	SMU

RETAINERS
(ORDER SEPARATELY)




SPC 125

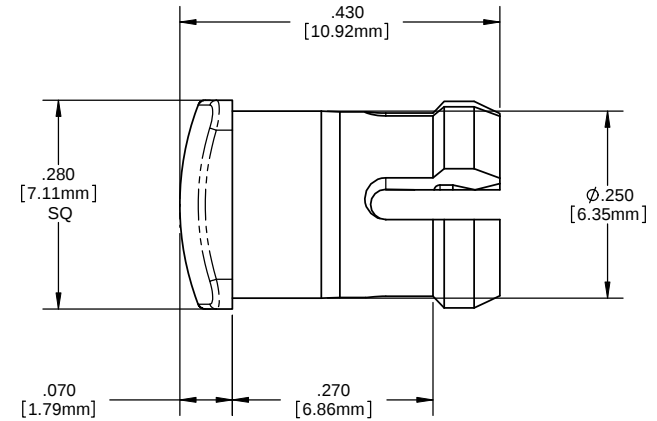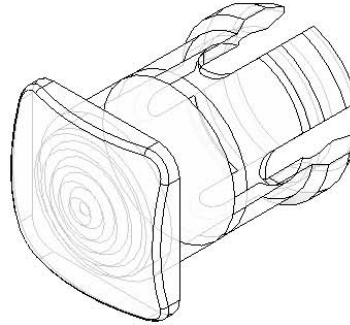

ORDERING CODE : **SQB 400 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
ANGLES ±1°	DECIMALS .X ±.020 .XX ±.010 .XXX ±.005	FINISH SEE NOTES		TITLE: 5MM SQUARE LOW PROFILE FRESNEL LENS	
BREAK ALL CORNERS AND JAWES RADIUS .005 MAX		APPROVAL		SIZE	DWG. NO.
		DATE		B	4-23-10
THIRD ANGLE PROJECTION		DRAWN: SMU	4-23-10	REV	
DO NOT SCALE DRAWING		CHECKED: DZ	4-23-10	001	
PROPRIETARY AND CONFIDENTIAL THIS DRAWING IS THE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC.		DO NOT SCALE DRAWING		SCALE: 1:1	
				SHEET 1 OF 1	