

# DATA SHEET

## SURGE CHIP RESISTORS

AUTOMOTIVE GRADE

SR series

1%, 0.5%

sizes 0402/0603/0805/1206/1210/1218/2010/2512

RoHS compliant & Halogen free






**MARKING**

**SR0402**




No Marking

**SR1218**

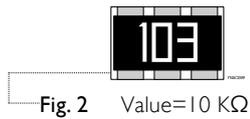

E-24 series: 3 digits  
First two digits for significant figure and 3rd digit for number of zeros

**SR0603 / SR0805 / SR1206 / SR1210 / SR2010 / SR2512**

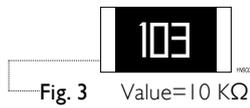

E-24 series: 3 digits  
First two digits for significant figure and 3rd digit for number of zeros



**NOTE**

For further marking information, please refer to data sheet “Chip resistors marking”.

**CONSTRUCTION**

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added at each end and connected by a resistive glaze. The resistive glaze is covered by a lead-free glass. The composition of the glaze is adjusted to give the approximately required resistance value. The whole element is covered by a protective overcoat. The top of overcoat is marked with the resistance value. Finally, the two external terminations (Ni/matte tin) are added, as shown in Fig.4.


**OUTLINES**

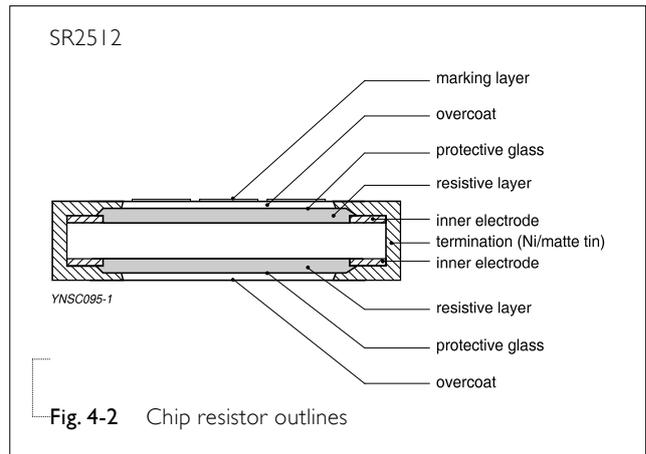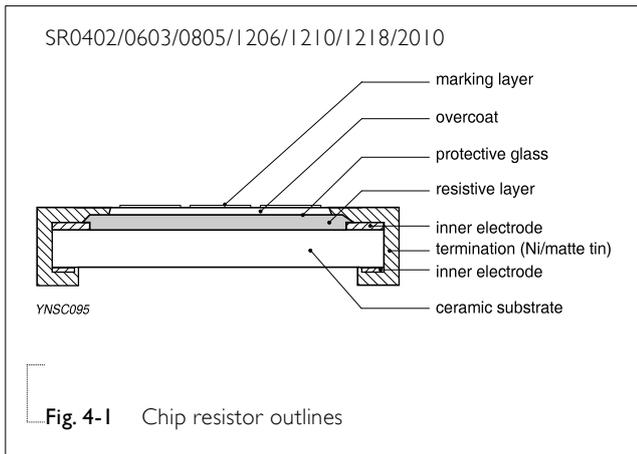

**DIMENSIONS**

Table I

TYPE	L (mm)	W (mm)	H (mm)	l <sub>1</sub> (mm)	l <sub>2</sub> (mm)
SR0402	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
SR0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.15	0.25±0.15
SR0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.35±0.20
SR1206	3.10±0.10	1.60±0.10	0.55±0.10	0.45±0.20	0.40±0.20
SR1210	3.10±0.10	2.60±0.15	0.55±0.10	0.45±0.15	0.50±0.20
SR1218	3.10±0.10	4.60±0.10	0.55±0.10	0.45±0.20	0.40±0.20
SR2010	5.00±0.10	2.50±0.15	0.55±0.10	0.55±0.15	0.50±0.20
SR2512	6.35±0.10	3.10±0.15	0.55±0.10	0.60±0.20	0.50±0.20

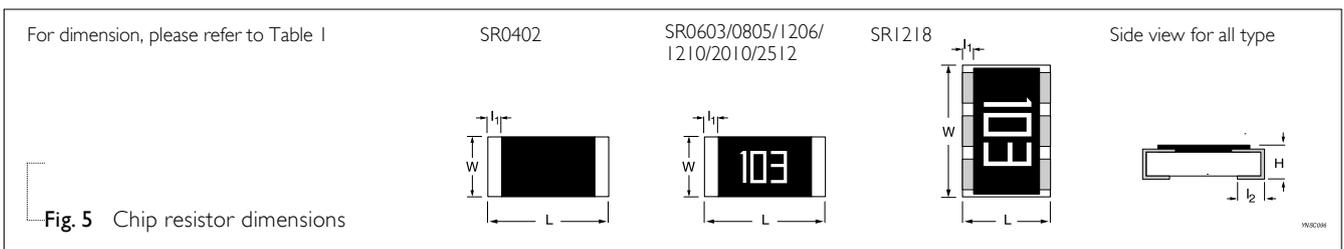

**ELECTRICAL CHARACTERISTICS**

Table 2

TYPE	POWER	RESISTANCE RANGE	CHARACTERISTICS				
			Operating Temperature Range	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Temperature Coefficient of Resistance
SR0402	1/16W	E24/E96 0.5%, 1% 1 Ω ≤ R ≤ 100 KΩ	-55 °C to +155 °C	50 V	100 V	100 V	±200 ppm/°C
	1/8W						
	1/5W						
SR0603	1/10W			75V	150V	150V	
	1/5W						
	1/4W						
SR0805	1/8 W			150V	300V	300V	
	1/4W						
	1/3W						
SR1206	1/2W			200 V	400 V	500 V	
	3/4W						
	1 W						
SR1210	1/2W			200 V	400 V	500 V	
SR1218	1 W			200 V	400 V	500 V	
SR2010	3/4 W			200 V	400 V	500 V	
SR2512	1 W	200 V	400 V	500 V			
	2W						

**FOOTPRINT AND SOLDERING PROFILES**

Recommended footprint and soldering profiles, please refer to data sheet “Chip resistors mounting”.

**PACKING STYLE AND PACKAGING QUANTITY**

Table 3 Packing style and packaging quantity

PACKING STYLE	REEL DIMENSION	SR0402	SR0603/0805/1206	SR1210	SR1218/2010/2512
Paper taping reel (R)	7" (178 mm)	10,000	5,000	5,000	---
	13" (330 mm)	50,000	20,000	20,000	---
Embossed taping reel (K)	7" (178 mm)	---	---	---	4,000

**NOTE**

I. For paper/embossed tape and reel specification/dimensions, please refer to data sheet “Chip resistors packing”.

**FUNCTIONAL DESCRIPTION**

**OPERATING TEMPERATURE RANGE**

Range: -55 °C to +155 °C

**POWER RATING**

Each type rated power at 70 °C:

- SR0402: 07 = 1/16W; 7W = 1/8W; 7T=1/5W
- SR0603: 07 = 1/10W; 7W = 1/5W; 7T=1/4W
- SR0805: 07 = 1/8W; 7W = 1/4W; 7T=1/3W; 47=1/2W
- SR1206: 07 = 1/4W; 7W = 1/2W; 7T=3/4W
- SR1210: 07 = 1/2W
- SR1218: 07 = 1W
- SR2010: 07 = 3/4W
- SR2512: 07 = 1W; 7W=2W

**RATED VOLTAGE**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$



Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value (Ω)

**PULSE LOAD BEHAVIOR**

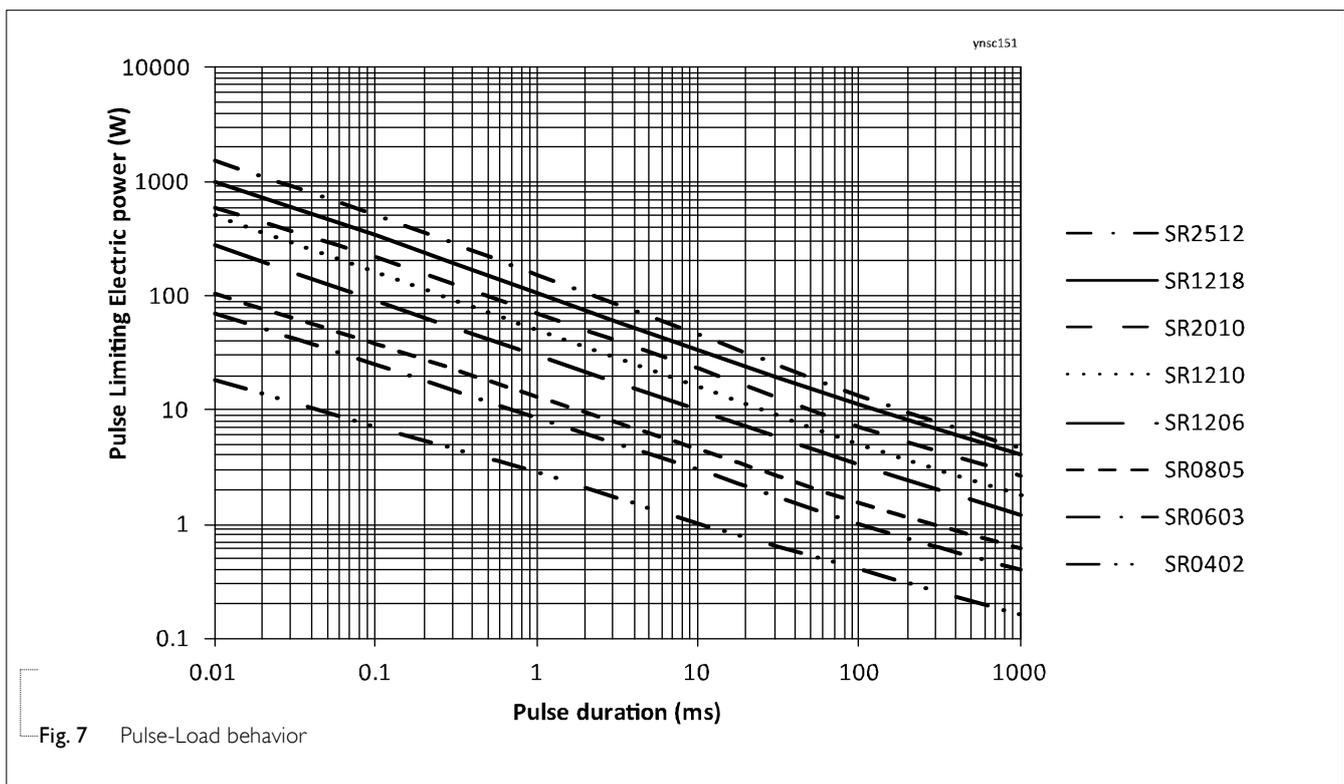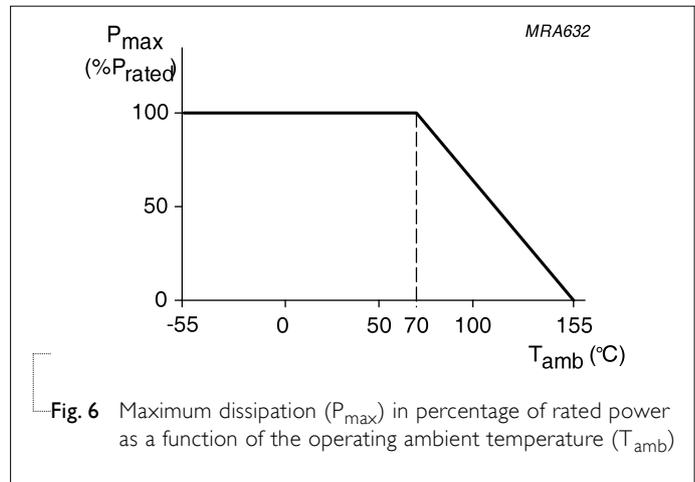

**TESTS AND REQUIREMENTS**

Table 4 Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Temperature Coefficient of Resistance (T.C.R.)	MIL-STD-202 Method 304	At +25/-55 °C and +25/+125 °C  <b>Formula:</b> $T.C.R = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ Where t <sub>1</sub> = +25 °C or specified room temperature t <sub>2</sub> = -55 °C or +125 °C test temperature R <sub>1</sub> = resistance at reference temperature in ohms R <sub>2</sub> = resistance at test temperature in ohms	Refer to table 2
Short Time Overload	IEC60115-1 4.13	2.5 times of rated voltage or maximum overload voltage whichever is less for 5 sec at room temperature	±(2.0%+0.05 Ω)
High Temperature Exposure	IEC 60068-2-2	1,000 hours at T <sub>A</sub> = 155 °C ±5 °C, unpowered	±(2.0%+0.05 Ω)
Humidity	IEC 60115-1 4.24.2	Steady state for 1,000 hours at 40 °C / 95% R.H. RCWV applied for 1.5 hours on and 0.5 hour off	±(3.0%+0.05 Ω)
Life	IEC 60115-1 4.25.1 MIL-STD-202 Method 108	1,000 hours at 70±2 °C, RCWV applied for 1.5 hours on, 0.5 hour off, still-air required	±(2.0%+0.05 Ω)
Resistance to Soldering Heat	IEC 60115-1 4.18 MIL-STD- 202 Method 210	Condition B, no pre-heat of samples Lead-free solder, 260±5 °C, 10±1 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	±(1.0%+0.05 Ω) No visible damage
Temperature Cycling	JESD22-A104C	-55/+125 °C for 1 cycle per hour, with 1,000 cycles. Devices mounted	±(1.0%+0.05 Ω)

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability - Wetting	J-STD-002	Electrical Test not required Magnification 50X SMD conditions: Immerse the specimen into the solder pot at 245±3°C for 2±0.5 seconds.	Well tinned (≥95% covered) No visible damage
Board Flex	IEC 60115-1 4.33	Chips mounted on a 90mm glass epoxy resin PCB (FR4) <b>Bending for 0402: 5mm</b> <b>0603 &amp; 0805: 3mm</b> <b>1206 and above: 2mm</b> Holding time: minimum 60 seconds	±(1.0%+0.05 Ω)

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 2	Oct. 02, 2017	-	- Add SR0402 7T (triple power), SR0805 47 (quadruple power), SR2512 7W (double power)
Version 1	Nov. 11, 2016	-	- Update 7T power for 1206
Version 0	Dec. 01, 2015	-	- New product datasheet

*“ Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products are unchanged. Any product change will be announced by PCN.”*

*"The reimbursement is limited to the value of the products."*