

## SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - **30 to 150Volts**  
FORWARD CURRENT - **10.0 Amperes**


### FEATURES

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

### MECHANICAL DATA

- Case: TO-220AB molded plastic
- Polarity: As marked on the body
- Weight: 0.08ounces,2.24 grams
- Mounting position :Any

### TO-220AB

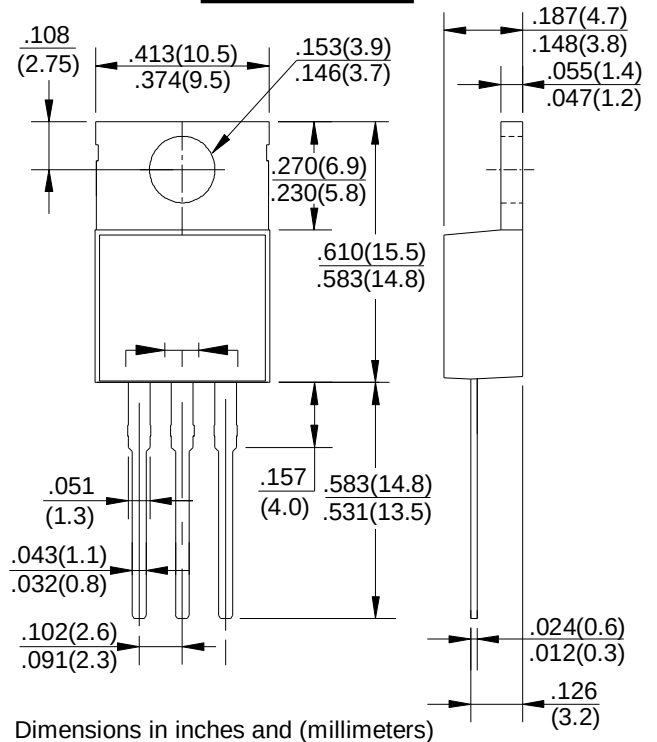

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| CHARACTERISTICS                                                                                          | SYMBOL            | SR 1030CT   | SR 1040CT | SR 1050CT | SR 1060CT | SR 1080CT | SR 10100CT | SR 10150CT | UNIT |
|----------------------------------------------------------------------------------------------------------|-------------------|-------------|-----------|-----------|-----------|-----------|------------|------------|------|
| Maximum Recurrent Peak Reverse Voltage                                                                   | V <sub>RRM</sub>  | 30          | 40        | 50        | 60        | 80        | 100        | 150        | V    |
| Maximum RMS Voltage                                                                                      | V <sub>RMS</sub>  | 21          | 28        | 35        | 42        | 56        | 70         | 105        | V    |
| Maximum DC Blocking Voltage                                                                              | V <sub>DC</sub>   | 30          | 40        | 50        | 60        | 80        | 100        | 150        | V    |
| Maximum Average Forward Rectified Current ( See Fig.1) @T <sub>c</sub> =95 °C                            | I <sub>(AV)</sub> | 10          |           |           |           |           |            |            | A    |
| Peak Forward Surage Current<br>8.3ms Single Half Sine-Wave<br>Super Imposed on Rated Load (JEDEC Method) | I <sub>FSM</sub>  | 125         |           |           |           |           |            |            | A    |
| Peak Forward Voltage at 5.0A DC (Note1)                                                                  | V <sub>F</sub>    | 0.55        | 0.60      | 0.70      |           | 0.85      | 0.85       | 0.95       | V    |
| Maximum DC Reverse Current @T <sub>J</sub> =25°C<br>at Rated DC Bolcking Voltage @T <sub>J</sub> =100°C  | I <sub>R</sub>    | 1.0<br>50   |           |           |           |           |            |            | mA   |
| Typical Junction Capacitance (Note2)                                                                     | C <sub>J</sub>    | 250         |           |           |           |           |            |            | pF   |
| Typical Thermal Resistance (Note3)                                                                       | R <sub>θJC</sub>  | 3.0         |           |           |           |           |            |            | °C/W |
| Operating Temperature Range                                                                              | T <sub>J</sub>    | -55 to +150 |           |           |           |           |            |            | °C   |
| Storage Temperature Range                                                                                | T <sub>STG</sub>  | -55 to +150 |           |           |           |           |            |            | °C   |

NOTES:1.300us pulse width,2% dudy cycle.

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

3.Thermal resistance junction to case.



FIG. 1 – FORWARD CURRENT DERATING CURVE

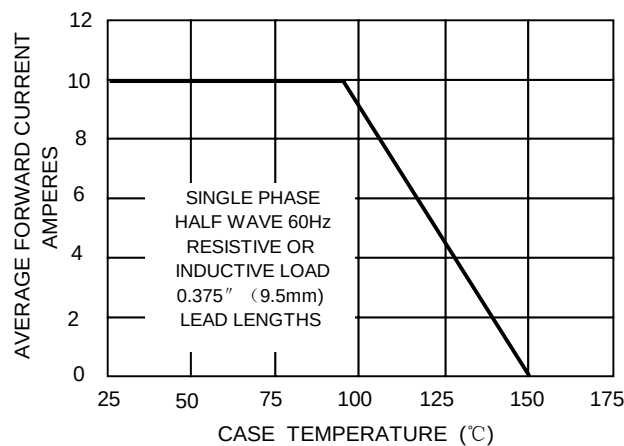


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

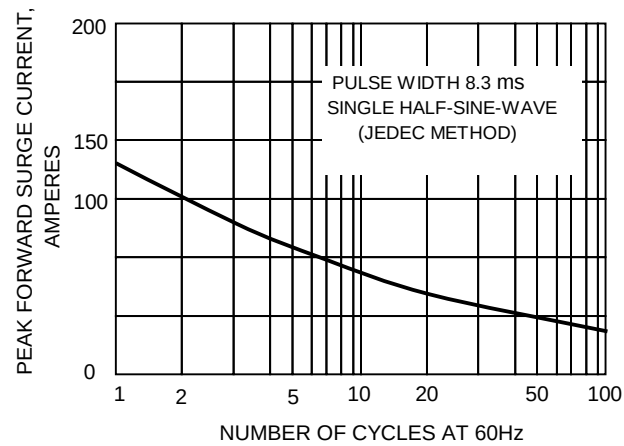


FIG.3-TYPICAL REVER CHARACTERISTICS

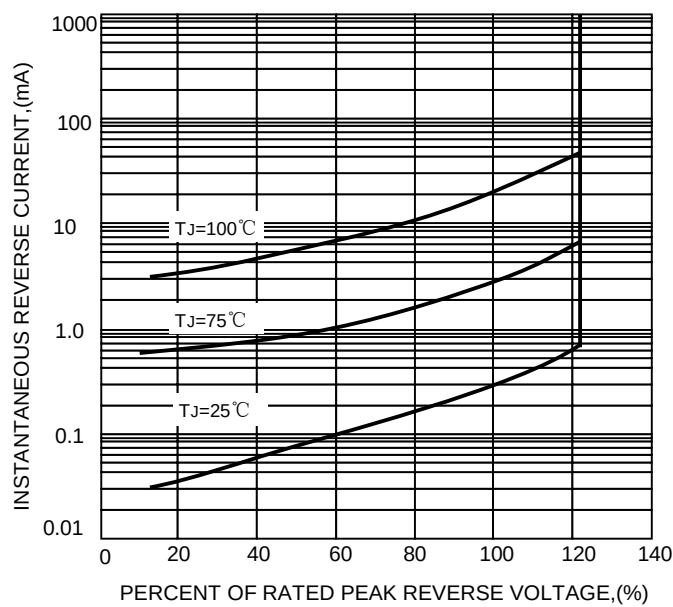


FIG.4-TYPICAL FORWARD CHARACTERISTICS

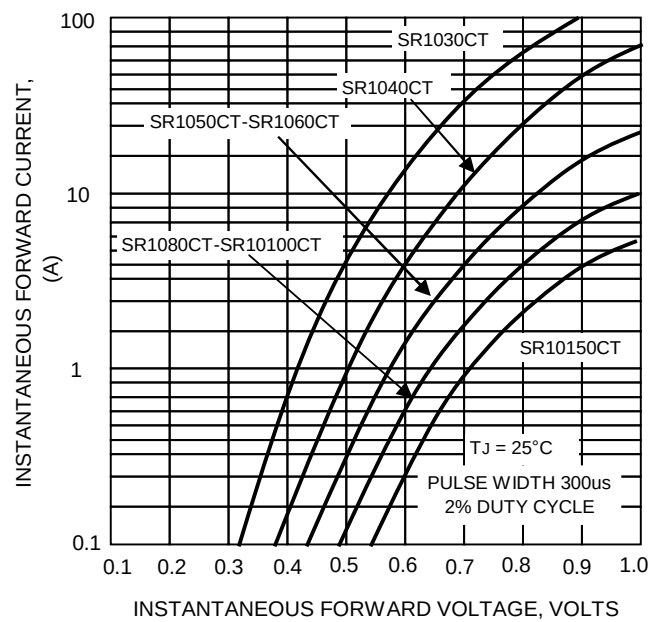


FIG.3 – TYPICAL JUNCTION CAPACITANCE

