



SCHOTTKY BARRIER RECTIFIER

SR2020 THRU SR20100

VOLTAGE RANGE

20 to 100 Volts

CURRENT


20.0 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency
- Low forward voltage, high current capability
- High surge capacity
- For use in low voltage high frequency inverters, Free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: TO-220AC molded plastic
- Terminals: Lead solderable per MIL-STD-202 Method 208
- Polarity: as marked
- Mounting position: Any
- Weight: 0.08ounce, 2.24 grams

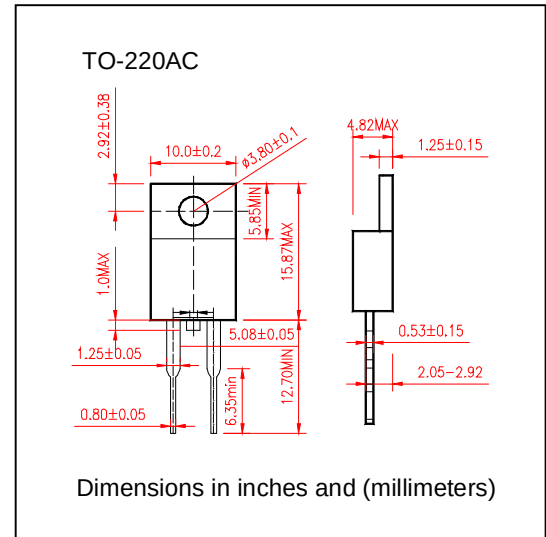

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SR 2020	SR 2030	SR 2035	SR 2040	SR 2045	SR 2050	SR 2060	SR 2080	SR 20100	SR 20150	SR 20200	UNIT	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	35	40	45	50	60	80	100	150	200	Volts	
Maximum RMS Voltage	V _{RMS}	14	21	25	28	32	35	42	56	70	105	140	Volts	
Maximum DC Blocking Voltage	V _{DC}	20	30	35	40	45	50	60	80	100	150	200	Volts	
Maximum Average Forward Rectified Current At Tc=100℃	I _(AV)	20.0											Amps	
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	150											Amps	
Maximum Forward Voltage at 20.0A per element	V _F	0.65					0.75		0.85				Volts	
Maximum DC Reverse Current at rated DC Blocking Voltage per element	T _C = 25℃	I _R	1.0											mA
	T _C = 100℃		100											
Typical Junction Capacitance(Note2)	C _J	700											pF	
Typical Thermal Resistance (Note 1)	R _{θJC}	2.0											℃/W	
Operating Storage Temperature Range	T _J T _{STG}	(-55 to +150)											℃	

Notes:

- Thermal Resistance Junction to CASE
- Measured at $V_R=4\text{V}$ and $f=1\text{MHz}$



SCHOTTKY BARRIER RECTIFIER

SR2020 THRU SR20100

VOLTAGE RANGE 20 to 100 Volts
CURRENT 20.0 Amperes

RATING AND CHARACTERISTIC CURVES SR12020 THRU SR20100

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

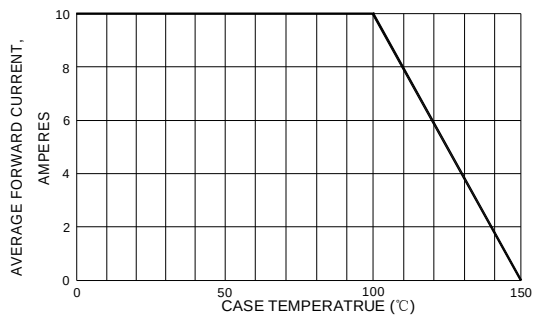


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTIC

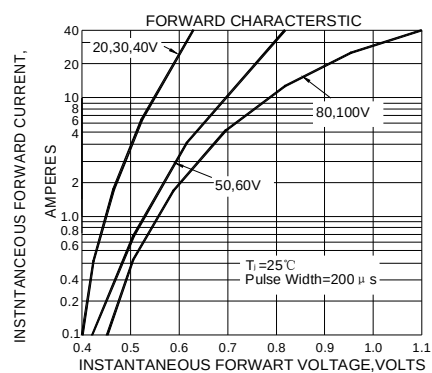


FIG.2-TYPICAL REVERSE
CHARACTERISTICS

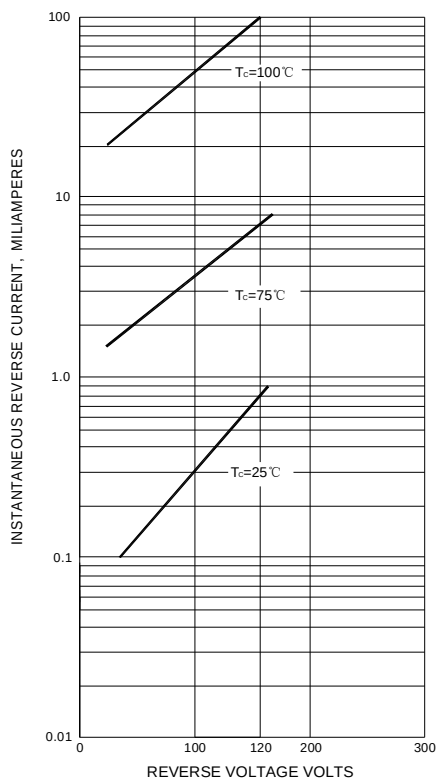


FIG.4-MAXIMUM NON-REPETITIVE
SURGE CURRENT

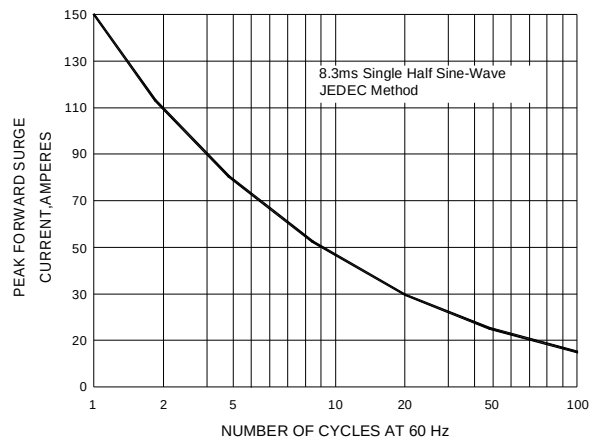


FIG.5-TYPICAL JUNCTION
CAPACITANCE

