



SCHOTTTKY BARRIER RECTIFIER

SR220 THRU SR2100

VOLTAGE RANGE

20 to 100 Volts

CURRENT

2.0 Ampere


FEATURES

- Fast switching
- Low forward voltage
- Low power loss for high efficiency
- High surge capability
- High temperature soldering guaranteed
250°C/10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: solderable per MIL-STD-202E Method 208C
- Polarity :Color band denoted cathode end
- Mounting position: Any
- Weight: 0.014ounce, 0.39 gram

DO-204AC(DO-15)

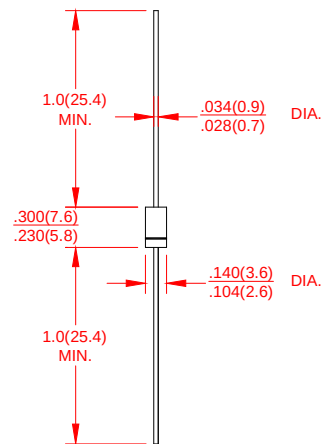

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	SR220	SR230	SR240	SR250	SR260	SR280	SR2100	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage		V _{RMS}	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage		V _{DC}	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length ,(NOTE 1) T _L =100℃		I _(AV)	2.0							Amps
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	60							Amps
Maximum Instantaneous Forward Voltage @2.0A		V _F	0.55		0.70		0.85			Volts
Maximum DC Reverse Current at rated DC blocking voltage per element(Note1)	T _A = 25℃	I _R	0.5							μA
	T _A = 100℃		10							
Typical Junction Capacitance (NOTE 3)		C _J	200							pF
Typical Thermal Resistance (NOTE 2)		R _{θJA}	20							℃/W
Operating Junction Temperature Range		T _J	(-55 to +150)							℃
Storage Temperature Range		T _{STG}	(-55 to +150)							℃

Notes:

1. Pulse test: 300 μs pulse width, 1% duty cycle
2. Thermal Resistance from junction to ambient P.C.B. mounted with 0.375" (9.5mm) lead length with 1.5" $\times$ 1.5" (38 $\times$ 38mm) copper pads
3. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.



SCHOTTKY BARRIER RECTIFIER

SR220 THRU SR2100

VOLTAGE RANGE 20 to 100 Volts
CURRENT 2.0 Ampere

RATING AND CHARACTERISTIC CURVES SR202 THRU SR210

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

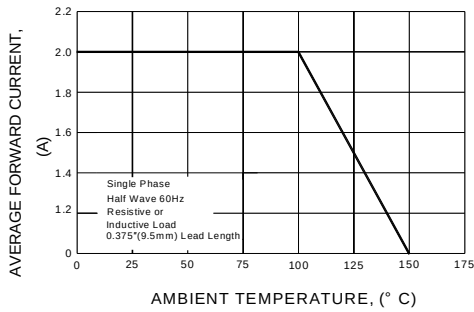


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

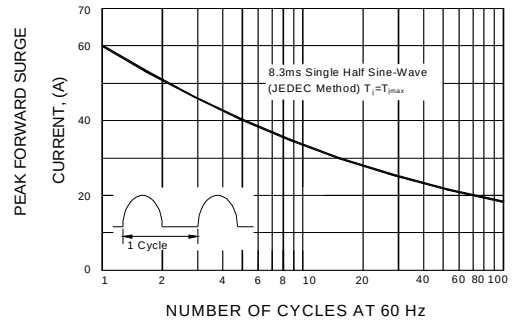


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

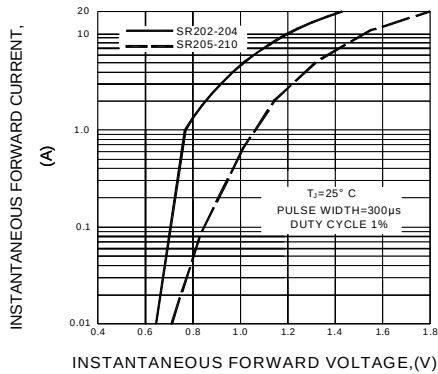


FIG.4-TYPICAL REVERSE CHARACTERISTICS

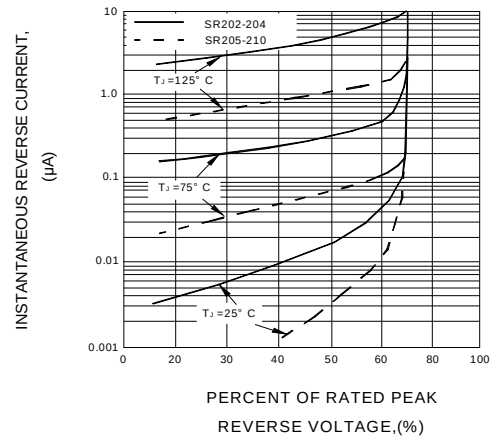


FIG.5-TYPICAL JUNCTION CAPACITANCE

