


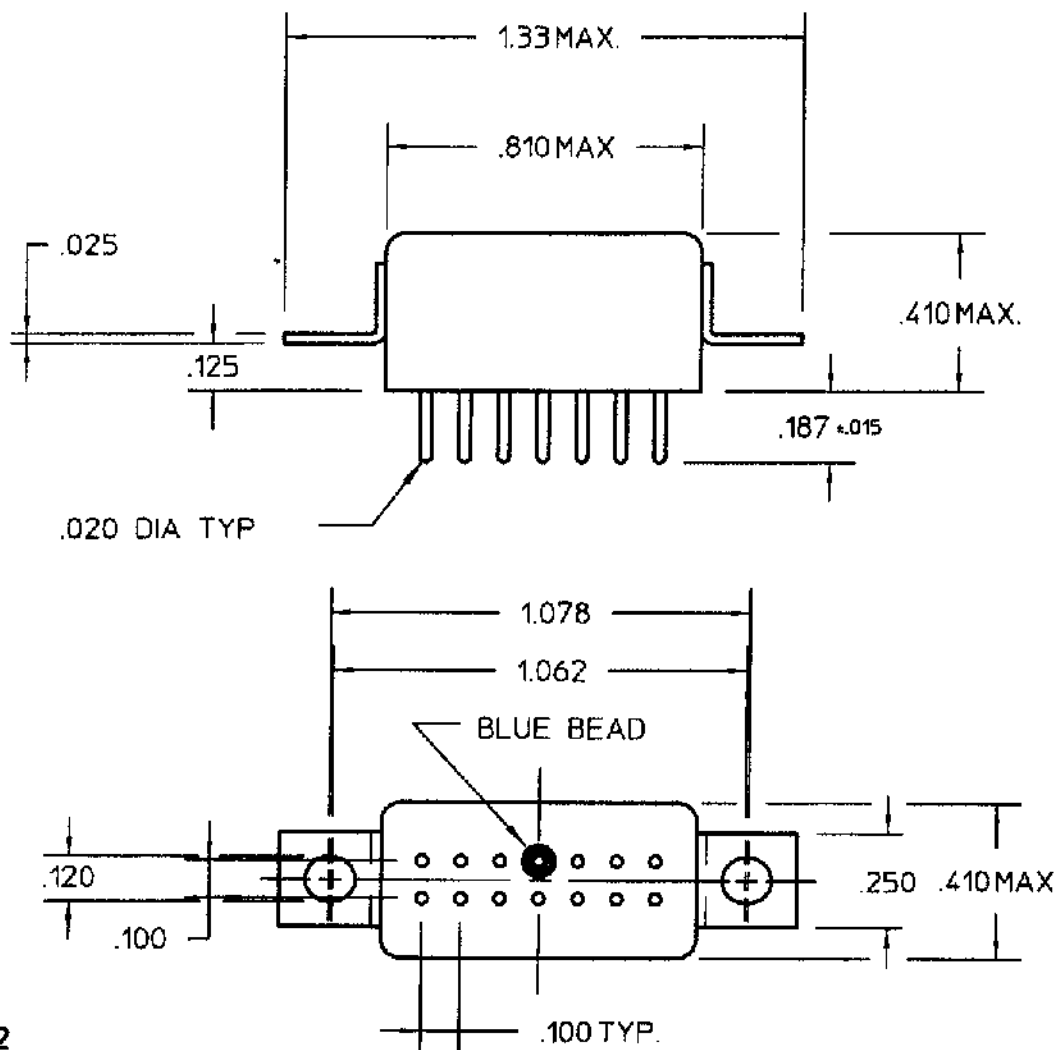

REV. 2

DCO 63333

COIL: @ 25°C
 RESISTANCE _____ 390 OHMS ±10%
 NOMINAL VOLTAGE _____ 26.5 VDC
 MUST OPERATE _____ 14.0 VDC @ 25°C


 MUST RELEASE _____ 1.4 VDC @ 25°C

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 15 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 5 MS MAX.
 _____ BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO
 _____ 2 AMP 28 VDC RESISTIVE

DR. R.B. 9/27/93 CK. TLG 10-24-00

CII Technologies™
 advanced control electronic solutions

CUST. _____ CII STD

CUST. NO. _____ REV. _____

"SR" RELAY

SRBW-4C-24B