



Features

- Current rating up to 1.4 A
- Inductance range: 120 to 5000 μ H
- Frequency range to 200 MHz
- RoHS compliant*

Applications

- EMI suppression


SRF1006 Series - Line Filter

Electrical Specifications @ 25 °C


Part Number	L (μ H) *	Leakage Ind. (μ H) Max.	DCR (Ω) max. (each winding)	Rated Voltage (Vdc)	Rated Current (A)	Impedance (Z)	
						Freq. Range (MHz)	Min. Value (Ω)
SRF1006-121Y	120 $\pm$ 40 %	1.45	0.025	50	1.40	10 - 200	200
SRF1006-251Y	250 $\pm$ 40 %	3.2	0.035	50	1.19	5 - 100	400
SRF1006-501Y	500 $\pm$ 40 %	5.6	0.070	50	0.84	2 - 50	800
SRF1006-102Y	1000 $\pm$ 40 %	12	0.180	50	0.52	1 - 40	1400
SRF1006-202Y	2000 $\pm$ 40 %	0.23	0.270	50	0.40	0.5 - 15	2000
SRF1006-302Y	3000 $\pm$ 40 %	0.26	0.330	50	0.35	0.5 - 10	3000
SRF1006-402Y	4000 $\pm$ 40 %	0.27	0.550	50	0.30	0.5 - 5	4000
SRF1006-472Y	4700 $\pm$ 40 %	0.28	1.000	50	0.25	0.6 - 3	6200
SRF1006-502Y	5000 $\pm$ 40 %	0.29	0.620	50	0.25	0.5 - 3	5000

* Test condition: 0.1 V, 100 KHz


Schematic



Typical Part Marking



Recommended Layout

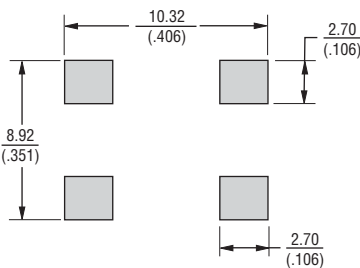

How to Order

Model **SRF1006 - 102 Y**

Value Code (see table)

Tolerance Code
Y = 40 %



Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116
Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510
The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700
www.bourns.com

General Specifications

Temperature Rise .. 45 °C at rated current
Hi-Pot

120 - 1000 μ H..... 1000 Vrms, 60 Hz,
3 mA, 1 min.
2000 - 5000 μ H..... 300 Vrms, 60 Hz,
3 mA, 1 min.

Operating Temperature

..... -40 °C to +105 °C
(Temperature rise included)


Storage Temperature .. -40 °C to +105 °C

Solderability..... 245 °C for 5 sec.
(JEDEC J-STD-020D)

Materials

Core Material..... Ferrite
Base Phenolic
Wire Enameled copper
Terminal coating Sn
Packaging..... 800 pcs. per 13-inch reel

Product Dimensions

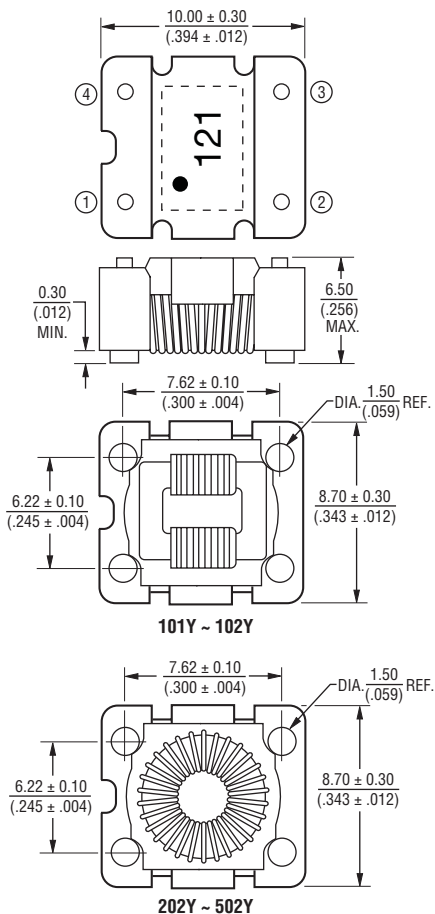

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.


Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications


SRF1006 Series - Line Filter

BOURNS®


Impedance Graph

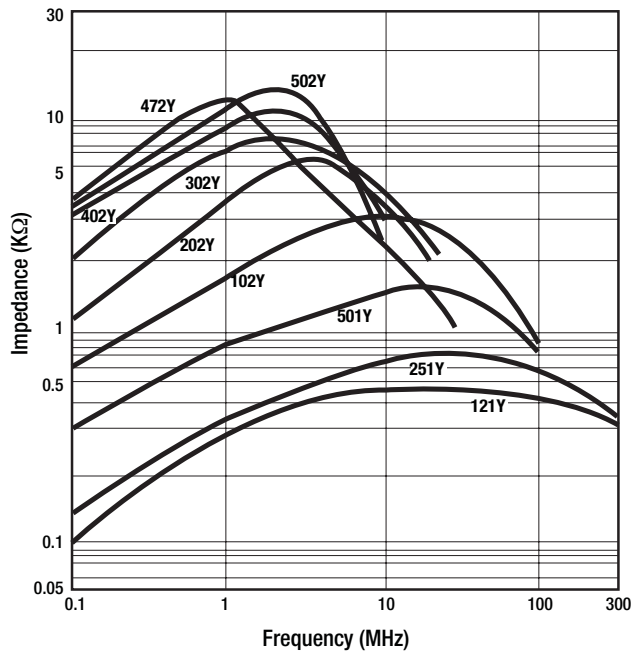

MEASURING CIRCUIT



Packaging Specifications

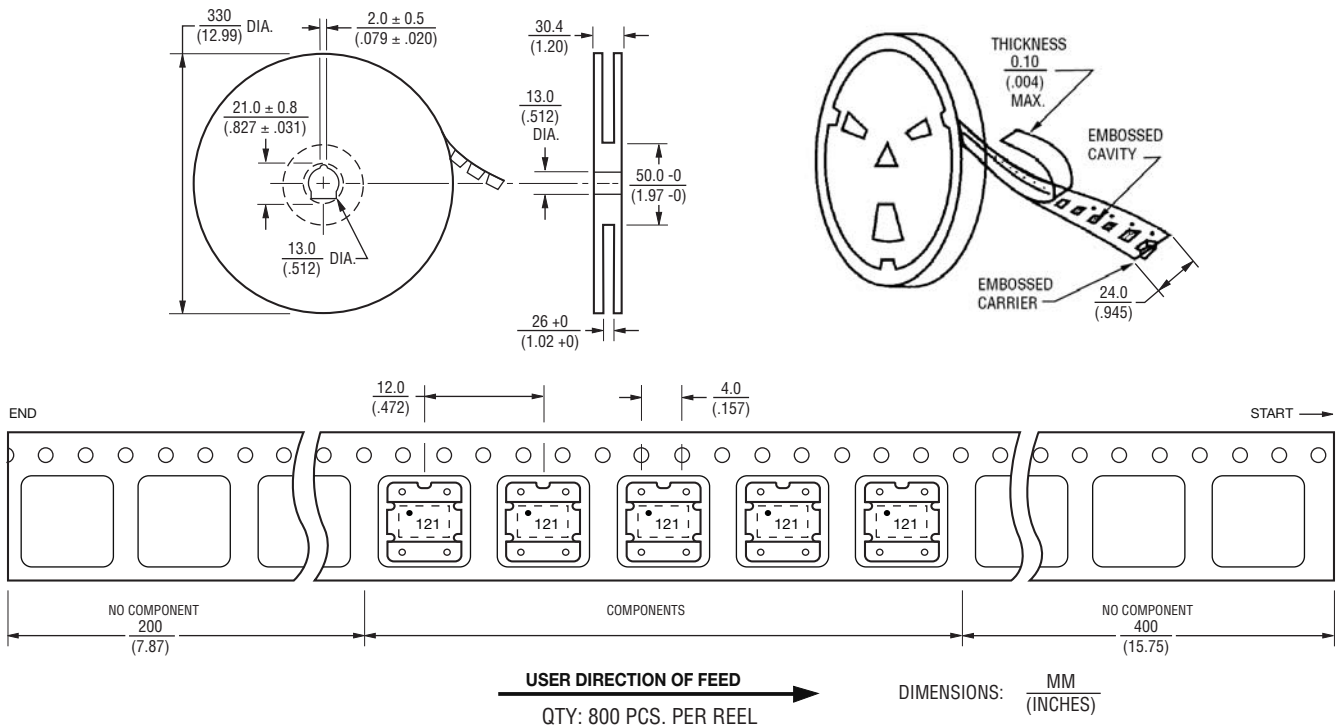

REV. 09/09

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[SRF1006-472Y](#) [SRF1006-251Y](#) [SRF1006-501Y](#) [SRF1006-102Y](#) [SRF1006-121Y](#) [SRF1006-202Y](#) [SRF1006-302Y](#)
[SRF1006-402Y](#) [SRF1006-502Y](#)