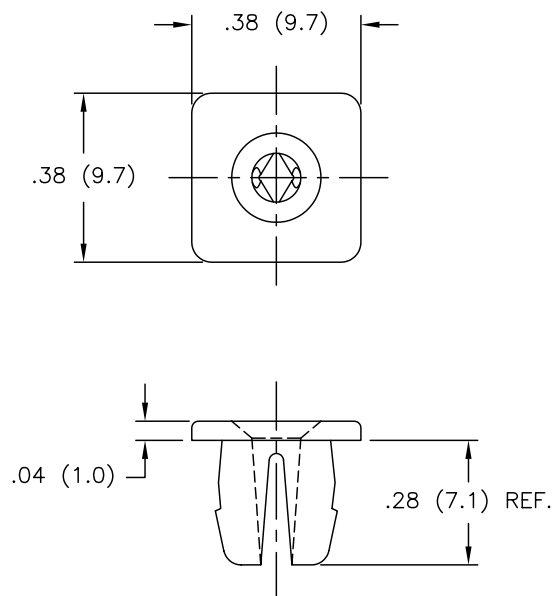


TYPICAL APPLICATION

NOTES:

1. MATERIAL: NYLON 66 (RMS-01), NAT.
2. PANEL THICKNESS RANGE T2:
.031-.125 (0.79-3.18)
3. SCREW SIZE: #6 SELF TAPPING
4. RECOMMENDED SCREW LENGTH=
T1 + .32 (8.1)
5. MOUNTING HOLE: .245 - .255
(6.22-6.48) SQUARE

5. MOUNTING HOLE: .245 - .255 (6.22-6.48) SQUARE			TITLE: SELF RETAINING SCREW GROMMET					DWG IN IN (MM)	
			TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=1/64 ANG=1°	FILE # SRSG MAT'L: SEE NOTES RE: RICHCO, INC.	DWN: P.B. DT: 07-08-94 DT:	APP:	FINAL	PRINT TYPE CA	
A	CHANGED FILE NO. AND TITLE BLOCK		SM 05.16.01	RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060			PART # SRSG6-04-01		
REV	DESCRIPTION		ENGR DATE						