



► **SS-40 SERIES**

0.039 (0.100) Centers

For R-00 Series Receptacles see pg. 52

BECU TIPS	DIAMETER
 <b>B</b>	0.020 (0.51) 
 <b>C</b>	0.020 (0.51) 
 <b>G</b>	0.020 (0.51) 
 <b>J</b>	0.020 (0.51) 
 <b>U</b>	0.020 (0.51) 

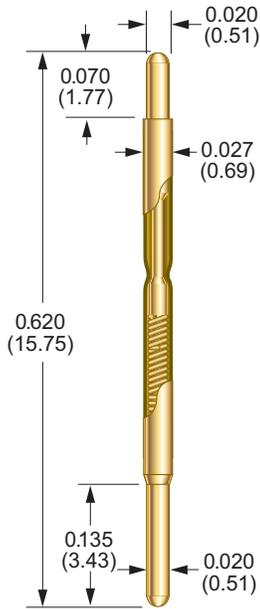

**PROBE SPECIFICATIONS**

<b>Minimum Centers</b>	0.039 (0.100)
<b>Current Rating</b>	3 A continuous
<b>Spring Force</b>	1.80 oz (51 g) or 2.40 oz (68 g) @ 0.050 (1.27) travel
<b>Preload Force</b>	1.10 oz (31 g) (1.80 oz spring/BeCu) 1.50 oz (43 g) (2.40 oz spring/stainless steel)
<b>Typical Resistance</b>	< 55 mΩ
<b>Maximum Travel</b>	0.050 (1.27)
<b>Working Travel</b>	0.050 (1.27)

**MATERIALS**

<b>Barrel</b>	Nickel/silver, preplated gold
<b>Spring</b>	Beryllium copper, or stainless steel, gold plated
<b>Plunger</b>	Beryllium copper, gold plated over nickel, or Duralloy™

**HOW TO ORDER**

SS - 40 - J - 1.8 - G	
	1 2 3 4 5
<b>1</b> ► SERIES	SS
<b>2</b> ► SIZE	40
<b>3</b> ► TIP STYLE	B, C, G, J, U
<b>4</b> ► SPRING FORCE	1.8 oz. 2.4 oz.
<b>5</b> ► PLUNGER PLATING	G GOLD D DURALLOY™