


表面安装肖特基二极管
反向电压 20 ---150 V
正向电流 2.0 A

Surface Mount Schottky Barrier Rectifier
Reverse Voltage 20 to 150 V
Forward Current 2.0 A

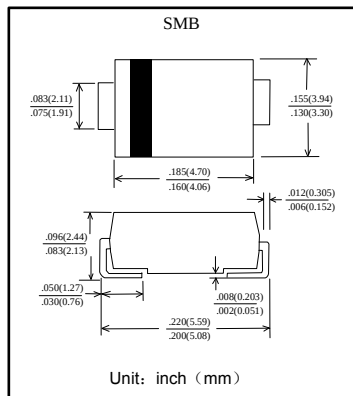

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒, 0.375" (9.5mm)引线长度。
260°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。 5 lbs. (2.3kg) tension
- 引线 and 管体皆符合RoHS标准 。
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。


Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	SS22B	SS24B	SS26B	SS210B	SS215B	单位 Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	100	150	V
最大反向有效值电压 Maximum RMS voltage	V _{R(RMS)}	14	28	42	70	105	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	20	40	60	100	150	V
最大正向平均整流电流 Maximum average forward rectified current	I _{FM}	2.0					A
最大正向电压降 Maximum forward voltage	IF = 2.0A V _F	0.50		0.7	0.85	0.92	V
正向峰值浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	50					A
最大反向漏电流 Maximum reverse current	TA = 25℃ TA = 100℃ I _R	0.5 10					mA
典型热阻 Typical thermal resistance	R _{θJA}	75					℃/W
典型结电容 Type junction capacitance	VR = 4.0V f = 1.0MHz C _j	130					pF
工作结温 Operating junction	T _j	-55 --- +125		-55 --- +150			℃
存储温度 Storage temperature range	T _{STG}	-55 --- +150					℃

特性曲线 Characteristic Curves


正向特性曲线（典型值）

TYPICAL FORWARD CHARACTERISTIC

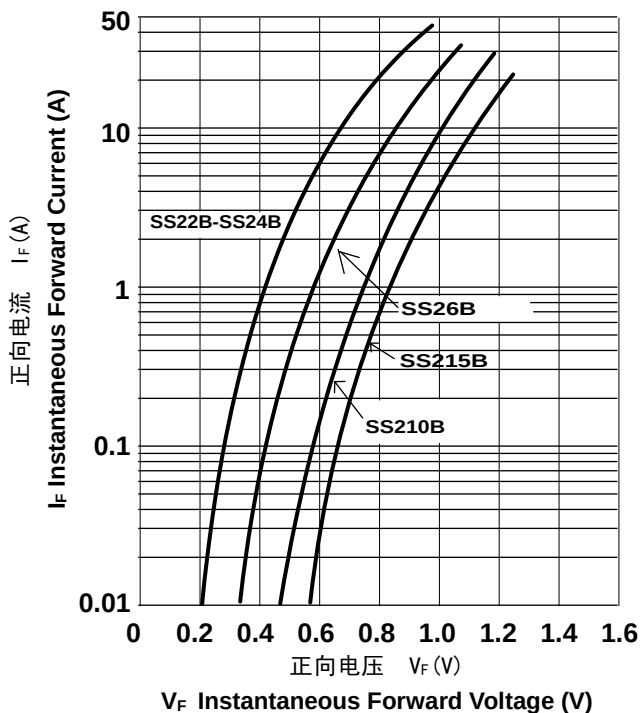

正向电流降额曲线

FORWARD CURRENT DERATING CURVE

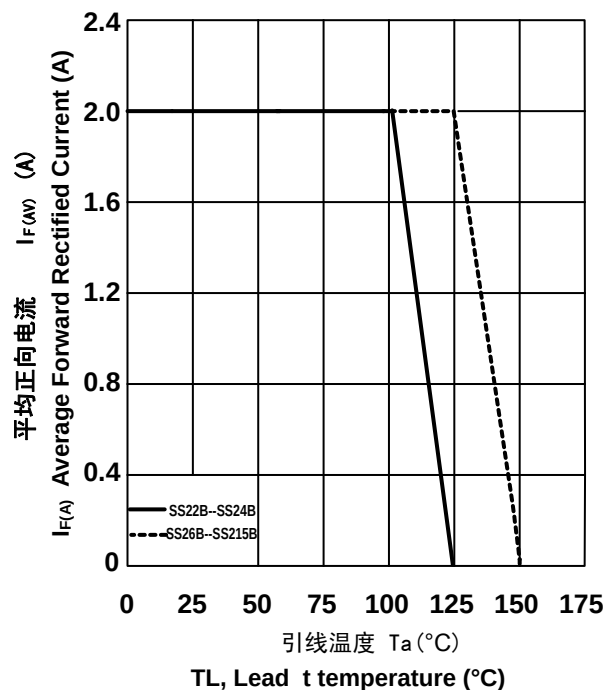

浪涌特性曲线（最大值）

MAXIMUM NON REPETITIVE
PEAK FORWARD SURGE CURRENT