

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00		0	EC 0G3C-0101-04	22JUL04	BSV

D

C

B

A

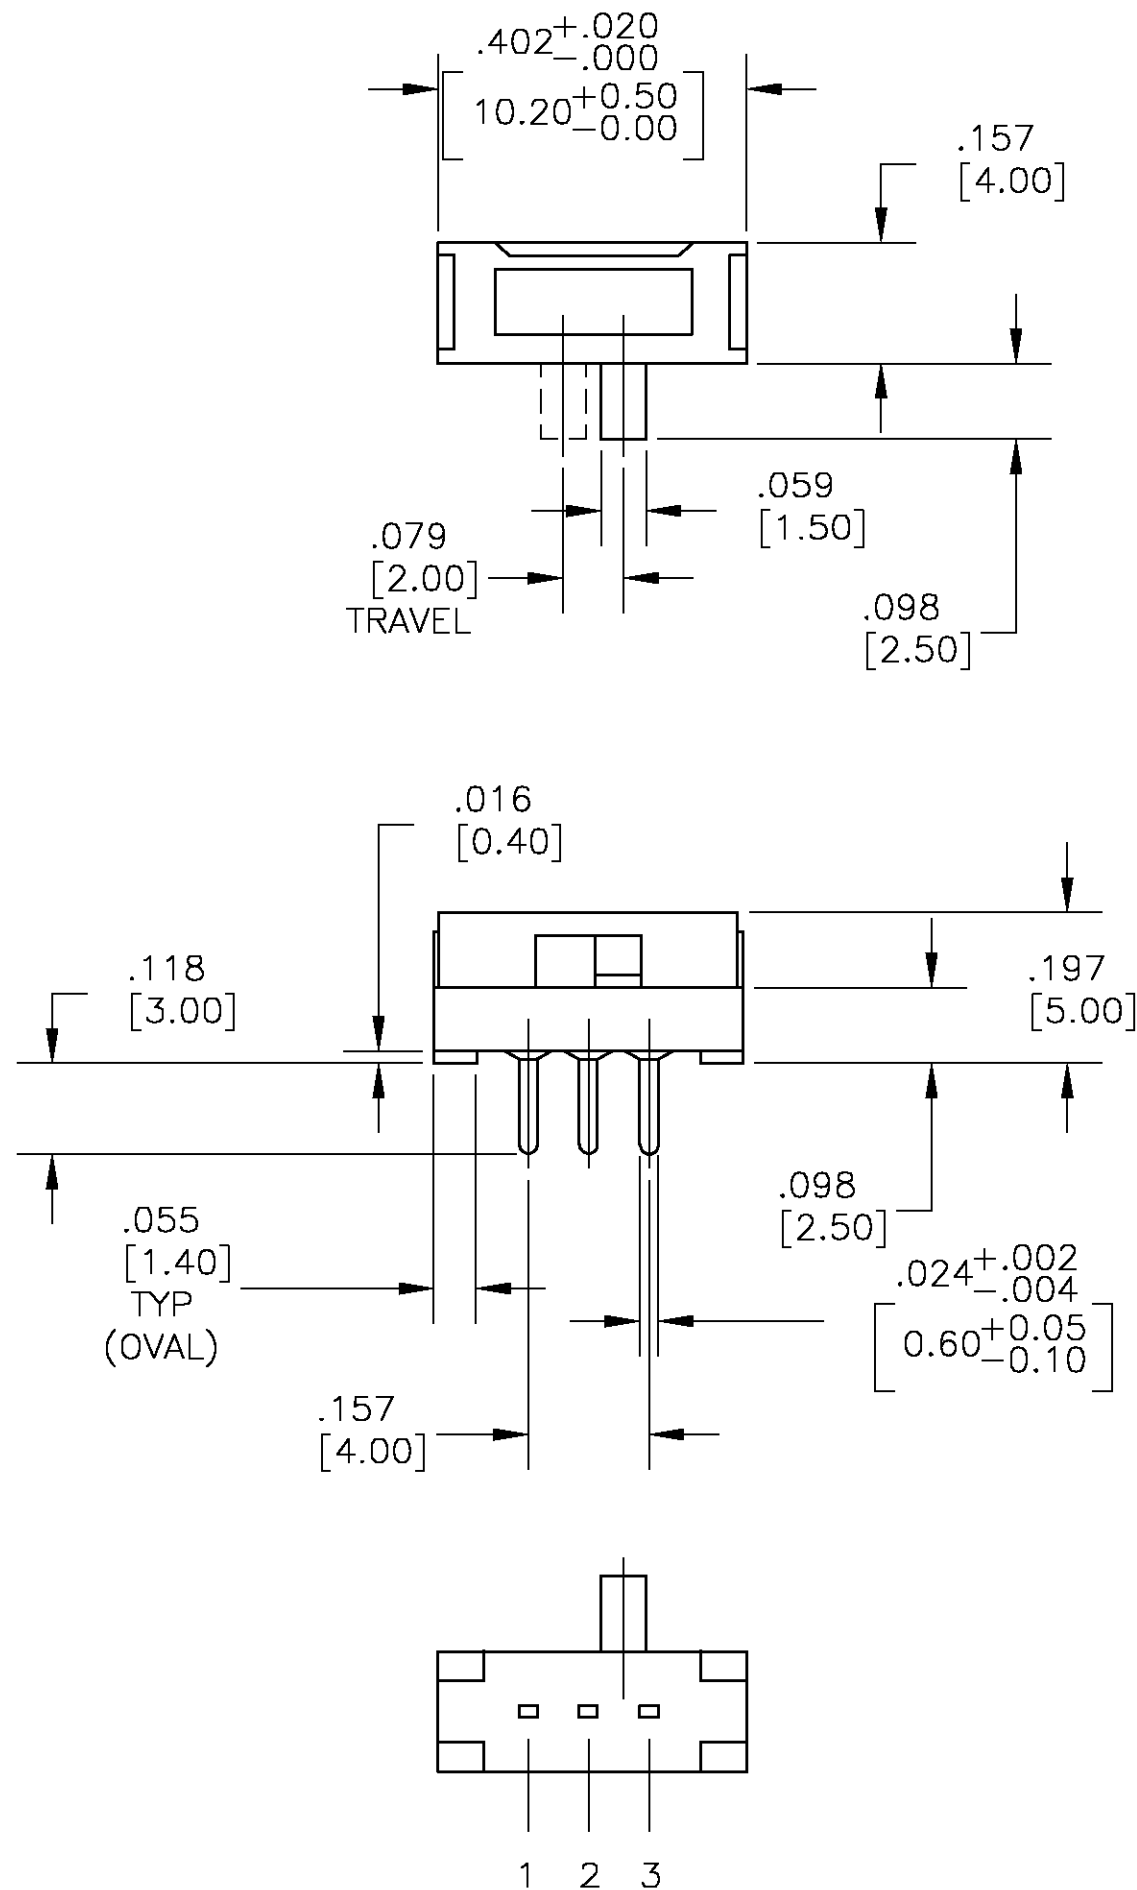

SPECIFICATIONS:
MAKE BEFORE BREAK

MATERIALS:
BASE: POLYESTER, UL94V-0
COVER: POLYACETAL
ACTUATOR: POLYACETAL
MOVABLE CONTACT: COPPER ALLOY, SILVER CLAD PLATE
FIXED CONTACT/TERMINAL: COPPER ALLOY, SILVER OVER NICKEL PLATE

ELECTRICAL:
CONTACT RATING: 100 MA @ 12 VDC.
CONTACT RESISTANCE: 30m MAX., INITIAL
INSULATION RESISTANCE: 100 M MIN.
DIELECTRIC STRENGTH: 500V RMS AT SEA LEVEL
LIFE EXPECTANCY: 10,000 OPERATIONS

MECHANICAL:
ACTUATION FORCE: 250 GRAMS, (+200 GRAMS, -150 GRAMS)

ENVIRONMENTAL:
OPERATING TEMPERATURE: -10°C TO +60°C (+14°F TO +140°F)
STORAGE TEMPERATURE: -20°C TO +60°C (+4°F TO +140°F)

1 ANTI-SOLDER WICK SEAL.

TYCO PT.NO.	MODEL No.	POS. 1	POS. 2
3-1437575-2	SSJ12R	2 TO 1	2 TO 3

TERMINALS CONNECTED WHEN SLIDER IS IN THE POSITION SHOWN.
NOTE: TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON SWITCHES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	22JUL04	Tyco Electronics Corporation Harrisburg, Pa 17105-3808	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010 4 PLC ± - ANGLES ± 1° FINISH	CHK -	APVD M.S.SARVER	NAME	
		PRODUCT SPEC	APPLICATION SPEC	LOW PROFILE SLIDE SWITCH (SSJ12R SERIES)	
MATERIAL SEE SPECIFICATIONS	-	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=3-1437575-2
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV 0	RESTRICTED TO -