

DATE	REVISIONS	REV	DRAWING NUMBER	REV
			22F-FX20at-31D	



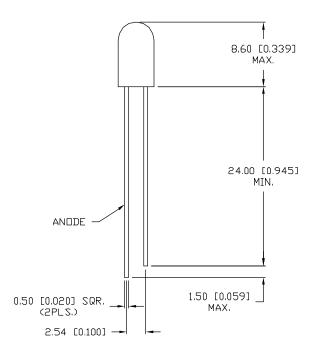

ELECTRO-OPTICAL CHARACTERISTICS $T_A = 25$ °C $I_f = 20$ mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INTENSITY VIEWING ANGLE EMITTED COLOR: EPOXY LENS FINISH:	5.0 RED RED	635 (RED) 2.0 40 60 DIFFUSED	2.5	nm V _f V _r mcd 2x theta	I _r = 100 µA I _f = 20 mA

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT* STEADY CURRENT POWER DISSIPATION DERATE FROM 25°C OPERATING, STORAGE TEMP. SOLDERING TEMP. 2.0mm FROM BODY	150 30 105 -1.2 -40 TO +85 +260	mA mA mW mW/*C *C *C 3 SEC. MAX

^{*} t<10µS

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359-2790

REV

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED.
EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT
SAME IN WHOLE OR IN PART FROM DISCIDSURE AND DISSEMINATION TO ALL THIRD PARTIES.

APPD: DWN: CHK'D: DATE: 3-5-98 SCALE: N/A

> T-5mm (T-1 3/4) FLANGELESS LED, RED, RED DIFFUSED.

DRAWING NUMBER PAGE 1 OF 1 SSL-LX509F3ID

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX509F3ID