

SSRD series

Dual AC Output “Hockey Puck”
Solid State Relay With
Paired SCR Outputs

cULus File E81606

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Features

- Two independent AC output solid state relays in one standard package.
- Enhanced noise immunity (designed to meet level 3 requirements of European EMC Directive).
- Inverse parallel SCR outputs.
- 25A rms & 40A rms versions available.
- Choose from 4-15 VDC or 17-32 VDC input control.
- Zero voltage and random voltage turn-on versions.
- 4000V rms optical isolation.
- Quick connect style terminals.

Engineering Data

Form: 2 Form A (2 SPST-NO).**Duty:** Continuous.**Isolation:** 4000V rms input-to-output;
2500V rms input or output to ground.**Capacitance:** 8.0 pf typical (input to output).**Temperature Range:****Storage:** -40°C to +100°C**Operating:** -40°C to + 80°C**Case Material:** Plastic, UL rated 94V-0.**Case and Mounting:** Refer to outline dimension.**Termination:** Refer to outline dimension.**Approximate Weight:** 3.5 oz. (98g).

Ordering Information

Sample Part Number ►

SSRD -240 D 25

1. Basic Series: SSRD = Dual output SSR - 2 SPST - NO**2. Line Voltage:** 240 = 24-280 VAC**3. Input Type & Voltage:** D = 4-15 VDC
DE = 17-32 VDC**4. Maximum Switching Rating/Output:** 25 = .1-25A rms @ 25°C, mounted to heatsink
40 = .1-40A rms @ 25°C, mounted to heatsink**5. Options:** Blank = Zero voltage turn-on (both outputs)
R = Random voltage turn-on (both outputs)**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**

SSRD-240D25

SSRD-240D40

Input Specifications



Parameter	Units	Zero V Turn-on and Random V Turn-on Units	
Control Voltage Range V_{IN}	VDC	4-15	17-32
Must Operate Voltage $V_{(INOPI)}$ (Min.)	VDC	3.75	17
Must Release Voltage $V_{(INREL)}$ (Min.)	VDC	1	1
Input Current (Max.)	mA DC	34	24
Input Current (Min. for On-State)	mA DC	7.5	13
Input Resistance	Ohms	500	1,500

Output Specifications (@ 25° C, unless otherwise specified)


Parameter	Conditions	Units	25A Models	40A Models
Load Voltage Range V_L	$f = 47 - 63 \text{ Hz.}$	V rms	24-280	
Peak Voltage (Min.)	$t = 1 \text{ Min.}$	V peak	550	
Load Current Range I_L^*	Resistive	A rms	0.1-25	0.1-40
Single Cycle Surge Current (Max.)		A peak	500	780
One Second Surge Current (Max.)		A peak	150	234
Leakage Current (Off-State) (Max.)	$V_L = 280 \text{V rms}$	mA rms	0.1	
On-State Voltage Drop (Max.)	$I_L = \text{Max.}$	V peak	1.4	1.3
Static dv/dt (Off-State) (Min.)		V/ μs	500	
Thermal Resistance, Junction to Baseplate ($R_{\theta JB}$) (Max.)	Both Sections On	°C/W	0.6	0.6
Turn-On Time (Max.)	$f = 60 \text{ Hz.}$	ms	8.33 for Zero Voltage Turn-On Models <0.1 for Random Voltage Turn-On Models	
Turn-Off Time (Max.)	$f = 60 \text{ Hz.}$	ms	8.33	
I^2t Rating	$t = 8.3 \text{ ms}$	A ² Sec.	1,041	2,435
Load Power Factor Rating	$I_L = \text{Max.}$		0.5 - 1.0	

*See Derating Curves

Electrical Characteristics (Thermal Derating Curves)

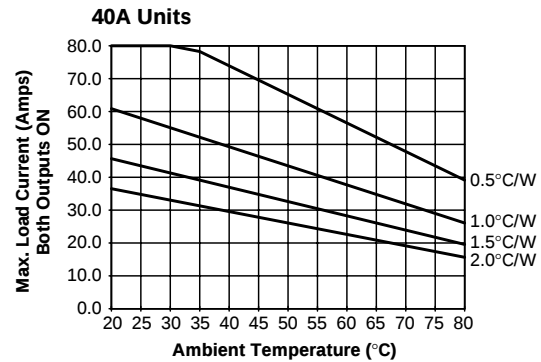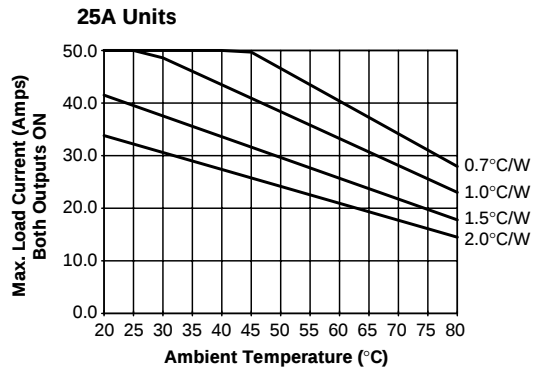

Operating Diagram

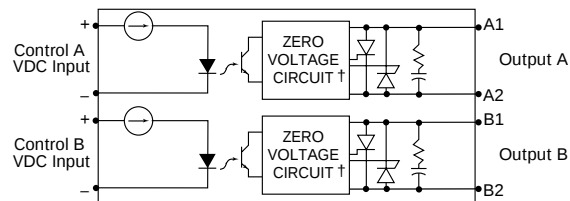


† Random Turn-on Units have a Random Turn-on circuit instead of Zero Voltage Circuit

Heatsink Recommendations

- We recommend that solid state relay modules be mounted to a heatsink sufficient to maintain the module's base temperature at less than 85°C under worst case ambient temperature and load conditions.
- The heatsink mounting surface should be a smooth (30-40 micro-inch finish), flat (30-40 micro-inch flatness across mating area), un-painted surface which is clean and free of oxidation.
- An even coating of thermal compound (Dow Corning DC340 or equivalent) should be applied to both the heatsink and module mounting surfaces and spread to a uniform depth of .002" to eliminate all air pockets.
- The module should be mounted to the heatsink using two #10 screws.

Outline Dimensions

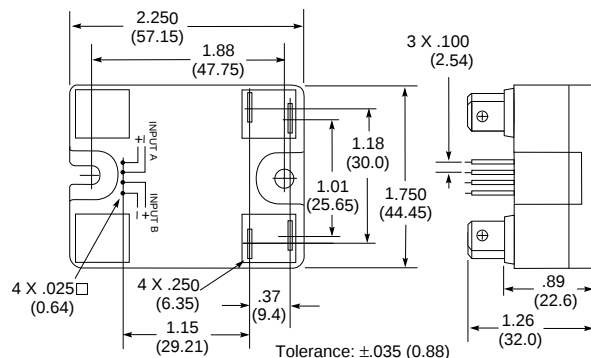

Input Terminal Connectors are available from several different manufacturers.

AMP P/N: 103976-3 or 640440-4
Methode P/N: 1300-004-422

Consult your local distributor for these or equivalent connectors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SSRD-240D40R](#) [SSRD-240DE40](#)