


Description

The SST6301K utilized advance processing techniques to achieve the lowest possible on-resistance, extermely efficient and cost-effectiveness device. The SST6301K is universally used for all commercial-industrial applications.


Features

- * RoHS Compliant
- * Simple Drive Requirement
- * Small Package Outline

SOT-26

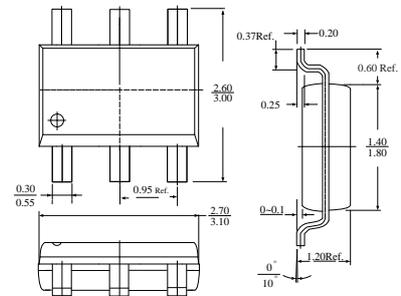

Dimensions in millimeters

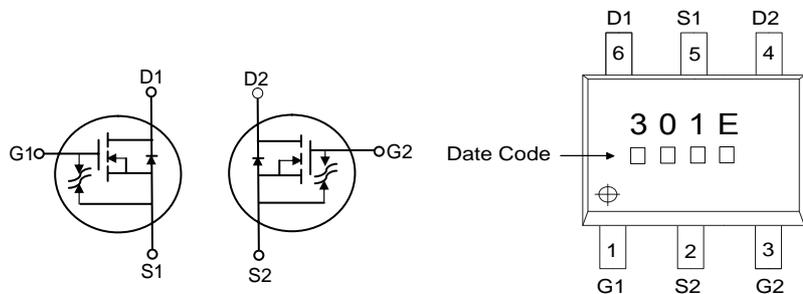

Absolute Maximum Ratings

| Parameter | Symbol | Ratings | Unit |
|--|----------------------|----------|------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ±16 | V |
| Continuous Drain Current, $V_{GS}@10V$ | $I_D@T_A=25^\circ C$ | 640 | mA |
| Continuous Drain Current, $V_{GS}@10V$ | $I_D@T_A=70^\circ C$ | 500 | mA |
| Pulsed Drain Current ^{1,2} | I_{DM} | 950 | mA |
| Total Power Dissipation | $P_D@T_A=25^\circ C$ | 1.2 | W |
| Linear Derating Factor | | 0.01 | W/°C |
| Operating Junction and Storage Temperature Range | T_j, T_{stg} | -55~+150 | °C |

Thermal Data

| Parameter | Symbol | Ratings | Unit |
|--|-------------|---------|------|
| Thermal Resistance Junction-ambient ³ (Max) | R_{thj-a} | 110 | °C/W |

Electrical Characteristics(T_j=25°C Unless otherwise specified)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|---|------------------------------------|------|------|------|------|--|
| Drain-Source Breakdown Voltage | BV _{DSS} | 30 | - | - | V | V _{GS} =0V, I _D = 250uA |
| Breakdown Voltage Temp. Coefficient | ΔBV _{DS} /ΔT _j | - | 0.06 | - | V/°C | Reference to 25°C, I _D = 1mA |
| Gate Threshold Voltage | V _{GS(th)} | 0.5 | - | 1.5 | V | V _{DS} =V _{GS} , I _D =250uA |
| Gate-Source Leakage Current | I _{GSS} | - | - | ± 10 | uA | V _{GS} =±16V |
| Drain-Source Leakage Current (T _j =25°C) | I _{DSS} | - | - | 1 | uA | V _{DS} =30V, V _{GS} =0 |
| Drain-Source Leakage Current (T _j =70°C) | | - | - | 100 | uA | V _{DS} = 24V, V _{GS} =0 |
| Static Drain-Source On-Resistance | R _{DS(ON)} | - | - | 1 | Ω | V _{GS} =10V, I _D =500mA |
| | | - | - | 2 | | V _{GS} =4.5V, I _D =400mA |
| | | - | - | 3 | | V _{GS} =2.7V, I _D =200mA |
| Total Gate Charge ² | Q _g | - | 1 | 1.6 | nC | I _D =600mA V _{DS} =50V V _{GS} =4.5V |
| Gate-Source Charge | Q _{gs} | - | 0.5 | - | | |
| Gate-Drain ("Miller") Charge | Q _{gd} | - | 0.5 | - | | |
| Turn-on Delay Time ² | T _{d(ON)} | - | 12 | - | nS | V _{DD} = 30V I _D = 600mA V _{GS} =10V R _G =3.3Ω R _D =52Ω |
| Rise Time | T _r | - | 10 | - | | |
| Turn-off Delay Time | T _{d(OFF)} | - | 56 | - | | |
| Fall Time | T _f | - | 29 | - | | |
| Input Capacitance | C _{iss} | - | 32 | 50 | pF | V _{GS} =0V V _{DS} =25V f=1.0MHz |
| Output Capacitance | C _{oss} | - | 8 | - | | |
| Reverse Transfer Capacitance | C _{rss} | - | 6 | - | | |
| Forward Transconductance | G _{fs} | - | 600 | - | mS | V _{DS} =10V, I _D =600mA |

Source-Drain Diode

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|---------------------------------|-----------------|------|------|------|------|--|
| Forward On Voltage ² | V _{SD} | - | - | 1.2 | V | I _S =1.2A, V _{GS} =0V. |

Notes: 1.Pulse width limited by Max. junction temperature.

2.Pulse width 300us, dutycycle 2%.

3.Surface mounted on 1 in²copper pad of FR4 board; 180°C/W when mounted on min. copper pad.

Characteristics Curve

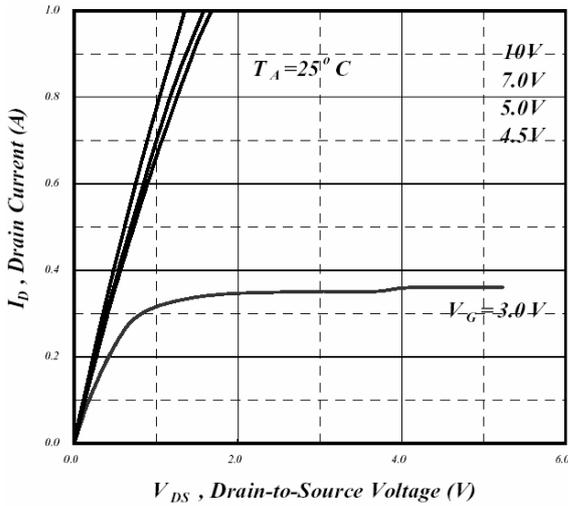


Fig 1. Typical Output Characteristics

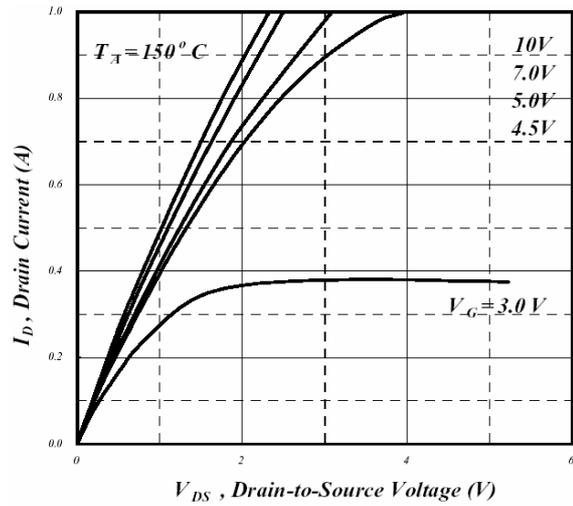


Fig 2. Typical Output Characteristics

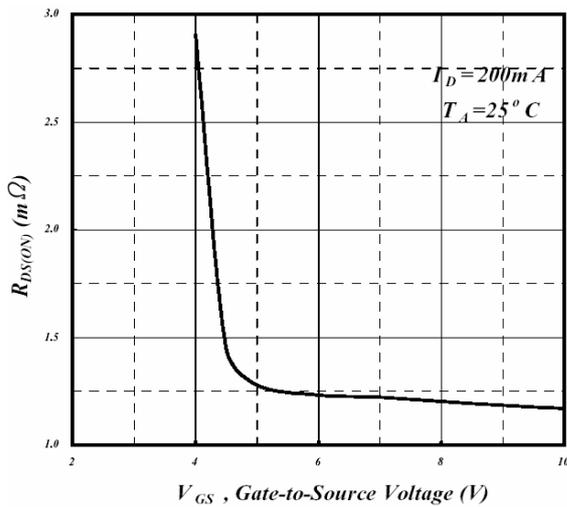


Fig 3. On-Resistance v.s. Gate Voltage

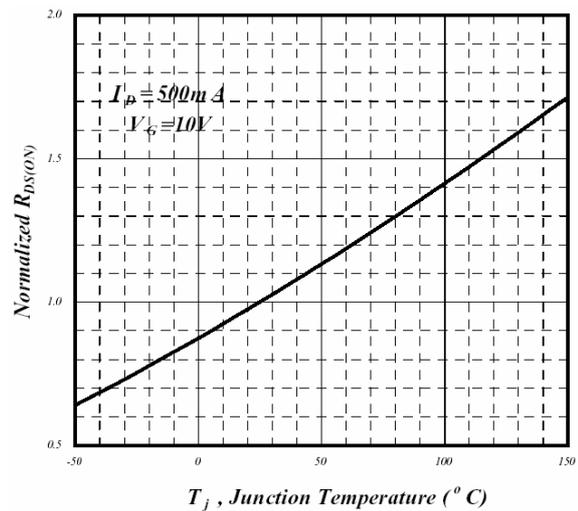


Fig 4. Normalized On-Resistance v.s. Junction Temperature

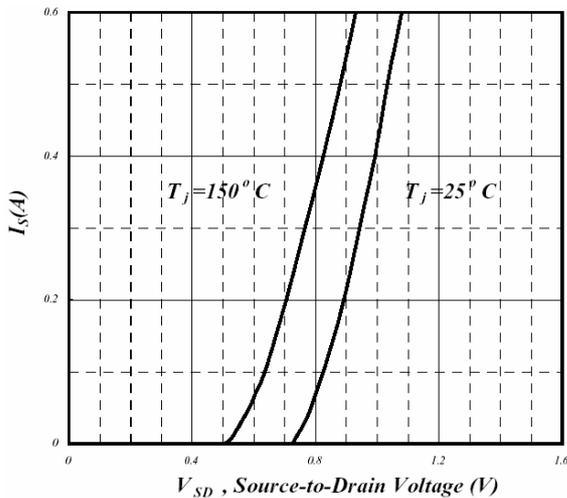


Fig 5. Forward Characteristics of Reverse Diode

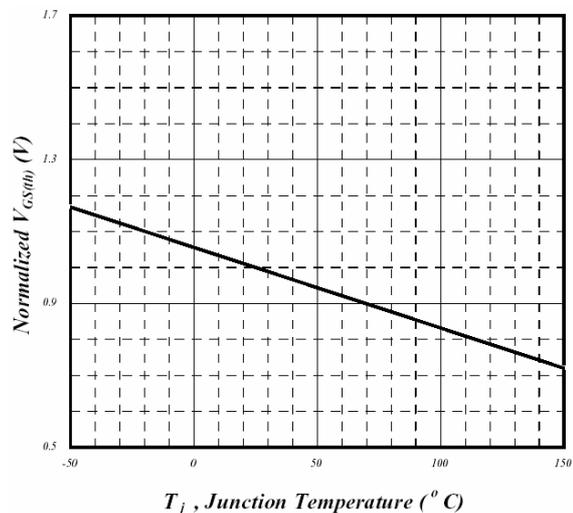


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

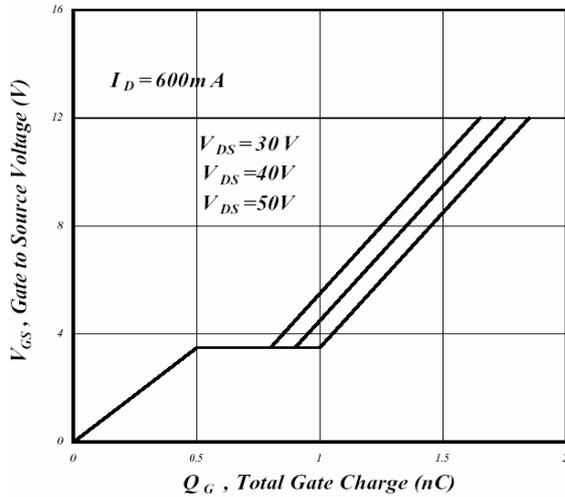


Fig 7. Gate Charge Characteristics

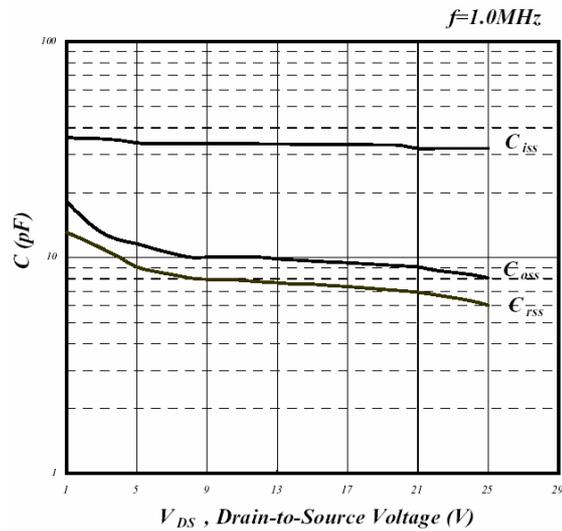


Fig 8. Typical Capacitance Characteristics

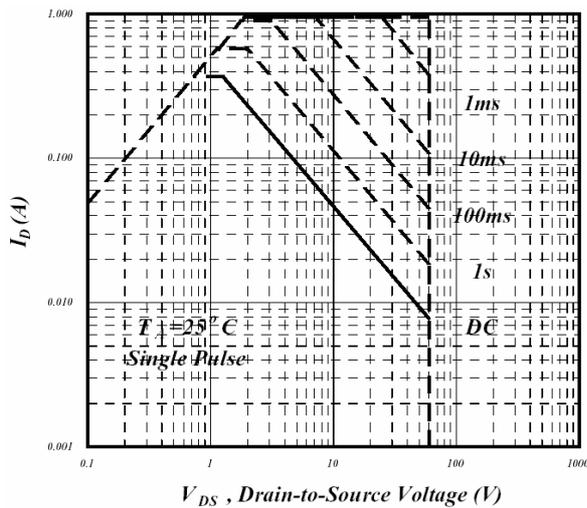


Fig 9. Maximum Safe Operating Area

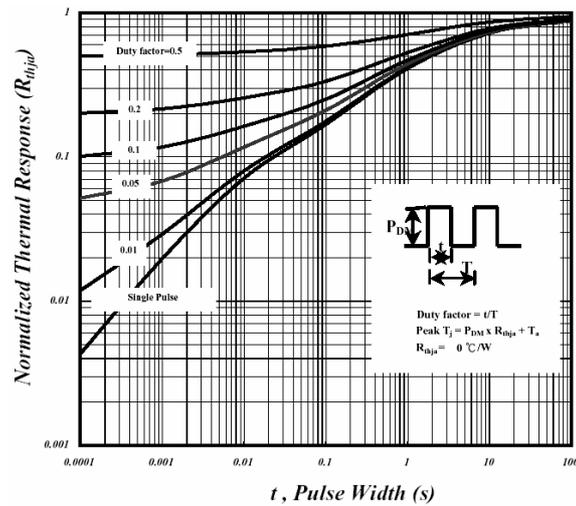


Fig 10. Effective Transient Thermal Impedance

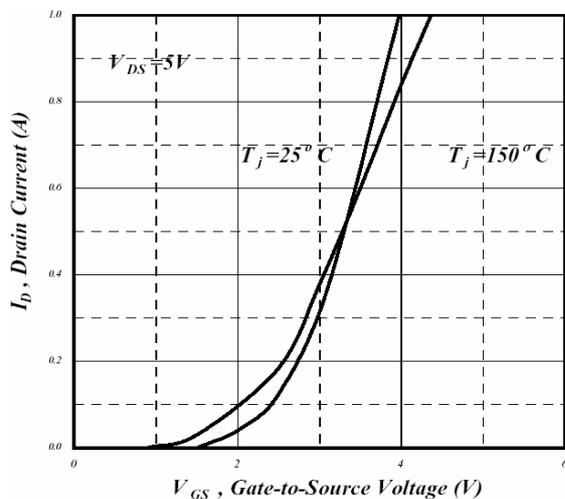


Fig 11. Transfer Characteristics

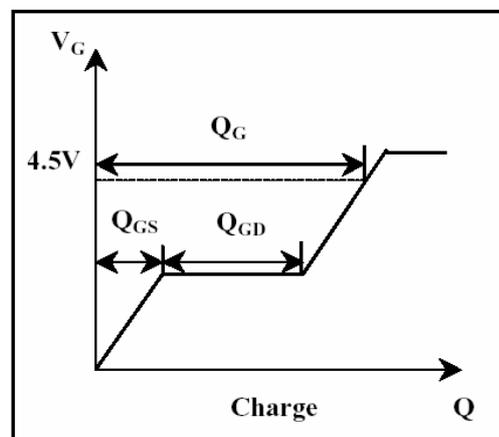


Fig 12. Gate Charge Waveform