

ORDER FORMAT

- ▶ 5 x 20mm fuses
- Finger grip or screwdriver slot knob options.
- Hand release and screwdriver release
- PC2 protection category
- Solder & 2.8mm terminals
- Raised or low profile bezels
- Snap in or threaded bushing mounting options
- Snap fit or screw to panel fixing



6.3A 250Vac (max fuse rating*) T-55 to T+70 (ambient) Maximum dissipation wattage: 1.5W



6.3A UL 94V2 UL file E92075 CSA file LR44770



RoHS compliant

These products comply with safety category PC2. *Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder/2.8) mid-body terminals. It has not been possible to show both views here.





Terminal Cover

In-line 5 x 20 fuseholder Extra low voltage 5A Max




S 71


0341


® **7.1** ©

Screwdriver release

2.8 x 0.5

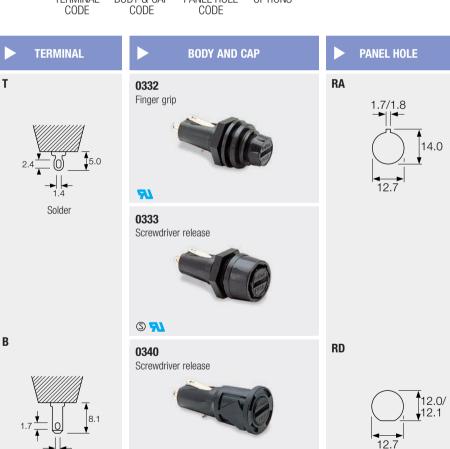








0333 (T terminal shown)

DIMENSIONS (mm)




Panel thickness 0.8-4.5mm



Panel thickness 0.8-4.5mm


0340 (T terminal shown)





Panel thickness 0.8-2.0mm

0341 (T terminal shown)





Panel thickness 0.8-4.5mm