

## T150L9X2

Heavy Duty Cable Tie, 175 lb. 32.28" Max. Bun. Dia. 9.65" PA66, Natural, 25/pk

Article Number: 111-15419

Part Number: T150L9X2

Type: T150L

Material: PA66




### 1. Base Data

---

|                    |   |
|--------------------|---|
| <b>Part No.</b>    | T150L9X2  |
| <b>Type</b>        | T150L   |
| <b>Color</b>       | Natural   |
| <b>Features</b>    | HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality. |
| <b>Application</b> | Used to bundle and secure wire and cable.   |

|                              |   |
|------------------------------|---|
| <b>Application Method</b>    | Quick, simple application by hand or with HellermannTyton tensioning tools. |
| <b>Label E-Number Norway</b> | 13 447 15   |

## 2. Product Dimensions

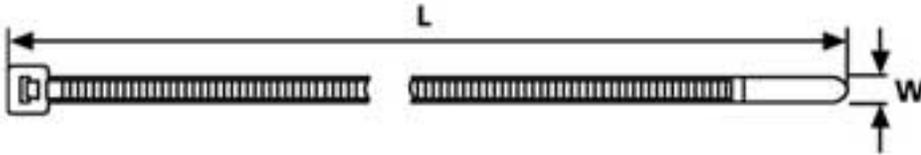

|                              |                  |
|------------------------------|------------------|
| <b>Min. Tensile Strength</b> | 175 lbs / 780 N  |
| <b>Length (L)</b>            | 32.28 " / 820 mm |
| <b>Width (W)</b>             | .35 " / 8.9 mm   |
| <b>Min. Ø Bundle</b>         | .31 " / 8.0 mm   |
| <b>Max. Ø Bundle</b>         | 9.65 " / 245 mm  |

## 4. Material and Specifications

|                              |   |
|------------------------------|---|
| <b>Material</b>              | Polyamide 6.6 (PA66)  |
| <b>Material Shortcut</b>     | PA66  |
| <b>Flammability</b>          | UL94 V2   |
| <b>Operating Temperature</b> | -40 °F to +185 °F (-40 °C to +85 °C)<br>continuous                                  |
| <b>ROHS Conformity</b>       |  |

## Logistic and Packaging


|                       |               |
|-----------------------|---------------|
| <b>Packaging Type</b> | bag           |
| <b>Pkg. Qty.</b>      | 25            |
| <b>Carton Qty.</b>    | 500           |
| <b>EAN code</b>       | 4031026106687 |
| <b>UPC</b>            | 08930606264   |

### **Miscellaneous**

---

**UL Recognized (US and Canada)** Yes

### Heavy Duty Cable Ties



| Material Data         |   |
|-----------------------|---|
| Material              | Polyamide 6.6 (PA66)                            |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability          | UL94 V2   |



### T120 Series



File# E64139

File# E64139

| Product Selection |                 |       |                     |                       |       |            |       |               |       |           |       |           |     |
|-------------------|-----------------|-------|---------------------|-----------------------|-------|------------|-------|---------------|-------|-----------|-------|-----------|-----|
| Article No.       | Part No.        | Type  | US Gov. Designation | Min. Tensile Strength |       | Length (L) |       | Max. Ø Bundle |       | Width (W) | Color | Pkg. Qty. |     |
|                   |                 |       |                     | lbs.                  | (N)   | in.        | (mm)  | in.           | (mm)  |           |       |           | in. |
| <b>T120S</b>      |                 |       |                     |                       |       |            |       |               |       |           |       |           |     |
| 111-12819         | <b>T120S9K2</b> | T120S | -                   | 120 lbs               | (535) | 8.85"      | (225) | 2.17"         | (55)  | .30"      | (7.6) | Natural   | 50  |
| 111-12813         | <b>T120S9H4</b> | T120S | -                   | 120 lbs               | (535) | 8.85"      | (225) | 2.17"         | (55)  | .30"      | (7.6) | Natural   | 500 |
| 111-12803         | <b>T120S0K2</b> | T120S | -                   | 120 lbs               | (535) | 8.85"      | (225) | 2.17"         | (55)  | .30"      | (7.6) | Black     | 50  |
| 111-12808         | <b>T120S0H4</b> | T120S | -                   | 120 lbs               | (535) | 8.85"      | (225) | 2.17"         | (55)  | .30"      | (7.6) | Black     | 500 |
| <b>T120I</b>      |                 |       |                     |                       |       |            |       |               |       |           |       |           |     |
| 111-12211         | <b>T120I9K2</b> | T120I | -                   | 120 lbs               | (535) | 11.81"     | (300) | 3.15"         | (80)  | .30"      | (7.6) | Natural   | 50  |
| 111-12213         | <b>T120I9H4</b> | T120I | -                   | 120 lbs               | (535) | 11.81"     | (300) | 3.15"         | (80)  | .30"      | (7.6) | Natural   | 500 |
| 111-12201         | <b>T120I0K2</b> | T120I | -                   | 120 lbs               | (535) | 11.81"     | (300) | 3.15"         | (80)  | .30"      | (7.6) | Black     | 50  |
| 111-12206         | <b>T120I0H4</b> | T120I | -                   | 120 lbs               | (535) | 11.81"     | (300) | 3.15"         | (80)  | .30"      | (7.6) | Black     | 500 |
| <b>T120R</b>      |                 |       |                     |                       |       |            |       |               |       |           |       |           |     |
| 112-12019         | <b>T120R9K2</b> | T120R | MS3367-3-9          | 120 lbs               | (535) | 15.24"     | (387) | 4.13"         | (105) | .30"      | (7.6) | Natural   | 50  |
| 111-12036         | <b>T120R9H4</b> | T120R | MS3367-3-9          | 120 lbs               | (535) | 15.24"     | (387) | 4.13"         | (105) | .30"      | (7.6) | Natural   | 500 |
| 112-12060         | <b>T120R0K2</b> | T120R | *                   | 120 lbs               | (535) | 15.24"     | (390) | 4.13"         | (105) | .30"      | (7.6) | Black     | 50  |
| 111-12013         | <b>T120R0H4</b> | T120R | *                   | 120 lbs               | (535) | 15.24"     | (387) | 4.13"         | (105) | .30"      | (7.6) | Black     | 500 |
| <b>T120L</b>      |                 |       |                     |                       |       |            |       |               |       |           |       |           |     |
| 111-12419         | <b>T120L9K2</b> | T120L | MS3367-6-9          | 120 lbs               | (535) | 30.0"      | (760) | 8.85"         | (225) | .30"      | (7.6) | Natural   | 50  |
| 111-12405         | <b>T120L0K2</b> | T120L | *                   | 120 lbs               | (535) | 30.0"      | (760) | 8.85"         | (225) | .30"      | (7.6) | Black     | 50  |

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes. \*Military black available. Contact HellaermannTyton for more information.

### T150 Series



File# E64139

| Product Selection |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
|-------------------|-------------------|----------|---------------------|-----------------------|-------|------------|--------|---------------|-------|-----------|-------|-----------|-----|
| Article No.       | Part No.          | Type     | US Gov. Designation | Min. Tensile Strength |       | Length (L) |        | Max. Ø Bundle |       | Width (W) | Color | Pkg. Qty. |     |
|                   |                   |          |                     | lbs.                  | (N)   | in.        | (mm)   | in.           | (mm)  |           |       |           | in. |
| <b>T150R</b>      |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15203         | <b>T150R9X2</b>   | T150R(U) | -                   | 175 lbs               | (780) | 15.35"     | (390)  | 4.13"         | (105) | .35"      | (8.8) | Natural   | 25  |
| 111-15200         | <b>T150R0X2</b>   | T150R(U) | -                   | 175 lbs               | (780) | 15.35"     | (390)  | 4.13"         | (105) | .35"      | (8.8) | Black     | 25  |
| <b>T150M</b>      |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15619         | <b>T150M9X2</b>   | T150M    | -                   | 175 lbs               | (780) | 21.00"     | (530)  | 5.91"         | (150) | .35"      | (8.9) | Natural   | 25  |
| 111-00124         | <b>T150M0X2</b>   | T150M    | -                   | 175 lbs               | (780) | 21.00"     | (530)  | 5.91"         | (150) | .35"      | (8.9) | Black     | 25  |
| <b>T150L</b>      |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15419         | <b>T150L9X2</b>   | T150L    | -                   | 175 lbs               | (780) | 32.28"     | (820)  | 9.65"         | (245) | .35"      | (8.9) | Natural   | 25  |
| 111-15405         | <b>T150L0X2</b>   | T150L    | -                   | 175 lbs               | (780) | 32.28"     | (820)  | 9.65"         | (245) | .35"      | (8.9) | Black     | 25  |
| <b>T150LL</b>     |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15719         | <b>T150LL9X2</b>  | T150LL   | -                   | 175 lbs               | (780) | 36.42"     | (925)  | 10.83"        | (275) | .35"      | (8.9) | Natural   | 25  |
| 111-15700         | <b>T150LL0X2</b>  | T150LL   | -                   | 175 lbs               | (780) | 36.42"     | (925)  | 10.83"        | (275) | .35"      | (8.9) | Black     | 25  |
| <b>T150XL</b>     |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15519         | <b>T150XL9X2</b>  | T150XL   | -                   | 175 lbs               | (780) | 43.11"     | (1095) | 13.00"        | (330) | .35"      | (8.9) | Natural   | 25  |
| 111-15500         | <b>T150XL0X2</b>  | T150XL   | -                   | 175 lbs               | (780) | 43.11"     | (1095) | 13.00"        | (330) | .35"      | (8.9) | Black     | 25  |
| <b>T150XLL</b>    |                   |          |                     |                       |       |            |        |               |       |           |       |           |     |
| 111-15304         | <b>T150XLL9X2</b> | T150XLL  | -                   | 175 lbs               | (780) | 52.17"     | (1325) | 15.95"        | (405) | .35"      | (8.9) | Natural   | 25  |
| 111-15300         | <b>T150XLL0X2</b> | T150XLL  | -                   | 175 lbs               | (780) | 52.17"     | (1325) | 15.95"        | (405) | .35"      | (8.9) | Black     | 25  |

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.