

# TERRACE SERIES T2200 STANDARD (S-06)

## FEATURES:

• Long Life

• Diffused Lens

• Directional Efficiency • Lead Free

• Low Profile






Color Temperature	Lumen Output	Efficacy (lm/W)	Color Rendering Index (CRI)
Cool (C) - 6500K	240	75	70
Neutral (N) - 4500K	225	71	76
Warm (W) - 3000K	220	65	80

Rated Life:	50,000 hours		
Beam Angle:	120°		
Power Consumption:	3.5 Watts		
Operating Temperature:	0° C ~+ 40° C		
Voltage Input:	24VDC, Constant Voltage		
Controls:	See Accessory SW-1001		
Housing:	Extruded Aluminum, Black Polycarbonate Lens, Clear		
Weight (g):	65		
Dimensions:	W .77" (19.6mm)		
	H .91" (23.2mm)		
	L 6" (152.4mm) ** **not including mounts		
Compliance:	(UL) CE (SROHS)		

Restriction of Hazardous Substances Directive (RoHS) implements EU Directive 2002 / 95 which bans placing electrical and hazardous equipment that contains more than agreed levels of hazardous substances on the EU market. For a list of these substances, visit www.rohs.gov.uk.

### **DIMENSIONS**

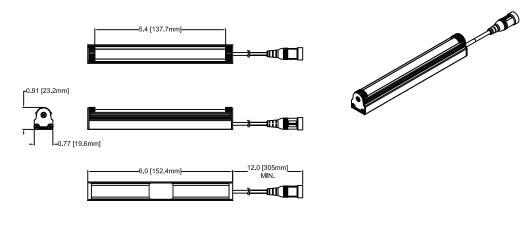



# TERRACE SERIES T2200 STANDARD (S-06)

#### ORDERING INFORMATION

Choose the option that best suits your needs and write its corresponding code on the appropriate line to form product code.

Model	Color	Type	Example
T2200	C - 6500K	S-06 Standard, 6"	T2200-C-S-06
	N - 4500K W - 3000K		

All luminaires are easily customizable. Please contact us to inquire about customizing a luminaire to fill your needs.


Order power accessories as separate catalog numbers from the Accessories section below. (Note: 2 mounting screws and double sided tape included for mounting of Standard luminaires)


#### ACCESSORIES


Universal Regulated Quick Connect Power Supply (North American Plug)
Universal Regulated Quick Connect Power Supply (Euro Plug)
In-line On/Off Switch

Califia Lighting Part #WA-UL-001 Califia Lighting Part #WA-VDE-001 Califia Lighting Part #SW-1001

#### PHOTOMETRY CHARACTERISTICS







# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**BIVAR**:

T2200-C-S-06