

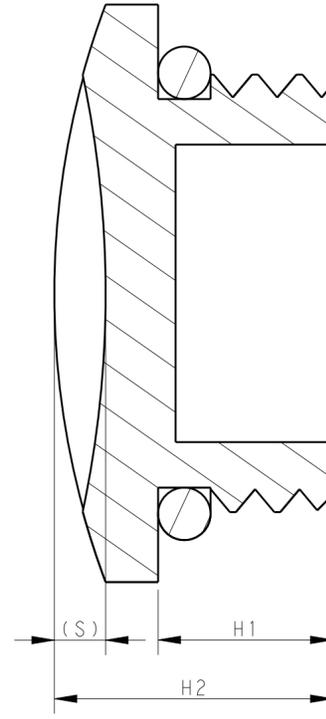


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		INITIAL RELEASE	07JUL2015	GY CW

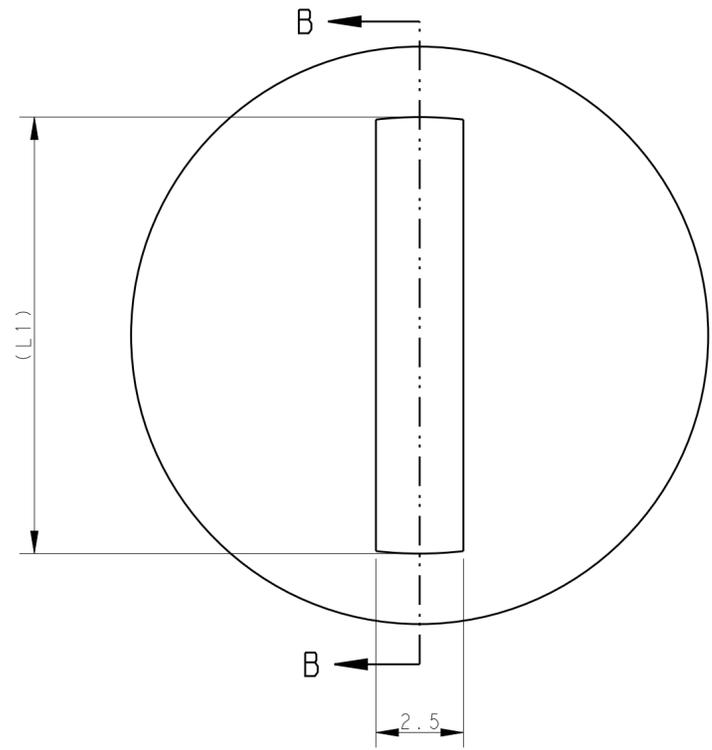


SECTION B-B

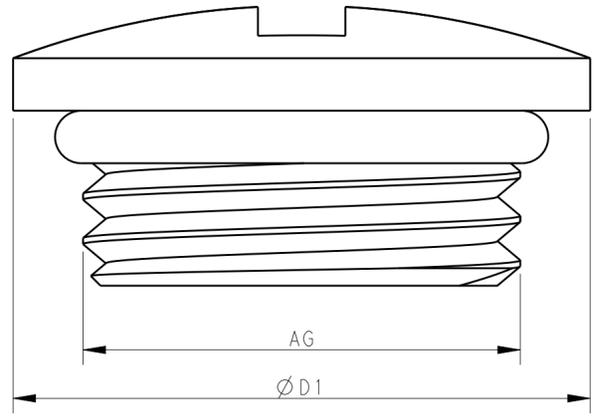

NOTES:

- I. TECHNICAL CHARACTERISTICS:
- BODY MATERIAL / 主体材料 :  
 BLIND-32-M-BX & BLIND-25-M-BX: STAINLESS STEEL / 不锈钢  
 OTHERS / 其余型号: NICKEL PLATED BRASS / 黄铜镀镍
- SEAL MATERIAL / 密封圈材料: NBR
- OPERATION TEMPERATURE / 工作温度: -40°C ~ +100°C
- PROTECTION DEGREE / 防护等级: IP65

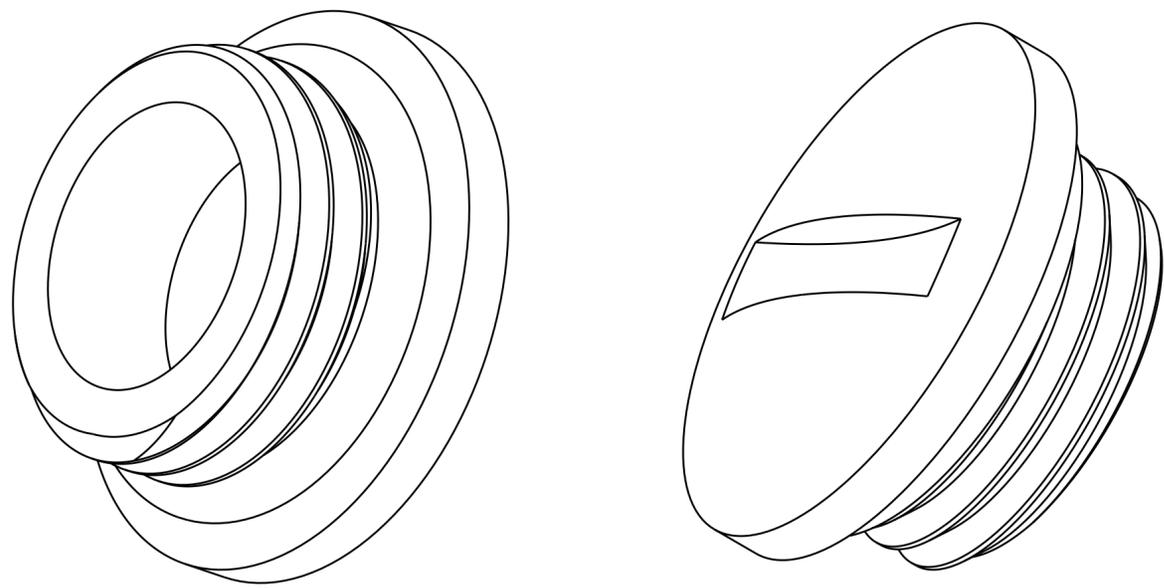

PG7	16.5	5	8	1.5	11	BLIND-7-MS	T3165070101-000
PG9	19	6	9	1.5	12.5	BLIND-9-MS	T3165090101-000
PG11	22.5	6	9	1.5	12	BLIND-11-MS	T3165110101-000
PG13.5	24.5	7	10	1.5	14.5	BLIND-13-MS	T3165130101-000
PG16	26.5	7	10	5	17	BLIND-16-MS	T3165160101-000
PG21	32	7	11	2.5	19	BLIND-21-MS	T3165210101-000
PG29	41	8	12	2.5	20.5	BLIND-29-MS	T3165290101-000
PG36	51	9	15	3.5	24	BLIND-36-MS	T3165360101-000
PG42	58	10	16	3.5	26	BLIND-42-MS	T3165420101-000
PG48	64	10	16	3.5	27	BLIND-48-MS	T3165480101-000
M12X1.5	16	5	8	1.5	11	BLIND-12-M	T3165120111-000
M16X1.5	20	6	9	1.5	12	BLIND-16-M	T3165160111-000
M20X1.5	24	7	10	1.5	14.5	BLIND-20-M	T3165200111-000
M25X1.5	29	7	10	2	18	BLIND-25-M	T3165250111-000
M32X1.5	36	8	12	2.5	19	BLIND-32-M	T3165320111-000
M40X1.5	22	9	15	3.5	23	BLIND-40-M	T3165400111-000
M50X1.5	54	10	16	3.5	24	BLIND-50-M	T3165500111-000
M25X1.5	29	7	10	2	18	BLIND-25-M-BX	T3165250111-100
M32X1.5	36	8	12	2.5	19	BLIND-32-M-BX	T3165320111-100
AG	ØD1	H1	H2	S	L1	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: Gino Yao 06JUL2015  
 CHK: Chris Wang 06JUL2015  
 APVD: Xiang Xu 06JUL2015

**STE** TE Connectivity

NAME: Metal blind plug

SIZE: A2 CAGE CODE: - DRAWING NO: T3165XX01XXX00 RESTRICTED TO: -

MATERIAL: - DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±, 2 PLC ±, 3 PLC ±, 4 PLC ±, ANGLES ±, FINISH -

Customer Drawing SCALE: 7:1 SHEET 1 OF 1 REV A