


PDF Technical File

Visitors to this web site are authorized to download this information for reprints or electronic transfer to their technical reference files.








cable clamp

Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25,4 mm) diameter. Holes are provided for screw mounting.



PART No.	A		B		C		D		E		F		IMPEDANCE IN OHMS
TC28B0550	.685	17,4	1.105	28,1	.685	17,4	.214	5,4	1.102	28,0	.195	5,0	281 @ 100MHz
TC28B0617	.740	18,8	1.125	28,6	.740	18,8	.276	7,0	1.215	30,9	.195	5,0	273 @ 100MHz
TC28B0642	.785	19,9	.630	16,0	.785	19,9	.320	8,1	1.335	33,9	.195	5,0	100 @ 100MHz
TC28B0805	.948	24,1	.500	12,7	.948	24,1	.404	10,3	1.498	38,0	.195	5,0	73 @ 100MHz
TC28B0937	1.127	28,6	.551	14,0	1.127	28,6	.449	11,4	1.677	42,6	.195	5,0	117 @ 100MHz
TC28B1123	1.320	33,5	1.125	28,6	1.320	33,5	.543	13,8	2.000	50,8	.195	5,0	220 @ 100MHz
TC28B0984	1.127	28,6	.500	12,7	1.127	28,6	.591	15,0	1.677	42,6	.195	5,0	62 @ 100MHz
TC28B1251	1.375	34,9	.875	22,2	1.375	34,9	.750	19,1	1.884	47,9	.195	5,0	138 @ 100MHz
TC28B1501	1.628	41,4	1.000	25,4	1.628	41,4	.750	19,1	2.150	55,5	.195	5,0	177 @ 100MHz
TC28B1500	1.628	41,4	1.000	25,4	1.628	41,4	1.000	25,4	2.150	55,5	.195	5,0	133 @ 100MHz
TC28B2000	2.125	54,0	1.500	38,1	2.125	54,0	1.000	25,4	2.860	72,6	.281	7,1	380 @ 100MHz

For specific performance by part number, find the alpha-numeric designation on the charts below according to the last seven digits of each catalog part number; i.e., for part number "CS28B1937" see "28B1937" on the chart.

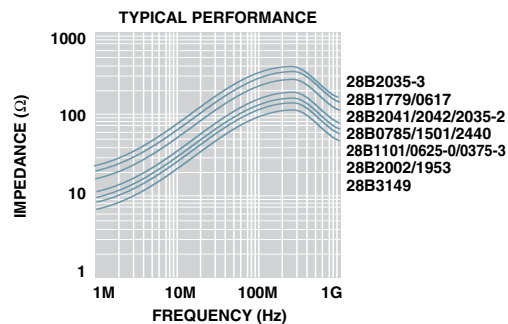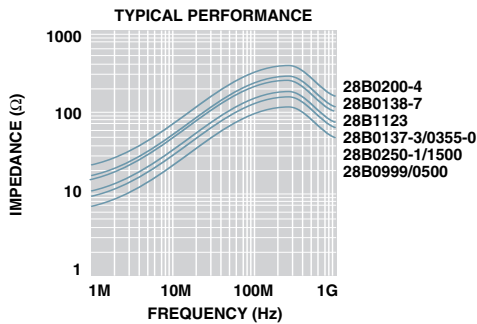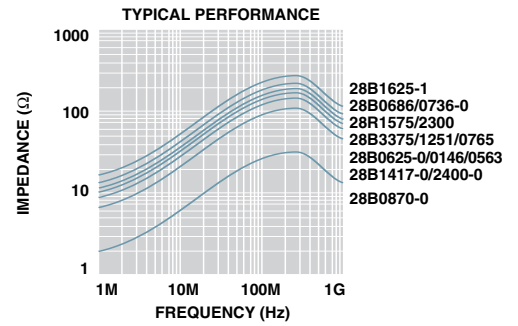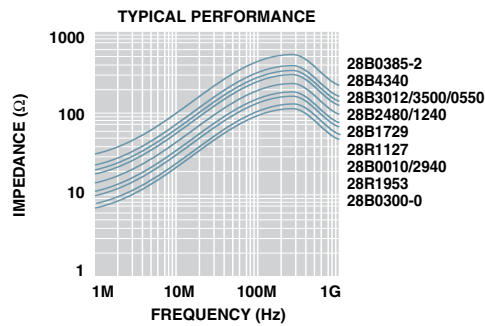

For further technical information, please contact us at:

FerriShield[®], INC.
Interference Control Components

Mulberry Professional Plaza • 426 Mulberry Street * Suite 300 • Scranton, PA 18503
Tel: 570.961.5617 • Fax: 570.969.6274 • e-mail: info@ferrishield.com

www.ferrishield.com

ISO 9001:2000 registered