

## Specification Status: Released


### Max Electrical Rating at 20°C

Operating Voltage: 60V<sub>DC</sub>

Fault Voltage: 250V<sub>RMS</sub>

Interrupt Current: 3A<sub>RMS</sub>

#### Marking:

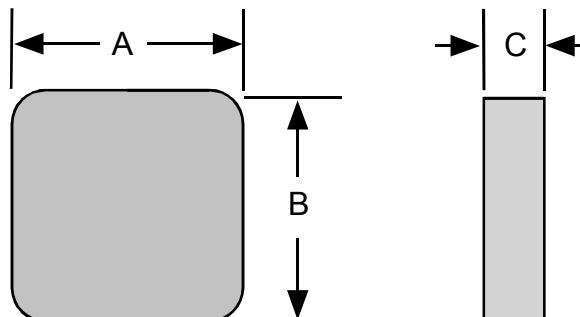

**TABLE I. DIMENSIONS:**

	A		B		C	
	MIN	MAX	MIN	MAX	MIN	MAX
mm:	5.4	5.6	5.4	5.6	2.0	2.3
in:	(0.213)	(0.221)	(0.213)	(0.221)	(0.079)	(0.091)

**TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):**

IHOLD (A)**		RESISTANCE (Ω)			TIME TO TRIP (s) @ 1A		OPERATING TEMPERATURE (°C)	
20°C	40°C	R MIN	R MAX	R <sub>1 MAX</sub> *	TYP	MAX	MIN	MAX
0.120	--	5.0	9.0	14.0	0.9	1.5	-40	85

\* Maximum device resistance at 20°C measured 1 hour post trip.

\*\* Dependent on Heat Sinking of Mounting Fixture.

#### Additional Ratings @ 20°C

Lightning Withstand ITU AT 1.5kV

#### Reference Documents:

PS300

#### Precedence:

This specification takes precedence over documents referenced herein.

#### Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

#### CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

## Materials Information

#### ROHS Compliant

Directive 2002/95/EC  
Compliant

#### ELV Compliant

Directive 2000/53/EC  
Compliant

#### Pb-Free

