

Type TCX 105 °C, Axial Leaded Aluminum Electrolytic Capacitors

Extended Life Computer Grade Capacitor



Type TCX is an axial leaded, 105 °C, 2000 h extended life industrial and computer grade quality aluminum electrolytic capacitor with low DCL and ESR and is suitable for computer applications.

Highlights

- 105 °C rated
- Computer grade
- Low DCL and ESR

Specifications

Capacitance Range:	27 to 12,000 μ F
Voltage Range:	10 to 150 WVdc
Capacitance Tolerance:	10 to 75 WVdc, -10 +75% 100 to 150 WVdc, -10 +50%
Operating Temperature Range:	-55 °C to 105 °C
DC Leakage Current:	$I = 2 \sqrt{CV}$ after 5 minutes Not to exceed 2 mA @ 25 °C I = leakage current in μ A C = Capacitance in μ F V = Rated voltage

Ripple Current Multipliers:


Rated WVdc 0 to 150	Ripple Multipliers			
	60 Hz	400 Hz	1000 Hz	2400 Hz
	0.8	1.05	1.10	1.14

Ambient Temp.	+45 °C	+55 °C	+65 °C	+75 °C	+85 °C	+95 °C
Ripple Multiplier	1.7	1.58	1.4	1.2	1.0	0.7

QA Stability Test:

- Apply WVdc for 2,000 h at 105 °C
- Capacitance change $\pm 15\%$ from initial limits
 - DC leakage current meets initial limits
 - ESR $\leq 150\%$ of initial measured value

Outline Drawing

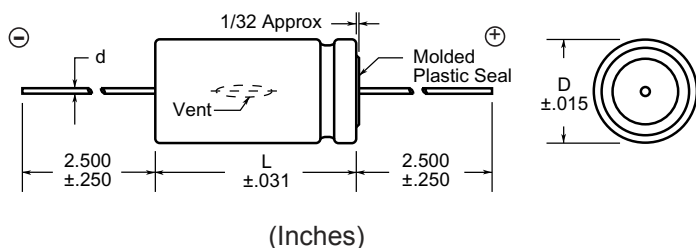

Parts are supplied with PVC insulating sleeve.
Add .010" to diameter and .125" max
to length to allow for insulation.

Type TCX 105 °C, Axial Leaded Aluminum Electrolytic Capacitors

Ratings

Cap (µF)	Catalog Part Number	Max ESR 120 Hz 25 °C (Ω)	Max Ripple 120 Hz 85 °C (A)	Size		
				Diameter D (Inches)	Length L (Inches)	Lead Wire (d)
10 WVdc (12 Vdc Surge)						
10,000	TCX103U010L3C	0.024	5.952	0.875	3.125	0.040
15 WVdc (20 Vdc Surge)						
1,000	TCX102U015J1C	0.145	1.394	0.750	1.125	0.040
2,100	TCX212U015J1L	0.071	2.337	0.750	1.625	0.040
8,200	TCX822U015N2L	0.025	5.796	1.000	2.625	0.040
12,000	TCX123U015N3L	0.019	7.589	1.000	3.625	0.040
25 WVdc (30 Vdc Surge)						
1,200	TCX122U025N1C	0.109	1.899	1.000	1.125	0.040
1,800	TCX182U025L1L	0.071	2.557	0.875	1.625	0.040
2,400	TCX242U025N1L	0.057	3.081	1.000	1.625	0.040
3,700	TCX372U025L2L	0.037	4.370	0.875	2.625	0.040
7,200	TCX722U025N3L	0.023	6.882	1.000	3.625	0.040
30 WVdc (40 Vdc Surge)						
310	TCX311U030G1C	0.316	0.852	0.625	1.125	0.032
470	TCX471U030J1C	0.214	1.149	0.750	1.125	0.040
1,400	TCX142U030J2C	0.075	2.583	0.750	2.125	0.040
2,700	TCX272U030L2L	0.043	4.091	0.875	2.625	0.040
3,000	TCX302U030L3C	0.039	4.643	0.875	3.125	0.040
40 WVdc (50 Vdc Surge)						
360	TCX361U040J1C	0.230	1.107	0.750	1.125	0.040
1,000	TCX102U040L1L	0.088	2.290	0.875	1.625	0.040
1,400	TCX142U040J2L	0.063	3.107	0.750	2.625	0.040
2,100	TCX212U040L2L	0.045	3.975	0.875	2.625	0.040

Cap (µF)	Catalog Part Number	Max ESR	Max Ripple	Size		Lead Wire (d)
		120 Hz 25 °C (Ω)	120 Hz 85 °C (A)	Diameter D (Inches)	Length L (Inches)	
40 WVdc (50 Vdc Surge)						
4,200	TCX422U040N3L	0.028	6.361	1.000	3.625	0.040
50 WVdc (65 Vdc Surge)						
250	TCX251U050G1G	0.306	0.947	0.625	1.375	0.032
370	TCX371U050L1C	0.216	1.250	0.875	1.125	0.040
500	TCX501U050G2C	0.155	1.624	0.625	2.125	0.032
710	TCX711U050N1G	0.118	1.989	1.000	1.375	0.040
950	TCX951U050N1L	0.089	2.456	1.000	1.625	0.040
1,400	TCX142U050L2L	0.061	3.436	0.875	2.625	0.040
1,900	TCX192U050N2L	0.047	4.170	1.000	2.625	0.040
2,800	TCX282U050N3L	0.035	5.655	1.000	3.625	0.040
75 WVdc (95 Vdc Surge)						
65	TCX650U075G1C	2.961	0.419	0.625	1.125	0.032
100	TCX101U075J1C	1.932	0.574	0.750	1.125	0.040
560	TCX561U075L2L	0.115	2.491	0.875	2.625	0.040
740	TCX741U075N2L	0.090	3.033	1.000	2.625	0.040
1,100	TCX112U075N3L	0.084	3.633	1.000	3.625	0.040
100 WVdc (125 Vdc Surge)						
110	TCX111T100L1G	.404	0.996	0.875	1.375	0.040
150	TCX151T100L1L	0.297	1.248	0.875	1.625	0.040
150 WVdc (175 Vdc Surge)						
27	TCX270T150G1C	5.720	0.322	0.625	1.125	0.032
150	TCX151T150J2L	0.404	1.224	0.750	2.625	0.040

Case Code Format for Type TCX

Case Code Chart						
Case Code	Inches		Millimeters		d	
	D	L	D	L	Inches	AWG
E1G	0.500	1.375	12.7	34.9	0.032	#20
E2C	0.500	2.125	12.7	53.9	0.032	#20
G1C	0.625	1.125	15.9	28.6	0.032	#20
G1G	0.625	1.375	15.9	34.9	0.032	#20
G1L	0.625	1.625	15.9	41.3	0.032	#20
G2C	0.625	2.125	15.9	53.9	0.032	#20
G2L	0.625	2.625	15.9	66.7	0.032	#20
G3C	0.625	3.125	15.9	79.4	0.032	#20
G3L	0.625	3.625	15.9	92.1	0.032	#20
J1C	0.750	1.125	19.1	28.6	0.040	#18
J1G	0.750	1.375	19.1	34.9	0.040	#18
J1L	0.750	1.625	19.1	41.3	0.040	#18
J2C	0.750	2.125	19.1	53.9	0.040	#18
J2L	0.750	2.625	19.1	66.7	0.040	#18
J3C	0.750	3.125	19.1	79.4	0.040	#18

Case Code Chart						
Case Code	Inches		Millimeters		d	
	D	L	D	L	Inches	AWG
J3L	0.750	3.625	19.1	92.1	0.040	#18
L1C	0.875	1.125	22.2	28.6	0.040	#18
L1G	0.875	1.375	22.2	34.9	0.040	#18
L1L	0.875	1.625	22.2	41.3	0.040	#18
L2C	0.875	2.125	22.2	53.9	0.040	#18
L2L	0.875	2.625	22.2	66.7	0.040	#18
L3C	0.875	3.125	22.2	79.4	0.040	#18
L3L	0.875	3.625	22.2	92.1	0.040	#18
N1C	1.000	1.125	25.4	28.6	0.040	#18
N1G	1.000	1.375	25.4	34.9	0.040	#18
N1L	1.000	1.625	25.4	41.3	0.040	#18
N2C	1.000	2.125	25.4	53.9	0.040	#18
N2L	1.000	2.625	25.4	66.7	0.040	#18
N3C	1.000	3.125	25.4	79.4	0.040	#18
N3L	1.000	3.625	25.4	92.1	0.040	#18

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the “Information”) in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements (“Cornell Dubilier”) has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cornell Dubilier:

<u>TCX142U050L2L</u>	<u>TCX501U050G2C</u>	<u>TCX111T100L1G</u>	<u>TCX123U015N3L</u>	<u>TCX162U015J1G1P</u>	<u>TCX151T100L1L</u>
<u>TCX282U050N3L</u>	<u>TCX422U040N3L</u>	<u>TCX251U050G1G</u>	<u>TCX101U075J1C</u>	<u>TCX102U015J1C</u>	<u>TCX102U040L1L</u>
<u>TCX103U010L3C</u>	<u>TCX112U075N3L</u>	<u>TCX122U025N1C</u>	<u>TCX142U030J2C</u>	<u>TCX142U040J2L</u>	<u>TCX151T150J2L</u>
<u>TCX171U050J1C</u>	<u>TCX182U025L1L</u>	<u>TCX192U050N2L</u>	<u>TCX212U015J1L</u>	<u>TCX212U040L2L</u>	<u>TCX242U025N1L</u>
<u>TCX270T150G1C</u>	<u>TCX272U030L2L</u>	<u>TCX302U030L3C</u>	<u>TCX311U030G1C</u>	<u>TCX361U040J1C</u>	<u>TCX371U050L1C</u>
<u>TCX372U025L2L</u>	<u>TCX561U075L2L</u>	<u>TCX622U015L2L</u>	<u>TCX650U075G1C</u>	<u>TCX711U050N1G</u>	<u>TCX722U025N3L</u>
<u>TCX741U075N2L</u>	<u>TCX822U015N2L</u>	<u>TCX951U050N1L</u>	<u>TCX471U030J1C</u>		