


## DC/DC Converter

## TDN 5WI Series, 5 Watt

- Ultra compact DIP package  
0.52 × 0.36 × 0.40 inch
- I/O-isolation 1'500 VDC
- Fully regulated outputs
- Operating temperature range  
–40°C to +75°C
- Short circuit protection
- Remote On/Off
- 3-year product warranty

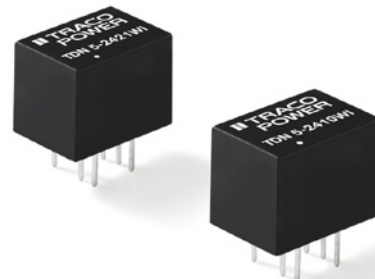

The TDN 5WI Series redefines the power density of high performance DC/DC converters. The cubical package of only 1.23 cm<sup>3</sup> encloses a sophisticated circuit which provides 5 Watt output power. They operate up to 50°C environment temperature at full load or up to 75°C with a 50% load de-rating. With 1500 VDC I/O-isolation voltage, external On/Off, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required.

| Models       |                                 |                |                     |                 |
|--------------|---------------------------------|----------------|---------------------|-----------------|
| Order code   | Input voltage                   | Output voltage | Output current max. | Efficiency typ. |
| TDN 5-0910WI | 4.5 – 12 VDC<br>(5 VDC nominal) | 3.3 VDC        | 1000 mA             | 76 %            |
| TDN 5-0911WI |                                 | 5.0 VDC        | 1000 mA             | 80 %            |
| TDN 5-0912WI |                                 | 12 VDC         | 420 mA              | 83 %            |
| TDN 5-0913WI |                                 | 15 VDC         | 333 mA              | 83 %            |
| TDN 5-0915WI |                                 | 24 VDC         | 210 mA              | 83 %            |
| TDN 5-0921WI |                                 | ± 5.0 VDC      | ±500 mA             | 80 %            |
| TDN 5-0922WI |                                 | ±12 VDC        | ±210 mA             | 83 %            |
| TDN 5-0923WI |                                 | ±15 VDC        | ±168 mA             | 83 %            |
| TDN 5-2410WI | 9 – 36 VDC<br>(24 VDC nominal)  | 3.3 VDC        | 1000 mA             | 76 %            |
| TDN 5-2411WI |                                 | 5.0 VDC        | 1000 mA             | 80 %            |
| TDN 5-2412WI |                                 | 12 VDC         | 420 mA              | 83 %            |
| TDN 5-2413WI |                                 | 15 VDC         | 333 mA              | 83 %            |
| TDN 5-2415WI |                                 | 24 VDC         | 210 mA              | 83 %            |
| TDN 5-2421WI |                                 | ± 5.0 VDC      | ±500 mA             | 80 %            |
| TDN 5-2422WI |                                 | ±12 VDC        | ±210 mA             | 83 %            |
| TDN 5-2423WI |                                 | ±15 VDC        | ±168 mA             | 84 %            |
| TDN 5-4810WI | 18 – 75 VDC<br>(48 VDC nominal) | 3.3 VDC        | 1000 mA             | 76 %            |
| TDN 5-4811WI |                                 | 5.0 VDC        | 1000 mA             | 81 %            |
| TDN 5-4812WI |                                 | 12 VDC         | 420 mA              | 83 %            |
| TDN 5-4813WI |                                 | 15 VDC         | 333 mA              | 83 %            |
| TDN 5-4815WI |                                 | 24 VDC         | 210 mA              | 83 %            |
| TDN 5-4821WI |                                 | ± 5.0 VDC      | ±500 mA             | 80 %            |
| TDN 5-4822WI |                                 | ±12 VDC        | ±210 mA             | 83 %            |
| TDN 5-4823WI |                                 | ±15 VDC        | ±168 mA             | 84 %            |

## Input Specifications

|                                                        |                                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Input current no load                                  | 5 Vin models: 80 mA typ.<br>24 Vin models: 30 mA typ.<br>48 Vin models: 15 mA typ.                                              |
| Surge voltage (1 sec. max.)                            | 5 Vin models: 15 V max.<br>24 Vin models: 50 V max.<br>48 Vin models: 100 V max.                                                |
| Reflected ripple current                               | 5 Vin models: 40 mA <sub>p-p</sub> typ.<br>24 Vin models: 20 mA <sub>p-p</sub> typ.<br>48 Vin models: 15 mA <sub>p-p</sub> typ. |
| Conducted noise                                        | EN 55022 class A or B with external components, <a href="#">see supporting documents</a>                                        |
| ESD (electrostatic discharge)                          | EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A                                                                        |
| Radiated immunity                                      | EN 61000-4-3, 10 V/m, perf. criteria A                                                                                          |
| Fast transient / surge (with external input capacitor) | EN 61000-4-4, ±2 kV, perf. criteria A<br>EN 61000-4-5, ±1 kV perf. criteria A                                                   |
| – external input capacitor                             | all models: Nippon chemi-con KY 220µF/100V                                                                                      |
| Conducted immunity                                     | EN 61000-4-6, 10 V <sub>rms</sub> , perf. criteria A                                                                            |

## Output Specifications

|                                           |                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage set accuracy                      | ±1 % max.                                                                                                                                                                                                                                                                                                                             |
| Voltage balance (dual output models)      | 1 % max.                                                                                                                                                                                                                                                                                                                              |
| Regulation                                | – Input variation<br>– Load variation 0 – 100 %<br>single output: 0.2 % max.<br>dual output: 1 % max.<br>cross regulation – dual output: 1 % max. (balanced load)<br>5 % max. (asymmetrical load 25 % / 100 %)                                                                                                                        |
| Temperature coefficient                   | ±0.02 %/K typ.                                                                                                                                                                                                                                                                                                                        |
| Ripple and noise (20 MHz Bandwidth)       | 75 mV <sub>p-p</sub> typ.                                                                                                                                                                                                                                                                                                             |
| Start up time                             | – Power ON: 10 ms max.<br>– Remote ON: 10 ms max.                                                                                                                                                                                                                                                                                     |
| Transient response (25% load step change) | 500 µs typ.                                                                                                                                                                                                                                                                                                                           |
| Short circuit protection                  | continuous, automatic recovery                                                                                                                                                                                                                                                                                                        |
| Capacitive load                           | – Single output<br>3.3 VDC models: 4400 µF max.<br>5.0 VDC models: 2200 µF max.<br>12 VDC models: 1220 µF max.<br>15 VDC models: 1000 µF max.<br>24 VDC models: 470 µF max.<br>– Dual output<br>±5.0 VDC models: 1000 µF max. (each output)<br>±12 VDC models: 680 µF max. (each output)<br>±15 VDC models: 440 µF max. (each output) |

## General Specifications

|                                                                      |                                                                                               |                                                 |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------|
| Temperature ranges                                                   | – Operating (convection cooling 20LFM, 0,1m/s)<br>– Case temperature<br>– Storage temperature | –40°C to +75°C<br>+95°C max.<br>–55°C to +125°C |
| Derating                                                             |                                                                                               | 1.8%/K above 50°C                               |
| Humidity (non condensing)                                            |                                                                                               | 95 % rel H max.                                 |
| Isolation voltage                                                    | – I/O isolation voltage (60 sec.)                                                             | 1'500 VDC                                       |
| Isolation capacitance                                                |                                                                                               | 50 pF max.                                      |
| Isolation resistance (@ 500 VDC)                                     |                                                                                               | >1 Gohm                                         |
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) |                                                                                               | 2'280'000 h                                     |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### General Specifications

|                           |                                                                                                                               |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Switching frequency       | 100 kHz min. Pulse frequency modulation.                                                                                      |
| Thermal shock & vibration | MIL-STD-810F                                                                                                                  |
| Remote On/Off             | – On: open circuit or high impedance<br>– Off: 2 – 4 mA current applied via 1kOhm resistor<br>– Off idle current: 2.5 mA max. |
| Safety standards          | UL 60950-1<br>IEC/EN 60950-1<br><a href="#">see supporting documents</a>                                                      |
| Environmental compliance  | – Reach <a href="#">see supporting documents</a><br>– RoHS RoHS directive 2011/65/EU                                          |


### Physical Specifications

|                       |                                     |
|-----------------------|-------------------------------------|
| Casing material       | non-conducting FR4 (UL 94V-0 rated) |
| Potting material      | silicone (UL 94V-0 rated)           |
| Pin material          | tinned copper                       |
| Package weight        | 2.7g (0.10oz)                       |
| Soldering temperature | max. 260°C / 6 sec                  |

**Supporting Documents:** [www.tracopower.com/overview/tdn5wi](http://www.tracopower.com/overview/tdn5wi)


### Outline Dimensions

DIP package:

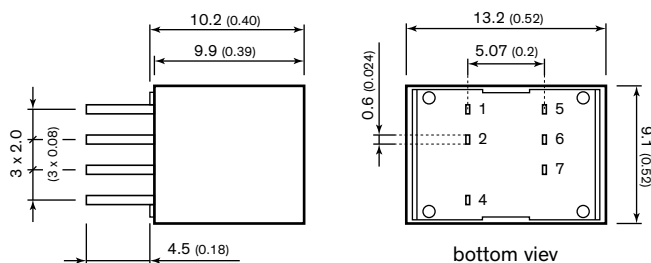

| Pin-Out |            |            |
|---------|------------|------------|
| Pin     | Single     | Dual       |
| 1       | +Vin (Vcc) | +Vin (Vcc) |
| 2       | –Vin (GND) | –Vin (GND) |
| 4       | On/Off     | On/Off     |
| 5       | no con.    | –Vout      |
| 6       | –Vout      | Common     |
| 7       | +Vout      | +Vout      |

SMD package (on demand):

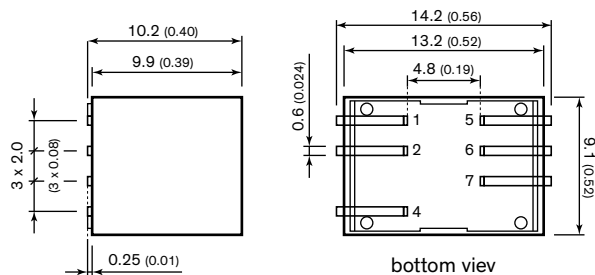

Dimensions in [mm], ( ) = Inch

Tolerances: x.xx ±0.5 (±0.02)

x.xxx ±0.25 (±0.01)

Pin pitch tolerances ±0.25 (±0.01)

pin dimension tolerance ±0.1 (±0.004)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TRACO Power:

[TDN 5-4810WI](#) [TDN 5-2411WI](#) [TDN 5-2415WI](#) [TDN 5-2422WI](#) [TDN 5-4811WI](#) [TDN 5-0911WI](#) [TDN 5-0912WI](#)  
[TDN 5-4812WI](#) [TDN 5-4823WI](#) [TDN 5-0910WI](#) [TDN 5-2410WI](#) [TDN 5-0922WI](#) [TDN 5-0915WI](#) [TDN 5-2412WI](#) [TDN](#)  
[5-2413WI](#) [TDN 5-4822WI](#) [TDN 5-0921WI](#) [TDN 5-4813WI](#) [TDN 5-0923WI](#) [TDN 5-0913WI](#) [TDN 5-2421WI](#) [TDN 5-](#)  
[4821WI](#) [TDN 5-2423WI](#) [TDN 5-4815WI](#)