




TOP VIEW

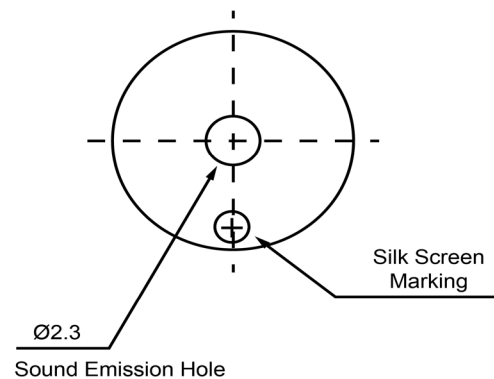

SIDE VIEW

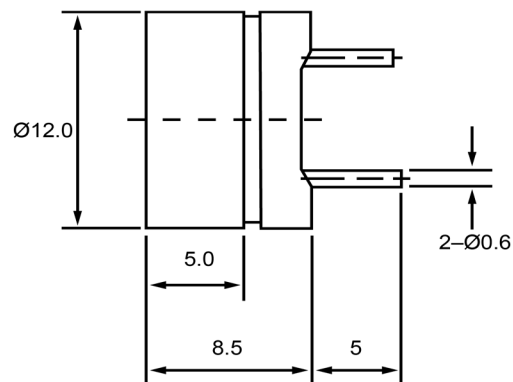

BOTTOM VIEW

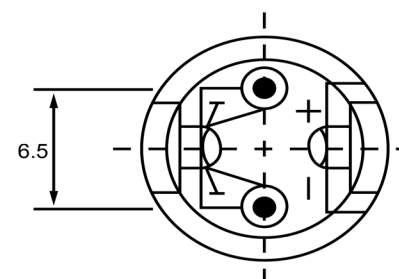

Specifications

Description	Value	Unit
Technology	Electro-Mechanical	
Resonant Frequency	2,048	(Hz)
Rated Voltage	1.5	(V)
SPL @ 10cm	80	(dBA)
Coil Resistance	42	(ohm)
Mount Type	Thru Hole	
Voltage Range	1 ~ 5	(V)
Max Rated Current	15	(mA)
Housing Material	NORYL	
Operating Temperature	-20 ~ +60	°C
Storage Temperature	-20 ~ +60	°C
Weight	2	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Electro-Mechanical Transducer

Revision History

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

TE122001-4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[TE122001-4](#)