

# MODEL TL-4902



International size reference: 1/2AA, ER14252

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



|                                          |                  |
|------------------------------------------|------------------|
| ■ Nominal capacity @ 0.5 mA, to 2 V      | 1.2 Ah           |
| ■ Rated voltage                          | 3.6 V            |
| ■ Maximum recommended continuous current | 20 mA            |
| ■ Maximum 1 sec. pulse capability        | 50 mA            |
| ■ Weight                                 | 9.6 g (0.338 oz) |
| ■ Volume                                 | 4 cc             |
| ■ Operating temperature range            | -55 °C to +85 °C |
| ■ U.L. Component Recognition, MH 12193   |                  |

***TADIRAN  
LITHIUM  
BATTERIES***

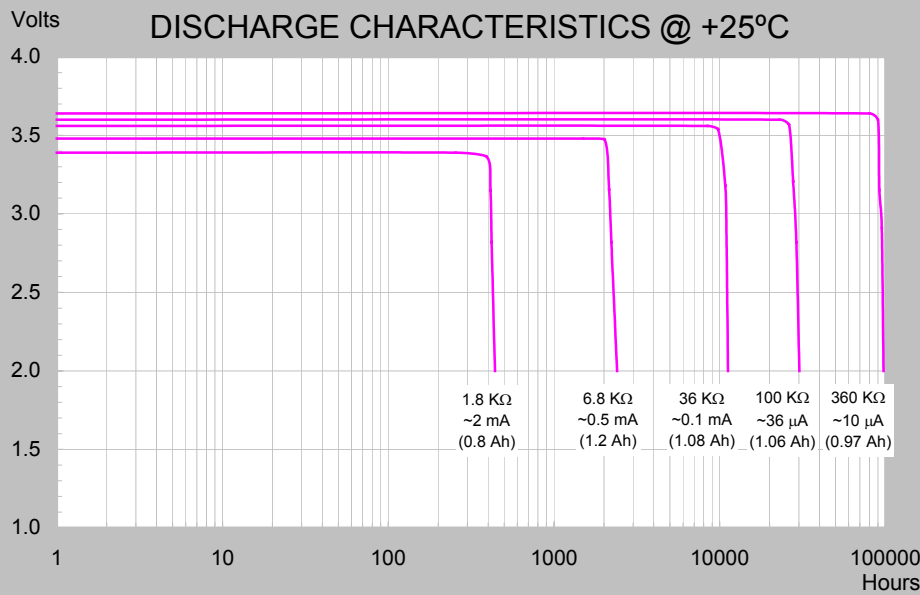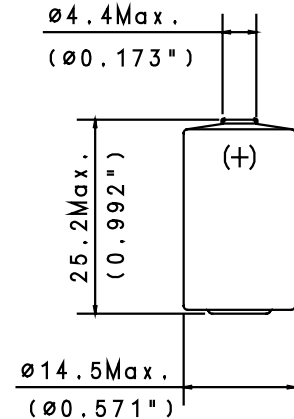

### AVAILABLE TERMINATIONS

|                            |               |
|----------------------------|---------------|
| SUFFIX- /S STANDARD        | 15-4902-21000 |
| SUFFIX- /T SOLDER TABS     | 15-4902-31000 |
| SUFFIX- /P AXIAL PINS      | 15-4902-41000 |
| SUFFIX- /PT2 RADIAL PINS   | 15-4902-36000 |
| SUFFIX- /TP POLARIZED TABS | 15-4902-52000 |
| SUFFIX- /PT POLARIZED TABS | 15-4902-53000 |

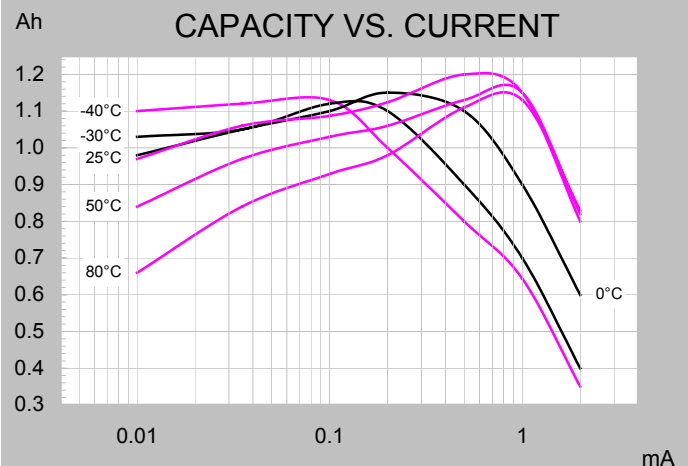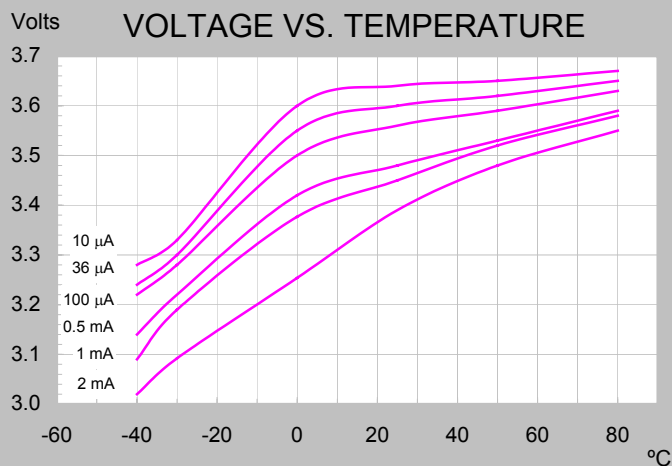

***XOL - Extended Operating Life***

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06