

MODEL TL-5276/W



For Utility Metering Memory Back-up Applications

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 1 mA, to 2V	1.0 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	50 mA
■ Maximum pulse current capability	100 mA
■ Enclosure	Lexan 143 UV stable
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition, MH 12193	

TADIRAN LITHIUM BATTERIES

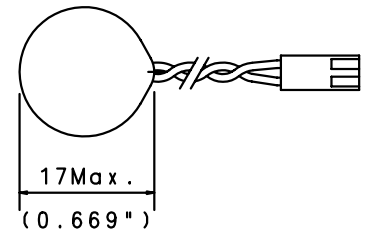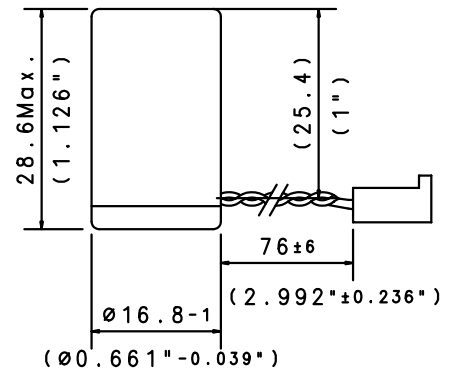

ADDITIONAL INFORMATION

CONNECTOR TYPE METHOD IDC 1308-102-426
CATALOUGE NO. 15-5276-30000

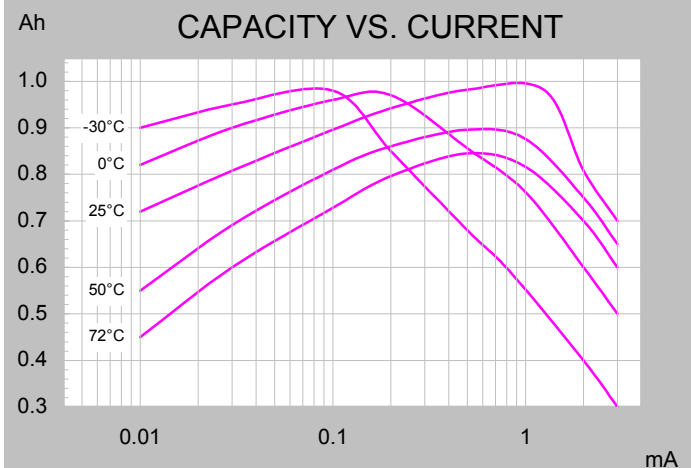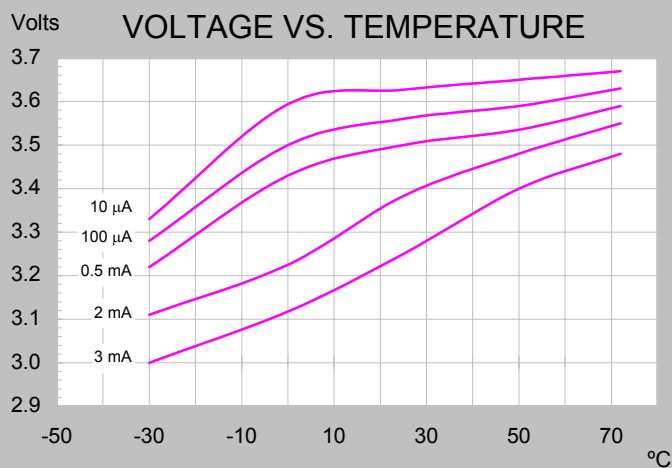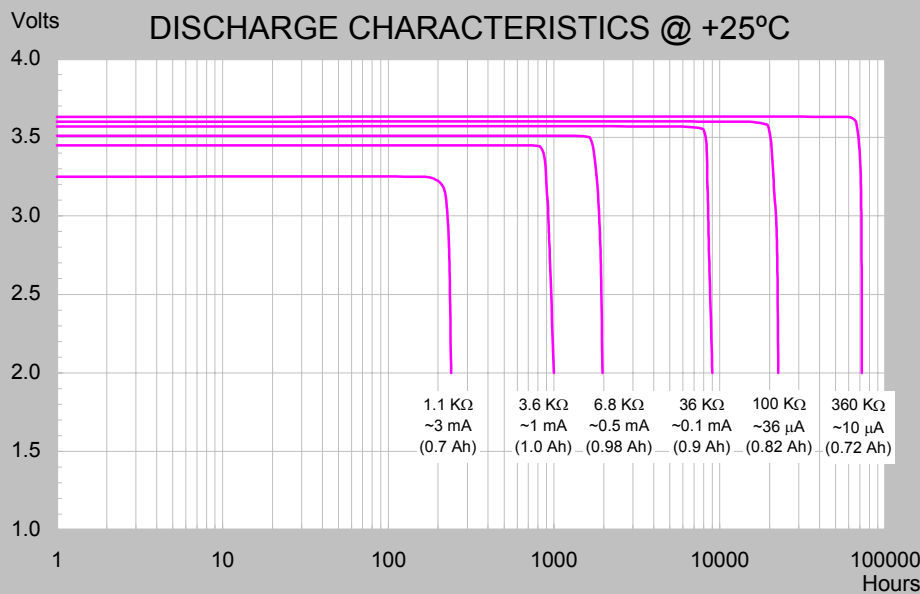

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. C 10/03