

[<-- back](#)

MODEL TL-5955

International size reference : 2/3AA, ER14335




TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


Nominal capacity @ 1.3 mA TO 2V	1.65Ah
Rated voltage	3.6V
Maximum continuous current	75mA
Maximum pulse current capability	150mA
Rated 1 sec. pulse capability (to 3V)	35mA
Weight	11.8g (0.416 oz.)
Operating temperature range	-55°C to +85°C

U.L. Component recognition MH 12193


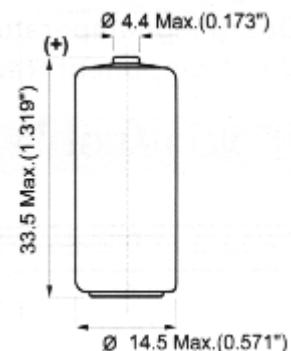


AVAILABLE TERMINATIONS

SUFFIX- /S	STANDARD
SUFFIX- /P	AXIAL PINS
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS

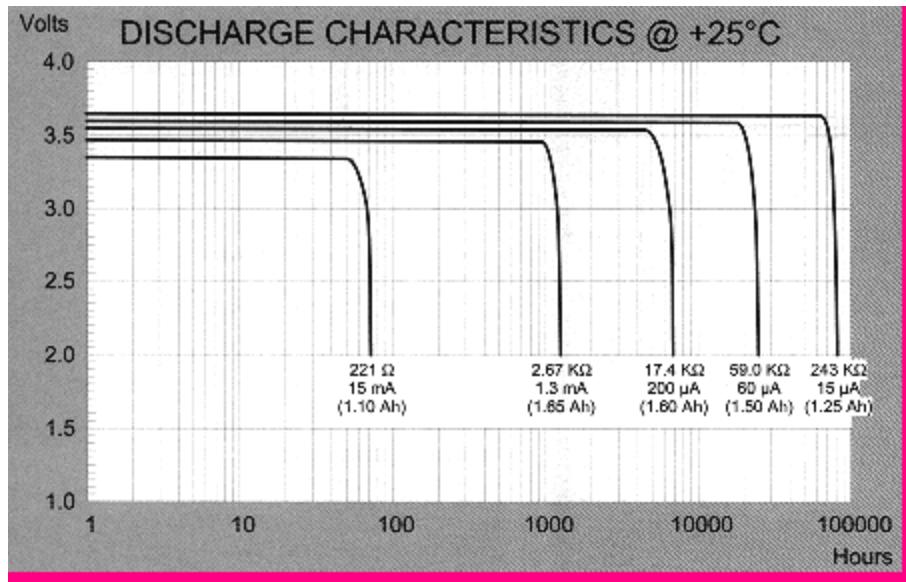

SUFFIX- /PT/TP||POLARIZED TABS

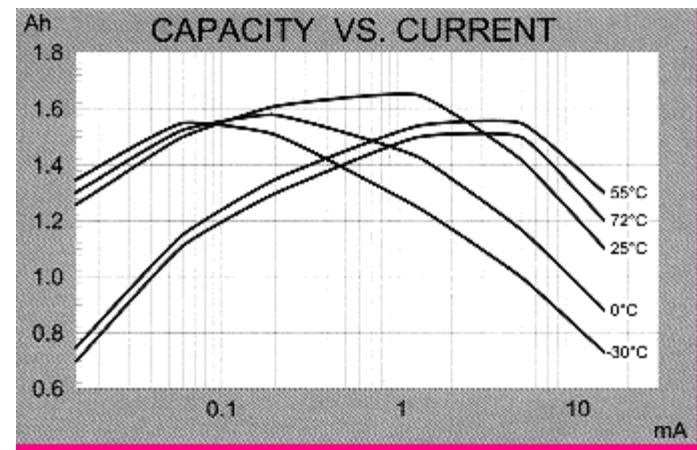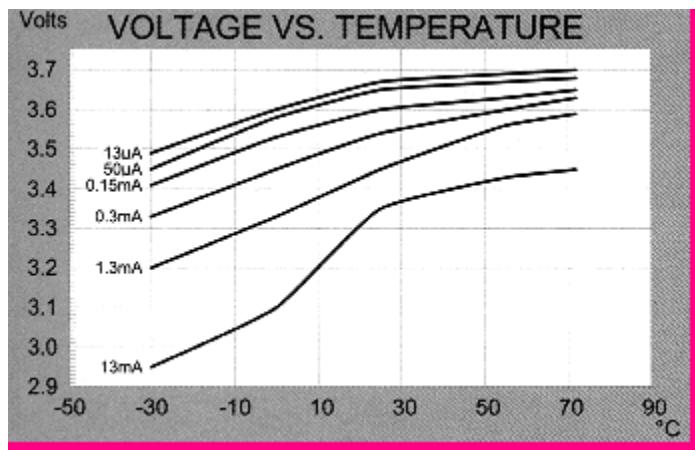

LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

