



## High Intensity LED, $\varnothing$ 5 mm Clear Package



19223



19224

### FEATURES

- Exceptional brightness ( $I_{Vtyp} = 2500$  mcd at  $I_F = 20$  mA)
- Narrow viewing angle ( $\varphi = \pm 4^\circ$ )
- Low forward voltage
- 5 mm (T-1 $\frac{3}{4}$ ") clear package
- Very high intensity even at low drive currents
- Deep red color
- Categorized for luminous intensity
- Outstanding material efficiency
- Lead (Pb)-free device
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### DESCRIPTION

This LED contains the double heterojunction (DH) GaAlAs on GaAs technology.

This deep red LED can be utilized over a wide range of drive current. It can be DC or pulse driven to achieve desired light output.

A clear 5 mm package is used to provide an extremely high light intensity of more than 2000 mcd at a very narrow viewing angle.

### APPLICATIONS

- Bright ambient lighting conditions
- Battery powered equipment
- Indoor and outdoor information displays
- Portable equipment
- Telecommunication indicators
- General use

### PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: 5 mm
- Product series: standard
- Angle of half intensity:  $\pm 4^\circ$

### PARTS TABLE

| PART          | COLOR, LUMINOUS INTENSITY | TECHNOLOGY     |
|---------------|---------------------------|----------------|
| TLDR5800/6800 | Red, $I_V \geq 1000$ mcd  | GaAlAs on GaAs |

### ABSOLUTE MAXIMUM RATINGS<sup>1)</sup> TLDR5800/6800

| PARAMETER                     | TEST CONDITION      | SYMBOL    | VALUE         | UNIT       |
|-------------------------------|---------------------|-----------|---------------|------------|
| Reverse voltage <sup>2)</sup> |                     | $V_R$     | 6             | V          |
| DC Forward current            |                     | $I_F$     | 50            | mA         |
| Surge forward current         | $t_p \leq 10 \mu s$ | $I_{FSM}$ | 1             | A          |
| Power dissipation             |                     | $P_V$     | 100           | mW         |
| Junction temperature          |                     | $T_J$     | 100           | $^\circ C$ |
| Operating temperature range   |                     | $T_{amb}$ | - 40 to + 100 | $^\circ C$ |

## ABSOLUTE MAXIMUM RATINGS<sup>1)</sup> TLDR5800/6800

| PARAMETER                           | TEST CONDITION               | SYMBOL     | VALUE         | UNIT |
|-------------------------------------|------------------------------|------------|---------------|------|
| Storage temperature range           |                              | $T_{stg}$  | - 55 to + 100 | °C   |
| Soldering temperature               | $t \leq 5$ s, 2 mm from body | $T_{sd}$   | 260           | °C   |
| Thermal resistance junction/ambient |                              | $R_{thJA}$ | 350           | K/W  |

Note:

<sup>1)</sup>  $T_{amb} = 25$  °C, unless otherwise specified

<sup>2)</sup> Driving the LED in reverse direction is suitable for a short term application

## OPTICAL AND ELECTRICAL CHARACTERISTICS<sup>1)</sup> TLDR5800/6800, RED

| PARAMETER               | TEST CONDITION          | SYMBOL      | MIN  | TYP.    | MAX | UNIT    |
|-------------------------|-------------------------|-------------|------|---------|-----|---------|
| Luminous intensity      | $I_F = 20$ mA           | $I_V$       | 1000 | 2500    |     | mcd     |
| Dominant wavelength     | $I_F = 20$ mA           | $\lambda_d$ |      | 648     |     | nm      |
| Peak wavelength         | $I_F = 20$ mA           | $\lambda_p$ |      | 650     |     | nm      |
| Angle of half intensity | $I_F = 20$ mA           | $\phi$      |      | $\pm 4$ |     | deg     |
| Forward voltage         | $I_F = 20$ mA           | $V_F$       |      | 1.8     | 2.2 | V       |
| Reverse current         | $V_R = 6$ V             | $I_R$       |      |         | 10  | $\mu$ A |
| Junction capacitance    | $V_R = 0$ , $f = 1$ MHz | $C_j$       |      | 50      |     | pF      |

Note:

<sup>1)</sup>  $T_{amb} = 25$  °C, unless otherwise specified

## LUMINOUS INTENSITY CLASSIFICATION

| GROUP    | LUMINOUS INTENSITY (MCD) |       |
|----------|--------------------------|-------|
| STANDARD | MIN                      | MAX   |
| EE       | 1000                     | 2000  |
| FF       | 1350                     | 2700  |
| GG       | 1800                     | 3600  |
| HH       | 2400                     | 4800  |
| II       | 3200                     | 6400  |
| KK       | 4300                     | 8600  |
| LL       | 5750                     | 11500 |
| MM       | 7500                     | 15000 |
| NN       | 10000                    | 20000 |

Note:

Luminous intensity is tested at a current pulse duration of 25 ms and an accuracy of  $\pm 11$  %.

The above type numbers represent the order groups which include only a few brightness groups. Only one group will be shipped on each bag (there will be no mixing of two groups in each bag).

In order to ensure availability, single brightness groups will not be orderable.

In a similar manner for colors where wavelength groups are measured and binned, single wavelength groups will be shipped on any one bag.

In order to ensure availability, single wavelength groups will not be orderable.

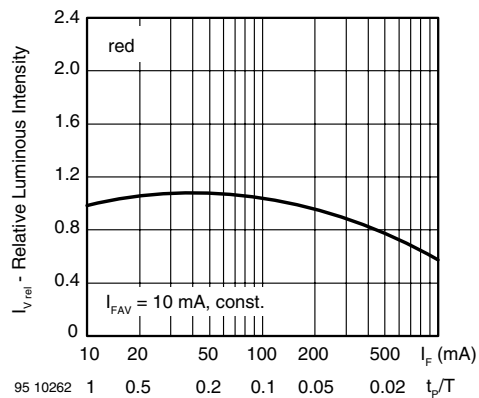


Figure 7. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle


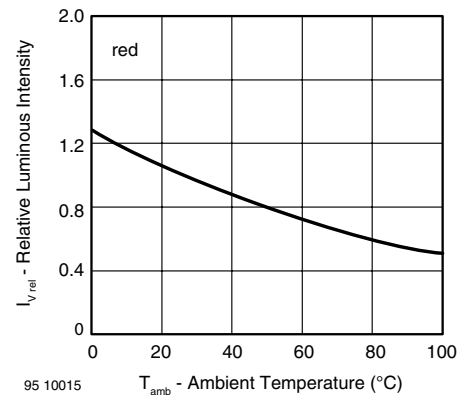



Figure 8. Rel. Luminous Intensity vs. Ambient Temperature

## PACKAGE DIMENSIONS: TLDR5800

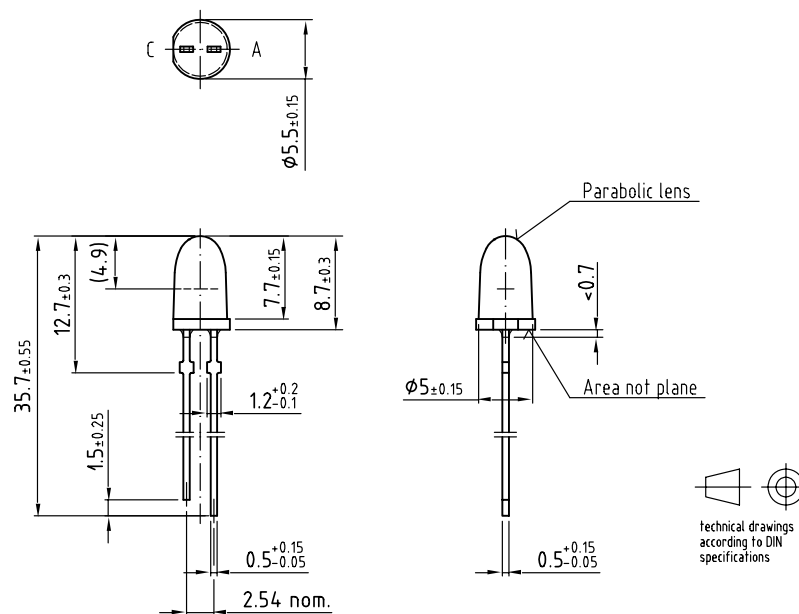

Drawing-No.: 6.544-5310.01-4  
Issue: 2; 04.07.03  
95 11476

## PACKAGE DIMENSIONS: TLDR6800

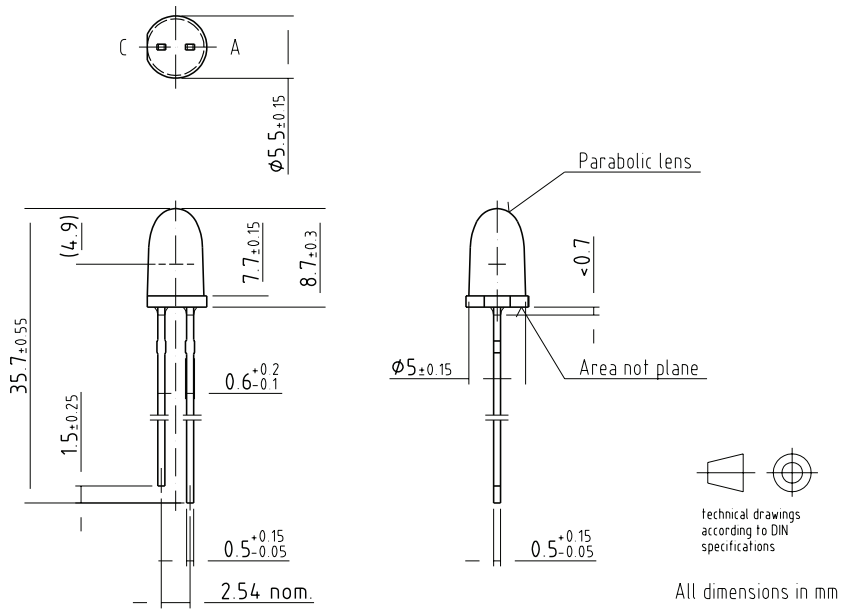

Drawing-No.: 6.544-5311.01-4

Issue: 2; 04.07.03

20243