

TOSHIBA PHOTOCOUPLER GaAs IRED & PHOTO-THYRISTOR

TLP741J

OFFICE MACHINE

HOUSEHOLD USE EQUIPMENT

SOLID STATE RELAY

SWITCHING POWER SUPPLY

The TOSHIBA TLP741J consists of a photo-thyristor optically coupled to a gallium arsenide infrared emitting diode in a six lead plastic DIP package.

- Peak Off-State Voltage : 600V (Min.)
- Trigger LED Current : 10mA (Max.)
- On-State Current : 150mA (Max.)
- UL Recognized : UL1577, File No. E67349
- BSI Approved : BS EN60065:1994
Certificate No. 6617
BS EN60950:1992
Certificate No. 7366


Isolation Voltage : 4000V_{rms} (Min.)

- Option (D4) type
VDE Approved : DIN VDE0884/08, 87
Certificate No. 65640
Maximum Operating Insulation Voltage : 630V_{PK}
Highest Permissible Over Voltage : 6000V_{PK}

(Note) When a VDE0884 approved type is needed,
please designate the "Option (D4)"


	7.62mm pitch standard type	10.16mm pitch (LF2) type
● Creepage Distance	: 7.0mm (Min.)	8.0mm (Min.)
Clearance	: 7.0mm (Min.)	8.0mm (Min.)
Insulation Thickness	: 0.5mm (Min.)	0.5mm (Min.)

Unit in mm

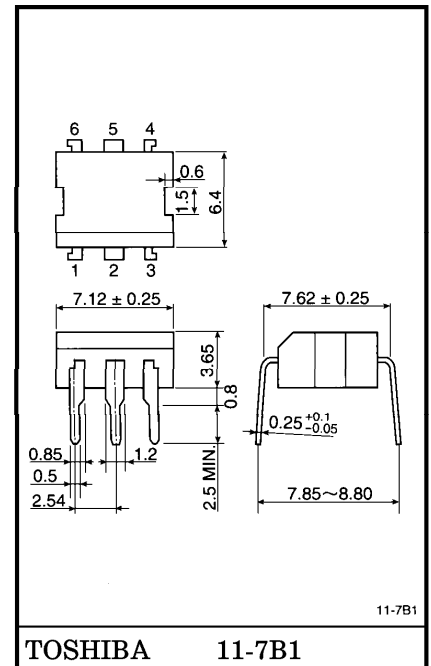

Weight : 0.35g

PIN CONFIGURATION (TOP VIEW)



- 1 : ANODE
- 2 : CATHODE
- 3 : N.C.
- 4 : CATHODE
- 5 : ANODE
- 6 : GATE

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I _F	60	mA
	Forward Current Derating (Ta ≥ 39°C)	ΔI _F / °C	−0.7	mA / °C
	Peak Forward Current (100μs pulse, 100pps)	I _{FP}	1	A
	Power Dissipation	P _D	100	mW
	Power Dissipation Derating (Ta ≥ 25°C)	ΔP _D / °C	−1.0	mW / °C
	Reverse Voltage	V _R	5	V
	Junction Temperature	T _j	125	°C
DETECTOR	Peak Forward Voltage (R _{GK} = 27kΩ)	V _{DRM}	600	V
	Peak Reverse Voltage (R _{GK} = 27kΩ)	V _{RRM}	600	V
	On-State Current	I _T (RMS)	150	mA
	On-State Current Derating (Ta ≥ 25°C)	ΔI _T / °C	−2.0	mA / °C
	Peak On-State Current (100μs pulse, 120pps)	I _{TP}	3	A
	Peak One Cycle Surge Current	I _{TSM}	2	A
	Peak Reverse Gate Voltage	V _{GM}	5	V
	Power Dissipation	P _D	150	mW
	Power Dissipation Derating (Ta ≥ 25°C)	ΔP _D / °C	−2.0	mW / °C
	Junction Temperature	T _j	100	°C
Storage Temperature Range		T _{stg}	−55~125	°C
Operating Temperature Range		T _{opr}	−55~100	°C
Lead Soldering Temperature (10s)		T _{sol}	260	°C
Total Package Power Dissipation		P _T	250	mW
Total Package Power Dissipation Derating (Ta ≥ 25°C)		ΔP _T / °C	−3.3	mW / °C
Isolation Voltage (AC, 1min., R.H. ≤ 60%)		BV _S	4000	V _{rms}

RECOMMENDED OPERATING CONDITIONS







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{AC}	—	—	240	V _{ac}
Forward Current	I _F	15	20	25	mA
Operating Temperature	T _{opr}	−25	—	85	°C
Gate to Cathode Resistance	R _{GK}	—	10	27	kΩ
Gate to Cathode Capacity	C _{GK}	—	0.01	0.1	μF



INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$		1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R = 5\text{V}$		—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$		—	30	—	pF
DETECTOR	Off-State Current	I_{DRM}	$V_{AK} = 600\text{V}$ $R_{GK} = 27\text{k}\Omega$	Ta = 25°C	—	10	5000	nA
				Ta = 85°C	—	1	150	μA
	Reverse Current	I_{RRM}	$V_{KA} = 600\text{V}$ $R_{GK} = 27\text{k}\Omega$	Ta = 25°C	—	10	5000	nA
				Ta = 85°C	—	1	150	μA
	On-State Voltage	V_{TM}	$I_{TM} = 100\text{mA}$		—	0.9	1.3	V
	Holding Current	I_H	$R_{GK} = 27\text{k}\Omega$		—	0.2	—	mA
	Off-State dv/dt	dv/dt	$V_D = 420\text{V}, R_{GK} = 27\text{k}\Omega$		—	10	—	V / μs
	Capacitance	C_j	$V = 0, f = 1\text{MHz}$	Anode to Gate	—	20	—	pF
				Gate to Cathode	—	350	—	

COUPLED CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	I_{FT}	$V_{AK} = 6\text{V}, R_{GK} = 27\text{k}\Omega$	—	5	10	mA
Turn-on Time	t_{ON}	$I_F = 30\text{mA}, V_{AA} = 50\text{V}$ $R_{GK} = 27\text{k}\Omega$	—	10	—	μs
Coupled dv/dt	dv/dt	$V_S = 500\text{V}, R_{GK} = 27\text{k}\Omega$	500	—	—	V / μs
Capacitance (Input to Output)	C_S	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S = 500\text{V}$	1×10^{12}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	4000	—	—	V_{rms}
		AC, 1 second, in oil	—	10000	—	
		DC, 1 minute, in oil	—	10000	—	V_{dc}

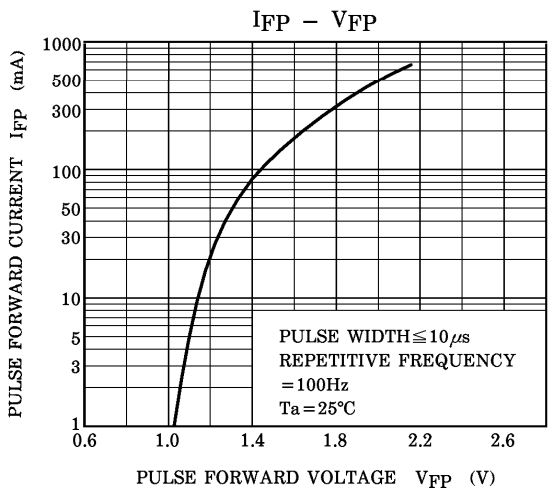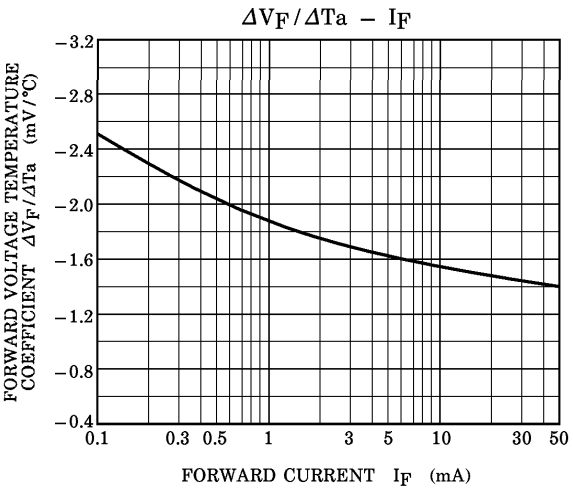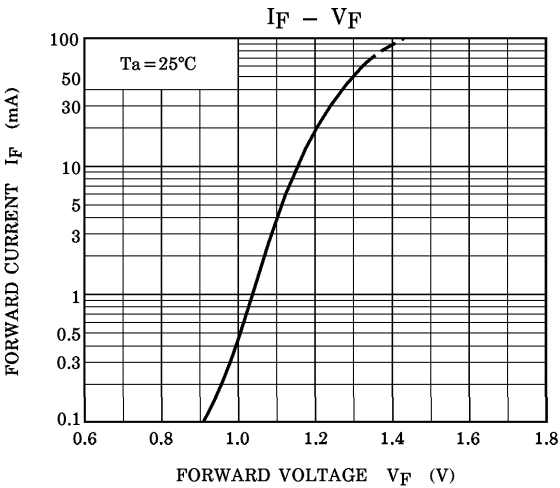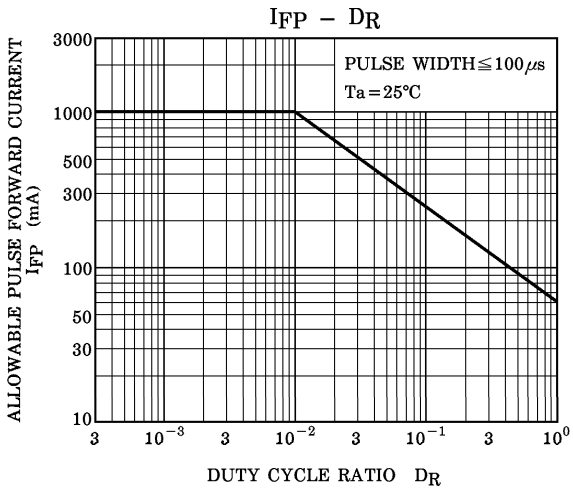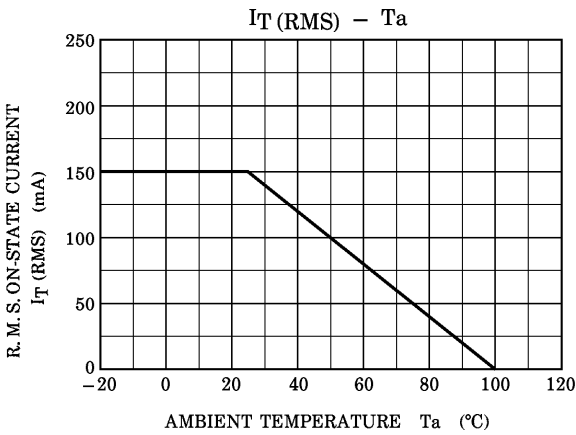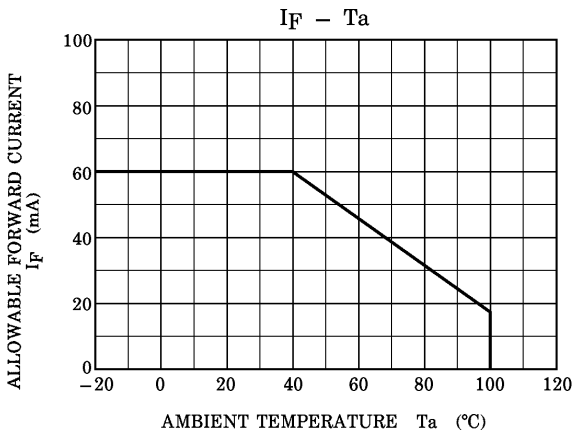

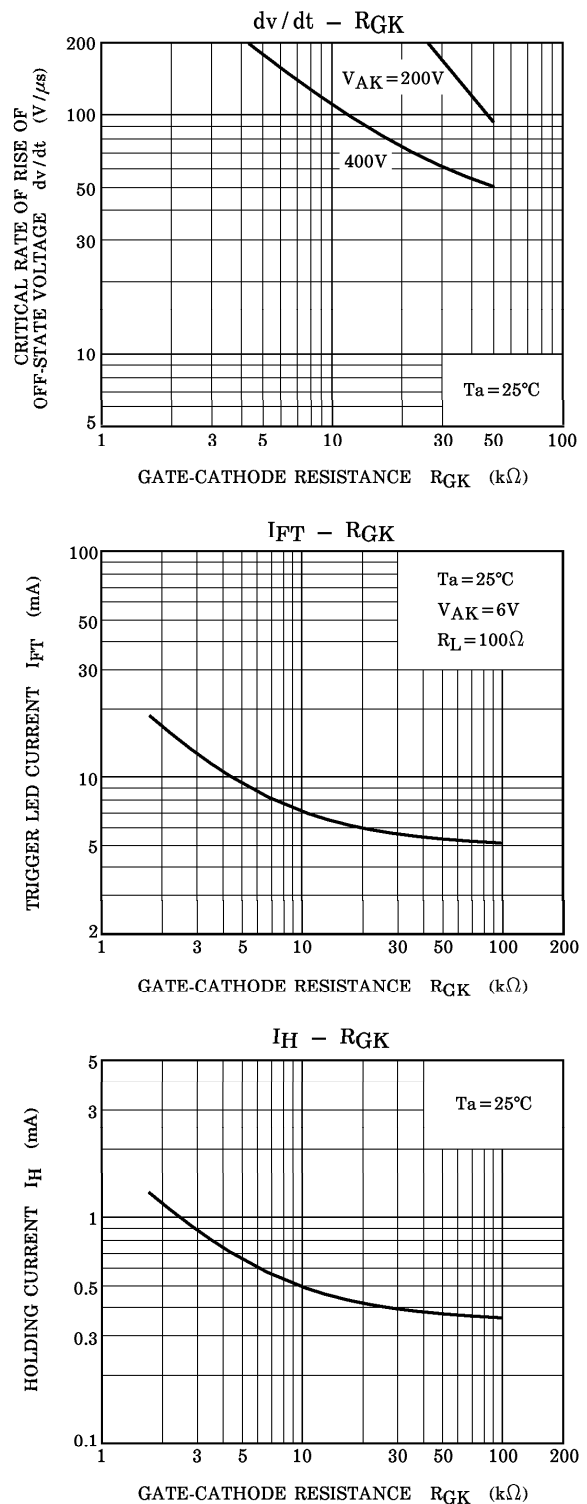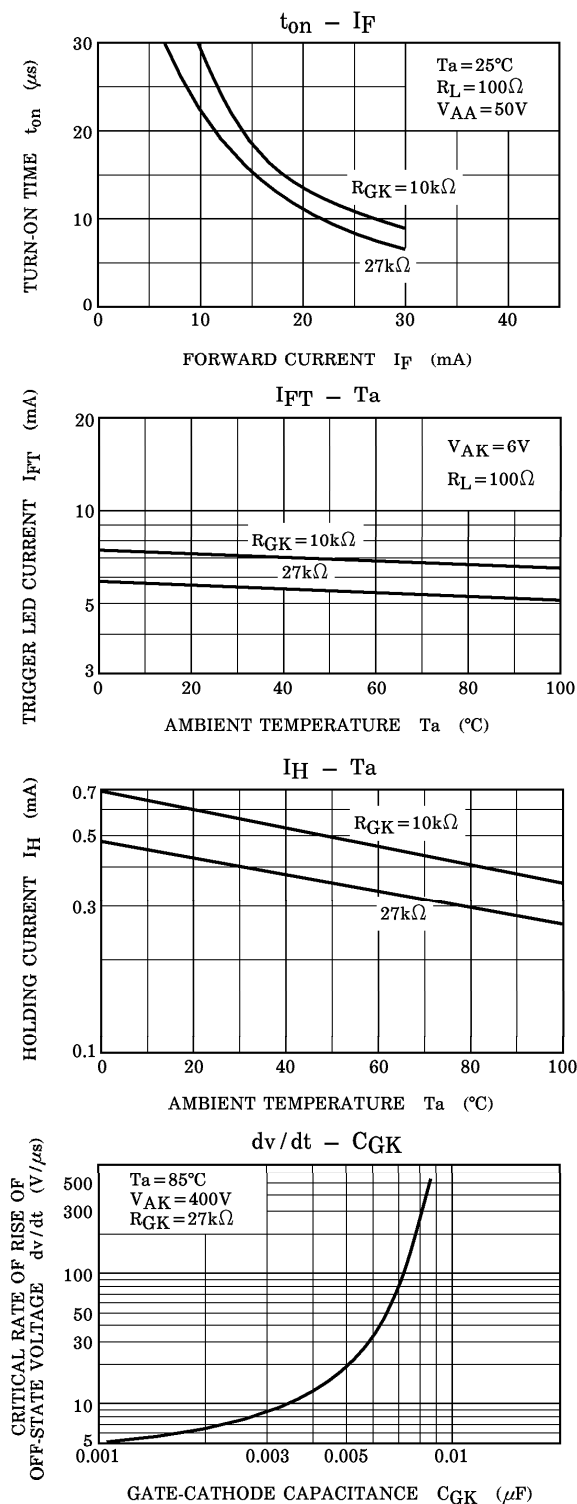

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com