
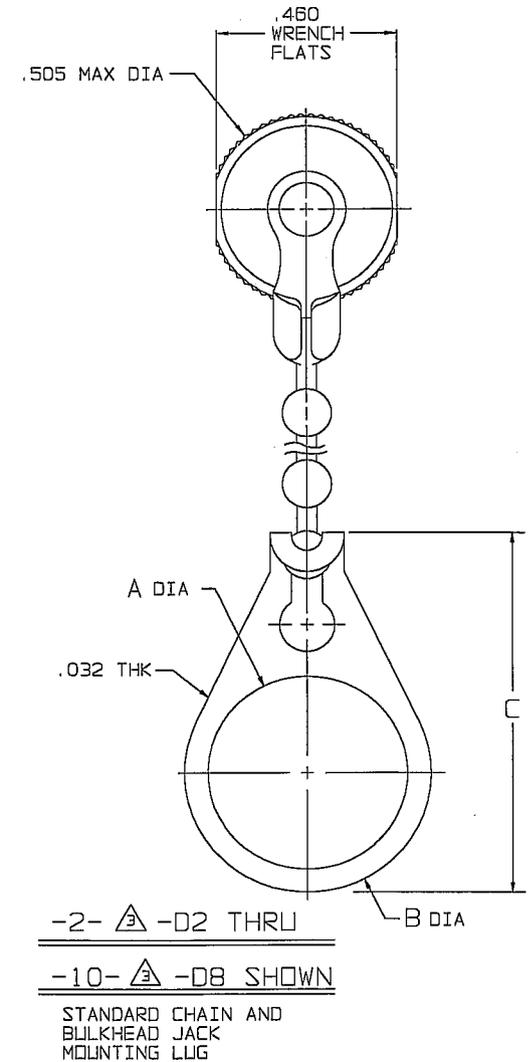


TABLE 1	
DASH NO	DESCRIPTION
-1	TERM (NO CHAIN)
-2	TERM WITH 2.5 BRASS CHAIN
-4	TERM WITH 3.0 BRASS CHAIN
-6	TERM WITH 6.0 BRASS CHAIN
-8	TERM WITH 4.0 BRASS CHAIN
-10	TERM WITH 10.0 BRASS CHAIN

TABLE 2			
DASH NO	"A" DIA	"B" DIA	"C" DIM
-02	.630	.750	1.066
-03	.505	.625	.941
-05	.380	.500	.816
-08	.610	.750	1.066

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS INC.

REVISIONS		5-0003	SH 1
REV	DESCRIPTION	DATE	APPROVED
E	REVISED PER ECD 15530	7/19/04	WJ

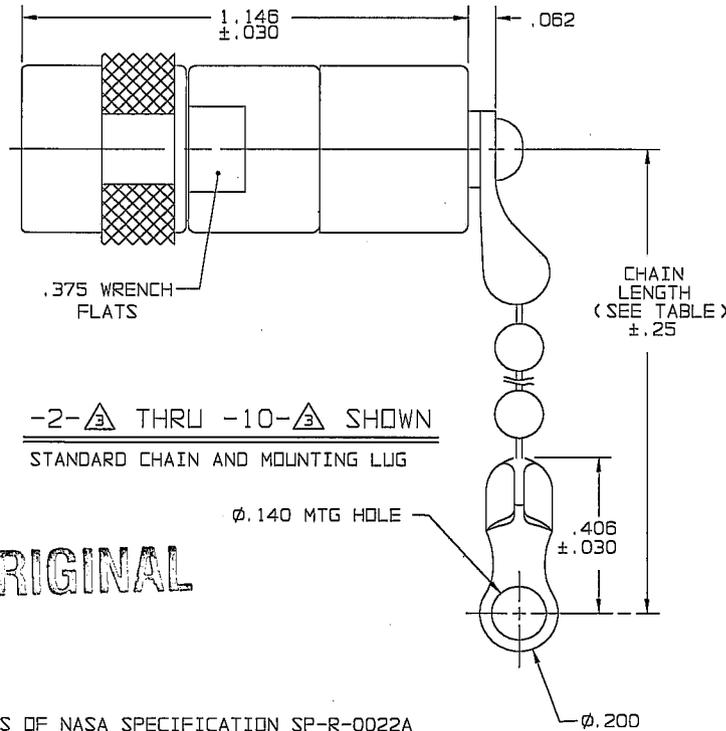


RED INDICATES ORIGINAL

7. ALL MATERIALS MEET THE OUTGASSING REQUIREMENTS OF NASA SPECIFICATION SP-R-0022A AND TEI'S SPECIFICATION TT-09

△ IF SAFETY WIRE TYPE REQ'D ADD SUFFIX "S" TO THE BASIC PART NO (i.e. 5-0003S)

5. EXAMPLE OF COMPLETE PART NO:

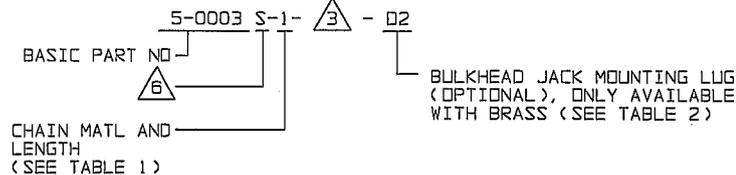


4. PIN CONTACT TTM SERIES CONCENTRIC TWINAX/TRIAX THREADED SUBMINIATURE TERMINATED CABLE PLUG SPACE RATED

△ RESISTANCE VALUE IN OHMS (2W, 1%) "S" = SHORTED TO INNER SHIELD (NO RESISTOR)

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

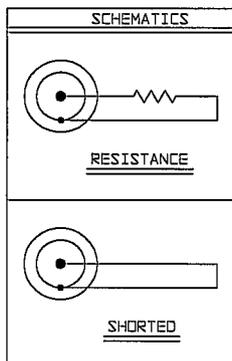

NEXT ASSY

INTERPRET DRAWING PER MIL-STD-100 DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED		TOL: UNLESS SPECIFIED .XX .XXX ± .005 .XXXX			TITLE: TNTM1/TNTMS1 2 WATT RESISTOR SPACE RATED
DRAWN H.M. 7-15-04 CHECKED WJ 7/19/04 QUALITY WJ 7/19/04 MANUFACTURE WJ 7/19/04 APPROVED WJ 7/19/04	DATE 7-15-04 DATE 7/19/04 DATE 7/19/04	MATERIAL: FINISH: 	SIZE A CAGE CODE 14949 DRAWING NO. 5-0003		
DO NOT SCALE DWG		SCALE 2/1	DATE: 7-17-03	SHEET 1C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[TNTMS1-6-0](#)