

PAIR	CONSIST OF :
BTO-26732-D55	(2) BTO-26740-D55


BOTH MICROPHONES OF THE PAIR ARE TESTED TO BTO-26740-D55 SHT 2.1 AND THEN MATCHED TO THE OTHER MICROPHONES USING THE SPECIFICATION AND CONDITIONS BELOW:

FREQUENCY	TEST TYPE	RANGE OF DEVIATION BETWEEN MICROPHONES	UNITS
1 kHz	SENSITIVITY	2.0 MAX.	dB
200 Hz	PHASE	1.5 MAX.	DEGREES
5000 Hz	PHASE	5.0 MAX.	DEGREES
7000 Hz	SENSITIVITY	1.0 MAX.	dB

NOTES:

- DC SUPPLY VOLTAGE 0.9 VOLTS.
- SENSITIVITY AND PHASE VALUES INDICATED ARE VALID AT 50% RH.

3 >>> SHOWS MICROPHONE WITH GREATER RESPONSE PHASE VALUE AT 200 Hz.

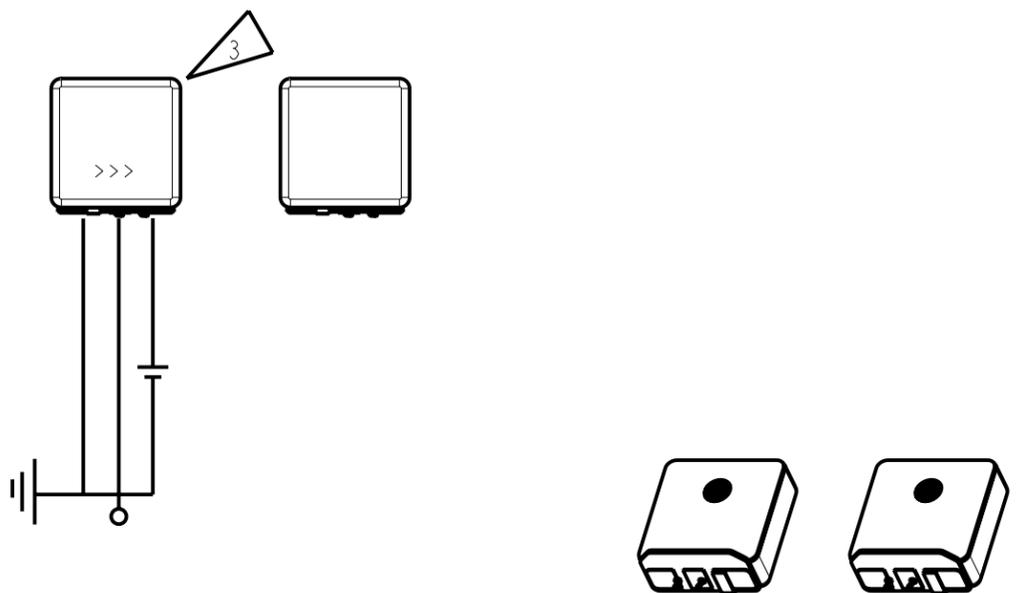

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	M10101428	4-23-07	Released	C
B	M10101231	9-14-06		
A	M10100999P	1-17-06		

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **MICROPHONE PAIR** **BTO-26732-D55**  
PERFORMANCE SPECIFICATION **SHT 2.1**

DR. BY	DATE
MMM	1-17-06
CK. BY	DATE
GJP	1-19-06
APP. BY	DATE
GJP	1-19-06

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Knowles:

[BTO-26732-D55](#) [TO38-31020-B21](#) [TO-24611-P16](#) [BTO-26740-D55](#) [TO-30078-000](#) [TO38-31019-B21](#) [TO38-30885-B21](#) [TO-30043-B63](#) [TO-31588-D31](#) [TO-24609-B26](#) [TO-30186-S13](#) [TO-30299-D31](#) [TO-30453-000](#) [TO-30317-000](#) [BTO-26738-D48](#) [TO-31076-000](#) [TO-30241-000](#) [TO-30186-C56](#) [TO38-30702-B20](#) [TO-30790-S13](#) [TO-24611-D58](#) [TO-24611-C56](#) [TO-30187-S13](#) [TO-30453-P16](#) [TO38-31549-B21](#) [TO-24611-D60](#) [TO-30994-000](#) [TO38-31638-B21](#) [TO38-31548-B20](#) [TO-24614-C56](#) [TO-30078-P117](#) [TO-30079-P121](#)