

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
- 1.1 FREQUENCY RANGE: DC to 11.0 GHz

1.2 VSWR: 1.20:1 MAX.

1.3 IMPEDANCE: 50 OHMS

1.4 INPUT POWER:

5 WATTS AVERAGE AT +40°C DERATED LINEARLY TO 1.0 WATT AT +125°C

5 KILWATT PEAK (5 μSECOND PULSE WIDTH)

1.5 OPERATING TEMPERATURE RANGE:


−54°C to +125°C
- 2.0 MARKING
- 2.1 MARK UNIT AS SHOWN.

(REF.: INK−02871−27−02)

2.2 STAMP END WITH "CAUTION HOT" STAMP

(REF.: INK−04494−27−01)

 NOTE: USE RED INK FOR THIS STAMP ONLY.
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

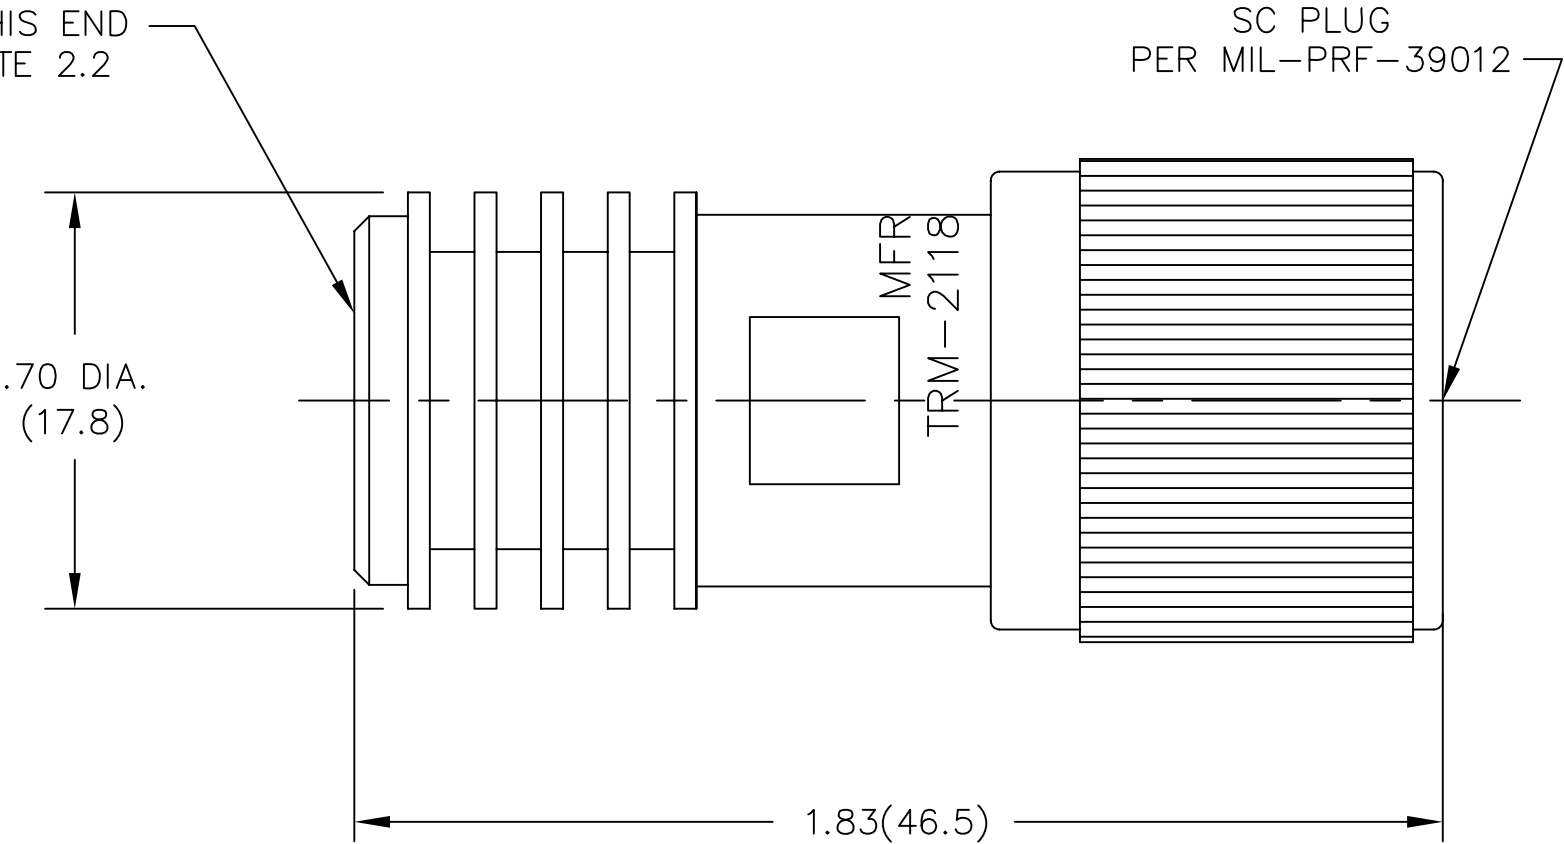

MODEL NUMBER	REV.
TRM−2118−MO−SCO−07	E1

DWG NO. WAS: 03152−01−00

REV.	DESCRIPTION	DATE
−	RELEASED	10/10/79
A	ECR 1893	12/13/82
B	ECR 6545	7/6/89
C	ECR 7672	9/25/90
C1	REVISE SEQ. CODE	5/10/91
C2	FINISH CHANGE −02	5/30/91
D	ECN 12731	6/15/93
E	ECN 13716	6/23/94
E1	ADDED TITLEBLOCK	11/3/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. 34078		MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION – SC PLUG		
DRAWN/DATE A.BEATTY 6/15/93		ENG./DATE G.KOZAK 6/21/93		DRAWING NUMBER TRM-2118-MO-SCO-07	
CHECKED/DATE M.HOLLMAN 6/17/93		APPROVED/DATE			
		SCALE: 3=1		SHEET 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[TRM-2118-M0-SC0-07](#)