


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS
 - 1.1 FREQUENCY RANGE: DC to 18.0 GHz.
 - 1.2 IMPEDANCE: 50 ±2 OHMS
 - 1.3 VSWR (MAX):
 - DC to 8.0 GHz: 1.20:1
 - 8.0 to 12.4 GHz: 1.30:1
 - 12.4 to 18.0 GHz: 1.35:1
 - VSWR POWER COEFFICIENT: 0.005/WATT
 - 1.4 RESISTOR TEMP. COEFFICIENT: 500 PPM/°C
 - 1.5 AMBIENT OPERATING TEMP.: -54°C to +125°C
 - 1.6 STORAGE TEMP. RANGE: -62°C to +125°C
 - 1,7 MAXIMUM INPUT POWER: 10 WATTS AVG.
 - MAXIMUM RATED AVG. POWER AT +25°C
 - AMBIENT TEMP. DERATED LINEARLY TO 0 WATTS AT +125°C.
 - 1.8 MAXIMUM PEAK POWER:
 - 1 KILOWATT (5 mSEC PULSE WIDTH)
 - 1.9 WEIGHT: 0.50 Oz. MAX.

ALL OTHER MECHANICAL, ELECTRICAL, AND ENVIRONMENTAL CHARACTERISTICS ARE IN ACCORDANCE WITH MIL-D-39030

2.0 MARKING: MARK UNIT AS SHOWN (REF.: INK-04185-27-04)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

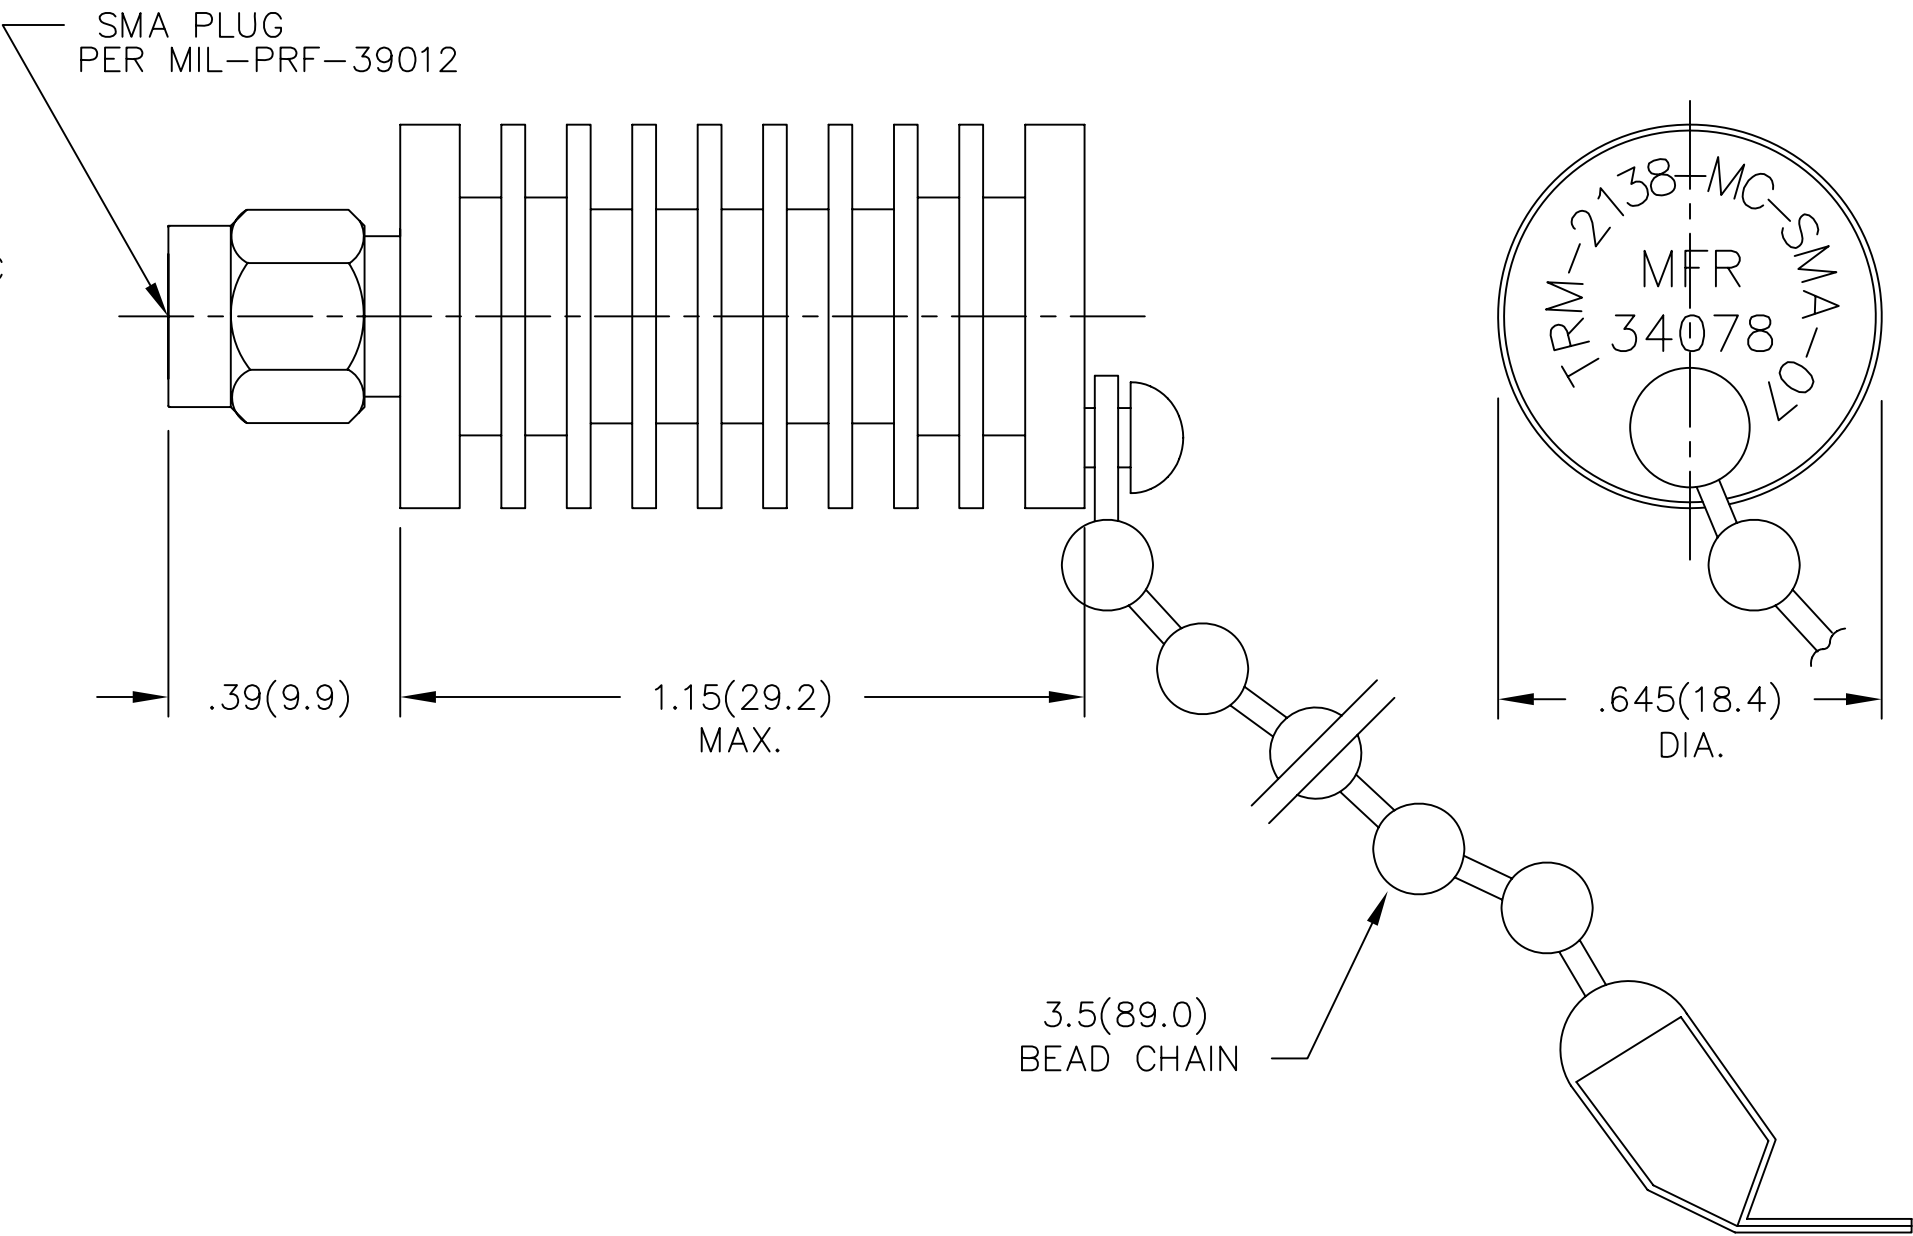

REV.	DESCRIPTION	DATE
-	RELEASED	11/2/95
-1	ADDED TITLEBLOCK	11/4/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		FSCM NO. 34078	MIDWEST MICROWAVE	
		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION
DRAWN/DATE A.BEATTY 10/27/95		ENG./DATE G.KOZAK 11/2/95	DRAWING NUMBER TRM-2138-MC-SMA-07	
CHECKED/DATE		APPROVED/DATE	SCALE: 3=1	SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[TRM-2138-MC-SMA-07](#)