


TS-16

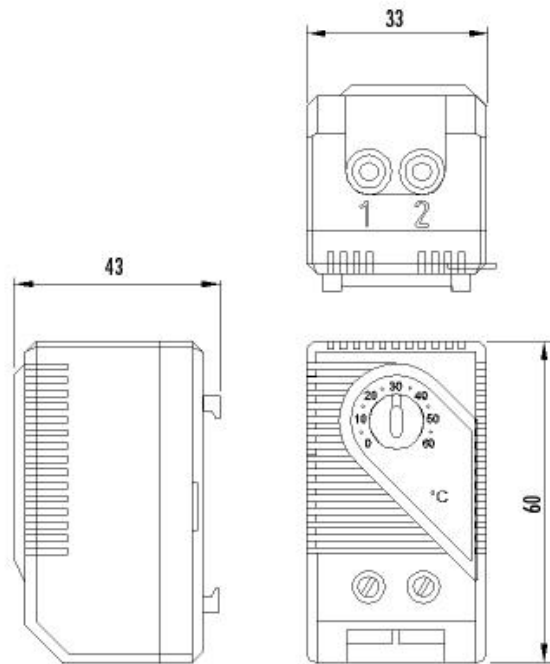

Technical Data	
Switching Difference (hysteresis)	12.6°F ± 7°F (7°C ± 4K)
Max. Tolerance	±7.2°F (4K)
Service Life	100,000 cycles
Switching Capacity (max. load)	15A resistive/ 2A inductive at 120 VAC 10A resistive/ 2A inductive at 250 VAC DC 30W
Minimum Load	20 mA (all voltages)
EMI/EMC compliance	EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
Connection	2-pole terminal for AWG 14 max.
Weight	1.4 oz (40g)
Operating temperature	-4 to 176°F (-20 to 80°C)
Storage temperature	-49 to 176°F (-45 to 80°C)
Protection Type	IP20
Scale on Housing	32 to 140°F