

- ◆ Rugged metal case for harsh industrial environments
- ◆ Industrial operating temperature range: -25°C to +70°C
- ◆ Overload and overtemperature protection
- ◆ Power boost up to 120 %
- ◆ Power-Good signal
- ◆ Shock and vibration proof
- ◆ International safety approval package
- ◆ ATEX certification for hazardous locations
- ◆ Decoupling module for redundant operation (optional)
- ◆ Wall mounting (opt.)
- ◆ 3-year product warranty



The TSPC series are high performance DIN-rail mount power supplies for harsh industrial environments. The design is based on the popular TRACOPOWER TSP series but with reduced electrical features to make these power supplies an easy to install and cost efficient but reliable solution for basic applications.

Excellent electrical specifications and high immunity against electrical disturbances makes these compact modules the best choice for reliable industrial systems and machines.

For system applications all models provide a Power-Good signal.

The TSPC series power supplies complies with the latest safety and EMC standards for industrial environments and include ATEX EN 60079 certification for applications in hazardous locations.

Models

Order code	Output power nominal	Output voltage nominal	Output current nominal
TSPC 050-112	50 W	12 VDC	4.0 A
TSPC 050-124	50 W	24 VDC	2.1 A
TSPC 080-112	80 W	12 VDC	6.6 A
TSPC 080-124	80 W	24 VDC	3.3 A
TSPC 120-124	120 W	24 VDC	5.0 A
TSPC 120-148	120 W	48 VDC	2.5 A
TSPC 240-124	240 W	24 VDC	10 A
TSPC 240-148	240 W	48 VDC	5.0 A
TSPC 480-124	480 W	24 VDC	20 A
TSPC 480-148	480 W	48 VDC	10 A

Input Specifications

Input voltage	– nominal ranges	TSPC 050	100 – 240 VAC universal input
		other models	100 – 120 / 220 – 240 VAC by selection switch
	– effective ranges	TSPC 050	85 – 264 VAC universal input
		other models	85 – 132 / 187 – 264 VAC by selection switch
	– output power derating at input <100 VAC		3.3 %/V
Input voltage frequency			47 – 63 Hz
Harmonic limits			EN 61000-3-2
Holdup time			10 ms min.
Inrush current			40 A
Recommended circuit breaker, characteristic C or fuse, slow blow type		– TSPC 080/120	6.0 – 16.0 A
		– TSPC 240	10.0 – 16.0 A
		– TSPC 480	16.0 – 25.0 A
Efficiency			85 – 93 %

Output Specifications

Output voltage adj. range		12 VDC models:	12 – 14 VDC
			output power derating above 12 VDC : 10 %/V
		24 VDC models:	24 – 28 VDC
			output power derating above 24 VDC : 5 %/V
		48 VDC models:	48 – 56 VDC
			output power derating above 48 VDC : 2.5 %/V
	Boost output current		120 % (at 24 VDC output voltage)
			continuous at <+50°C ambient temperature
– power derating above 50°C ambient		2 %/°C	
– power derating at input <115 VAC		1.3 %/V	
	– power derating at input <220 VAC	0.6 %/V (at upper input voltage range)	
Regulation	– Input variation	1 % max.	
	– Load variation (0–100 %)	1 % max.	
Ripple and Noise (20MHz bandwidth)			100 mVp-p typ. (200 mVp-p max.)
Overload protection			120 – 140 % of Iout nom., constant current
Short circuit current			90 % of Iout nom. (typ.), foldback
Output overvoltage protection			45 V
Overtemperature protection			switch off at overtemperature, automatic restart
Power back immunity		12 VDC models:	16 V (18 V for 1 sec.)
		24 VDC models:	35 V (40 V for 1 sec.)
		48 VDC models:	63 V (65 V for 1 sec.)
Power OK signal	– trigger threshold	12 VDC models:	10.0 – 11.5 V
		24 VDC models:	21.0 – 22.5 V
		48 VDC models:	42.0 – 45.0 V
	– output signal	12 VDC models:	open collector 20 mA max.
		24 VDC models:	open collector 10 mA max.
		48 VDC models:	open collector 5 mA max.
Max. capacitive load			unlimited

General Specifications

Temperature range	– Operating	–25°C to +70°C max.
	– output current derating above 60°C ambient	2.5 %/°C
	– Storage	–40°C to +85°C
Cooling		convection cooling, no internal fan
Humidity (non condensing)		95 % rel. H max.
Pollution degree		2
Temperature coefficient		0.02 %/K


General Specifications

Reliability, calculated MTBF at +25°C acc. to IEC 61709 www.tracopower.com/products/tspc-mtbf.pdf		– TSPC 080	2.4 Mio. h
		– TSPC 120	2.5 Mio. h
		– TSPC 240	1.7 Mio. h
		– TSPC 480	1.4 Mio. h
Isolation		according to IEC/EN 60950-1, UL 60950-1, UL 508	
Safety standards	– Information technology equipment	IEC/EN 60950-1, UL 60950-1, CSA 22.2 No 60950-1-07	
	– Industrial control equipment	UL 508, CSA-C22.2 No.107	
	– Electrical equipment for machines	EN 60204-1	
	– Electronic equipment for power installation	EN 50178	
	– Safety of transformers	EN 61558-2-6, EN 61558-2-16	
	– Control equipment for hazardous location	EN 60079-15 II3G EX nA IIC T4	
	– ATEX (for IP 54 enclosure)	certificate no. EPS 10 ATEX 1 269 X	
	– Certification documents	www.tracopower.com/overview/tspc	
Class of protection		safety class I (IEC 536)	
Degree of protection		IP 20 (IEC/EN 60529)	
Electromagnetic compatibility (EMC), Emissions		EN 61000-6-3, EN 61204-3	
	– Conducted RI suppression on input	EN 55011 class B, EN 55022 class B,	
	– Radiated RI suppression	EN 55011 class B, EN 55022 class B,	
Electromagnetic compatibility (EMC), Immunity		EN 61000-6-2, EN 61204-3	
	– Electrostatic discharge (ESD)	IEC/EN 61000-4-2	4 kV / 8 kV criteria B
	– Radiated RF field immunity	IEC/EN 61000-4-3	10 V / m criteria A
	– Electrical fast transient / burst immunity	IEC/EN 61000-4-4	2 kV criteria B
	– Surge immunity	IEC/EN 61000-4-5	1 kV / 2 kV criteria B
	– Immunity to conducted RF disturbances	IEC/EN 61000-4-6	10 V criteria A
	– Power frequency field immunity	IEC/EN 61000-4-8	30 A / m criteria A
	– Mains voltage dips and interruptions	IEC/EN 61000-4-11	criteria B/C
Environment	– Vibration acc. IEC 68-2-6;	3 axis, sine sweep, 10 – 55 Hz, 1 g, 1 oct/min	
	– Shock acc. IEC 60068-2-27	3 axis, 15 g half sine, 11 ms	
Enclosure material		aluminium (chassis) / stainless steel (cover)	
Mounting	– DIN-rail mounting	for DIN-rails as per EN 50022-35x15/7.5	
	– Wall mounting (option)	(snap-on with self-locking spring) with wall mounting bracket - see page 12	
Environmental compliance	– Reach	www.tracopower.com/overview/tspc	
	– RoHS	RoHS directive 2011/65/EU	
Power Good signal		21.0 – 22.5 V, open collector 10 mA	
Connection	– Input / Output	screw terminals	
	– Power Good signal (mating connector)	Phoenix contact MC 1,5/2-ST-3,5 (not included)	
Installation instructions		www.tracopower.com/products/tspc-inst.pdf	

Accessories (optional)



Decoupling module for redundant operation see:
www.tracopower.com/products/tspc-dcm.pdf




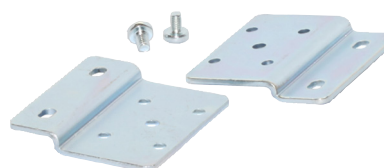


Wall mounting brackets: see last page

Outline Dimensions

TSPC 050-112

TSPC 050-124

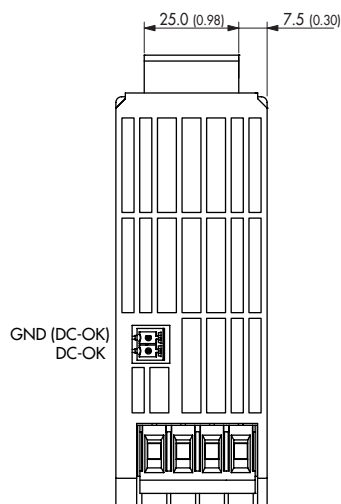
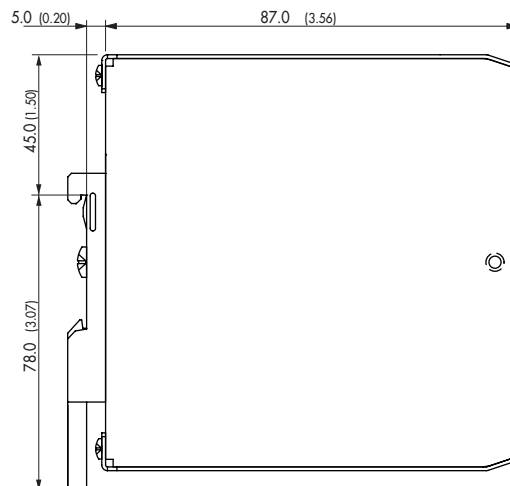
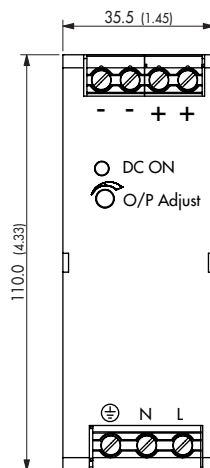
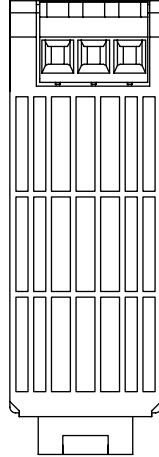


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

TSPC 080-112

TSPC 080-124

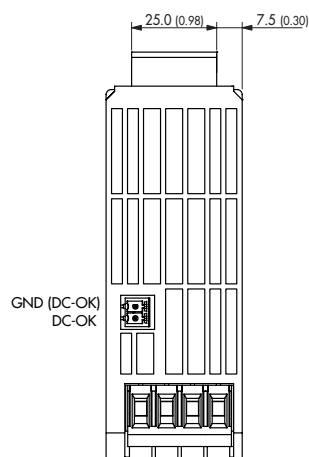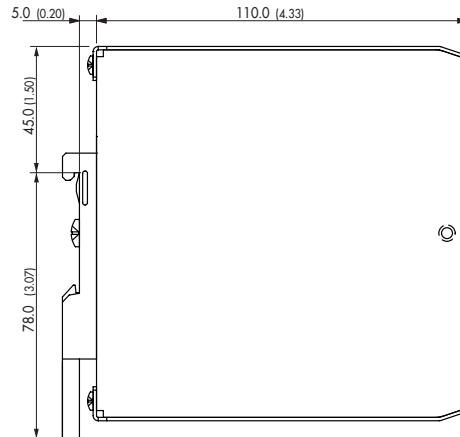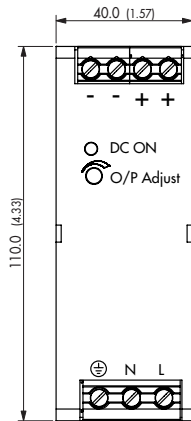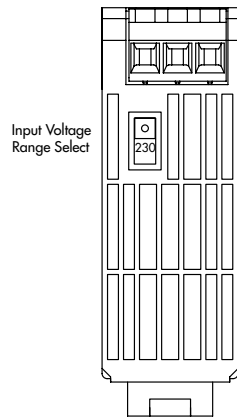


Weight: 400 g (14.1 oz)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

Outline Dimensions

TSPC 120-124

TSPC 120-148

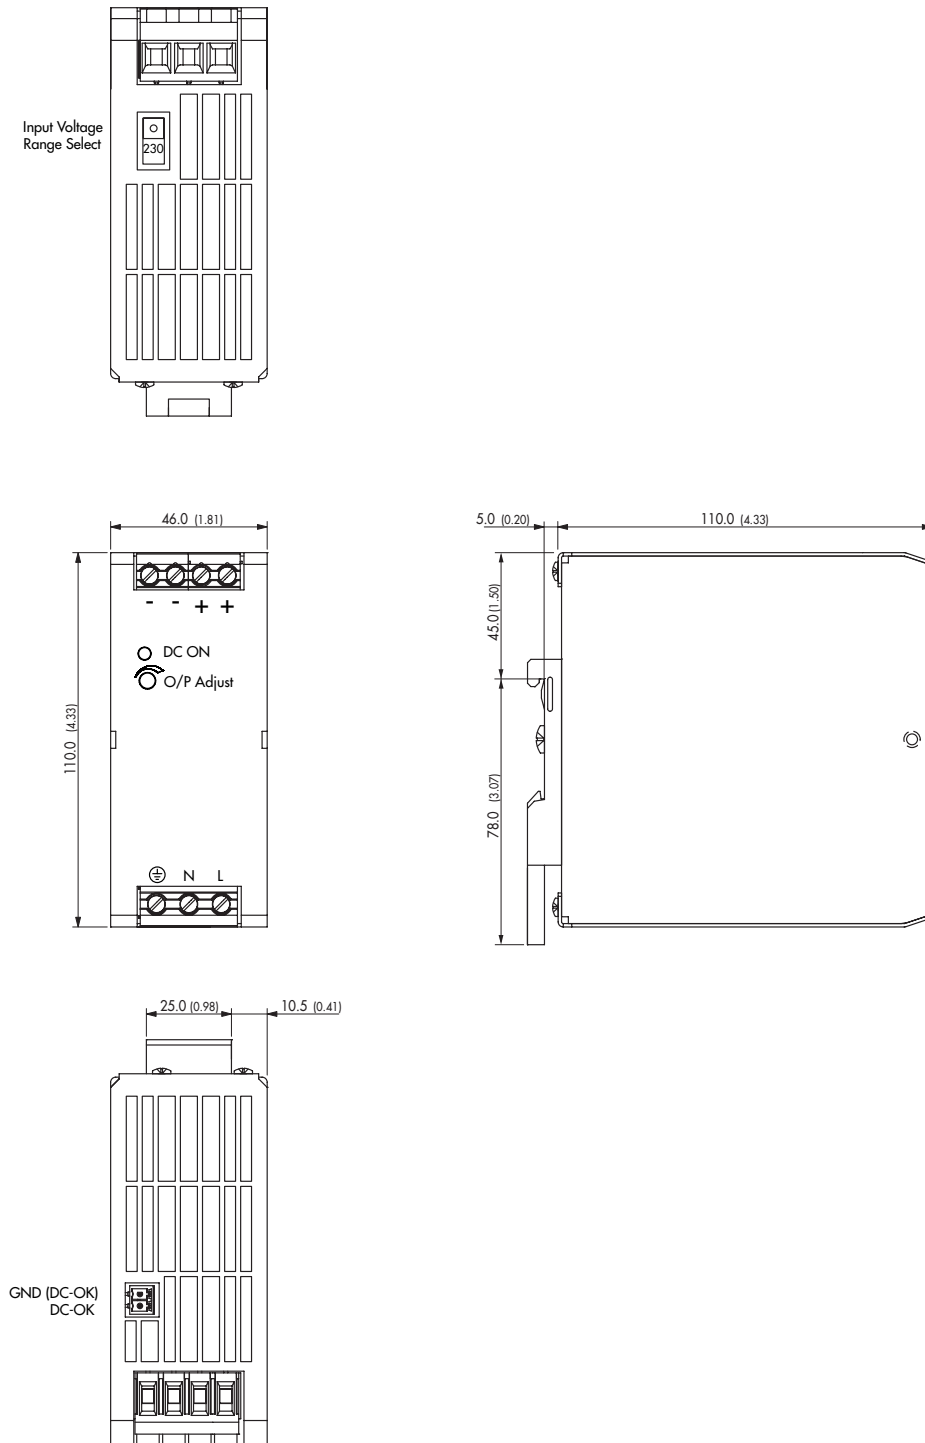





Weight: 500 g (17.7 oz)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

Outline Dimensions

TSPC 240-124

TSPC 240-148

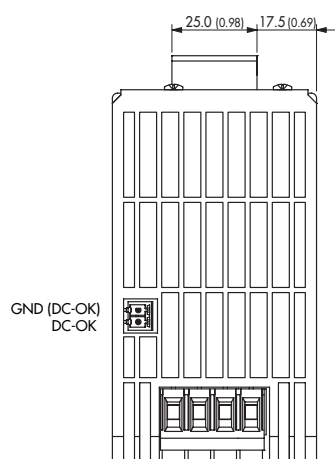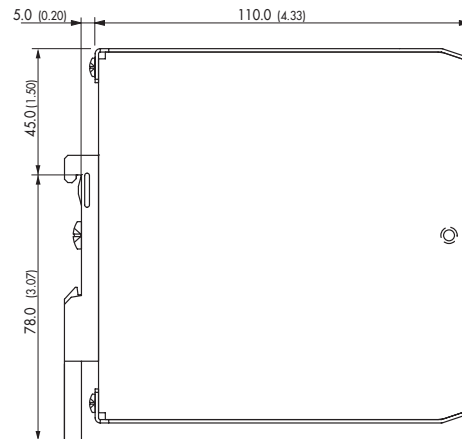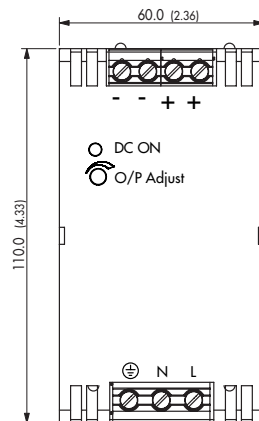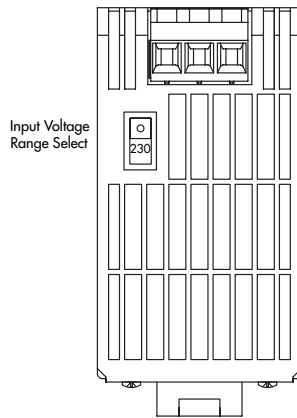


Weight: 750 g (26.5 oz)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

Outline Dimensions

TSPC 480-124

TSPC 480-148


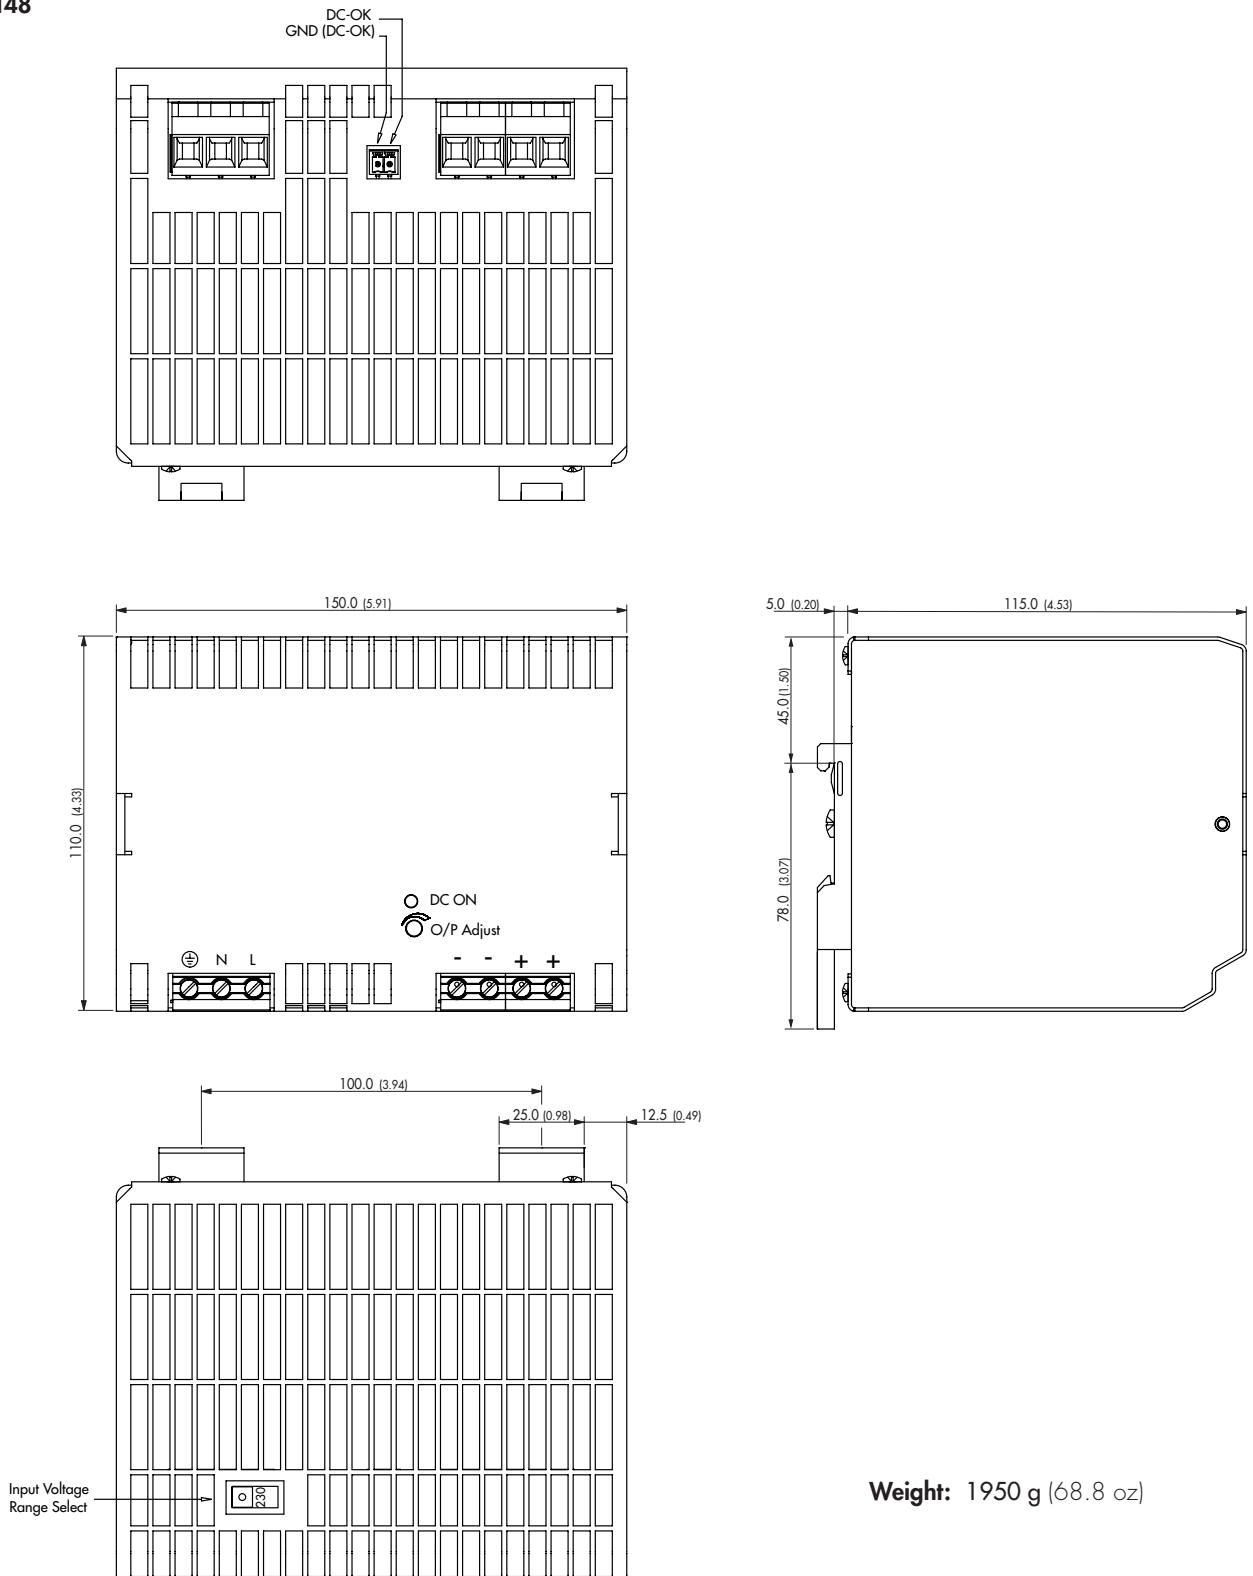


Weight: 1950 g (68.8 oz)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

TSP-WMK Wall Mounting Bracket

order code	for models	content of kit
TSP-WMK03	TSPC 080, TSPC 120, TSPC 240, TSP-DCM600	1 bracket
TSP-WMK02	TSPC 480	2 brackets

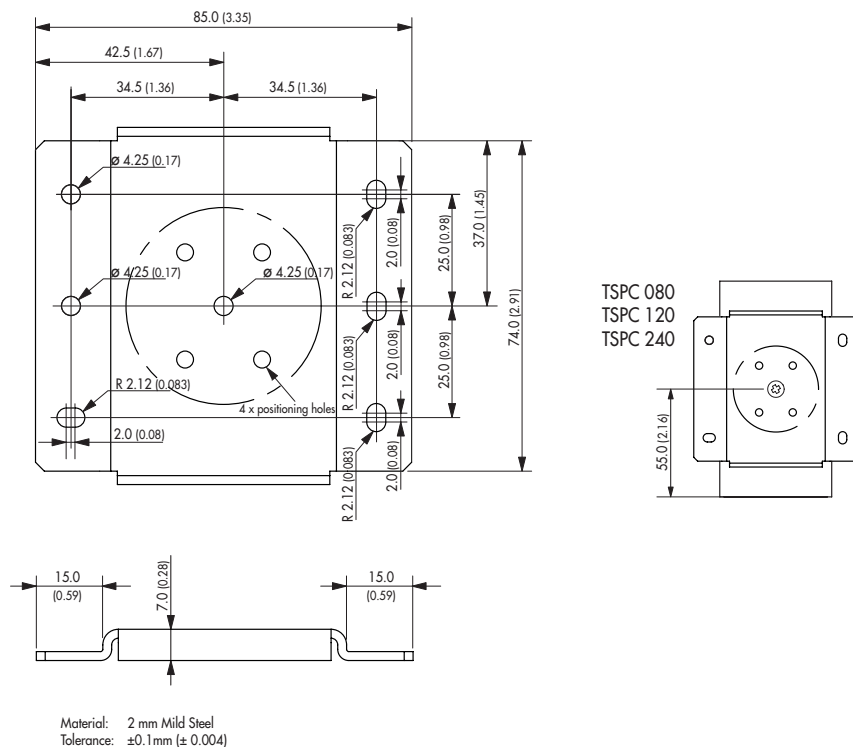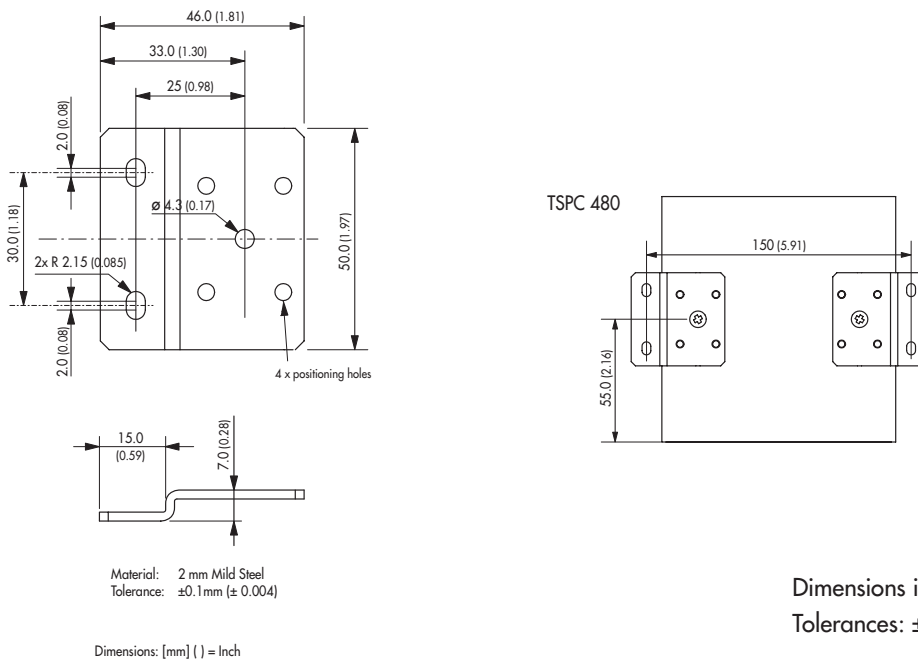TSP-WMK03

TSP-WMK02


Dimensions in [mm], () = Inch
Tolerances: $\pm 0.5\text{ mm}$ (± 0.02)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TSPC 120-124](#) [TSPC 080-124](#) [TSPC 080-112](#) [TSPC 240-148](#) [TSPC 120-148](#) [TSPC 050-124](#) [TSPC 050-112](#)
[TSPC 240-124UPS](#) [TSPC 240-124](#) [TSPC-DCM600](#) [TSPC 480-124](#) [TSPC 480-148](#)