

Small Signal Product

Features

- ◇ 150mW power dissipation
- ◇ High voltages form 2 - 39 V
- ◇ Designed for mounting on small surface
- ◇ Extremely thin / leadless package
- ◇ Pb free product

Mechanical Data

- ◇ Cases : 0603 standard package
molded plastic
- ◇ Terminals : Gold plated, solderable per
MIL-STD-750, method 2026
- ◇ Polarity : Indicated by cathode band
- ◇ Weight : 0.003 grams (approximately)

0603



Ordering Information (example)

Part No.	Package	Packing	Packing code	Packing code (Green)	Manufacture code
TSZU52C2V0	0603	10K / 13" Reel	--	RCG	

Note : Detail please see "Ordering Information(detail, example)" bel

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacity load, derate current by 20%.

Parameter	Symbol	Value	Unit
Maximum Power Dissipation	P_D	150	mW
Maximum Forward Voltage Drop at $I_F = 10 \text{ mA}$	V_F	0.9	V
Forward Current, Surge Peak 8.3 ms Single Half Sine-wave Superimposed on Rate Load (JEDEC method)	I_{FSM}	2.0	A
Operating Junction and Storage Temperature Range	$T_{STG} \text{ , } T_J$	-55 to +125	°C

Small Signal Product

Electrical Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Device	Device Marking Code	Zener Voltage			Operating Resistance		sing Operating Resistan		Reverse Current	
		V_Z (Volt)			Z_{ZT} (Ohm)		Z_{ZK} (Ohm)		I_R (μA)	
		Min	Max	I_Z (mA)	Max	I_Z (mA)	Max	I_Z (mA)	Max	V_R (V)
TSZU52C2V0	Z0	1.90	2.10	5	100	5	600	1	100	1.0
TSZU52C2V2	Z1	2.09	2.31	5	100	5	600	1	100	1.0
TSZU52C2V4	Z2	2.28	2.52	5	85	5	600	1	100	1.0
TSZU52C2V7	Z3	2.57	2.84	5	83	5	500	1	75	1.0
TSZU52C3V0	Z4	2.85	3.15	5	95	5	500	1	50	1.0
TSZU52C3V3	Z5	3.14	3.47	5	95	5	500	1	25	1.0
TSZU52C3V6	Z6	3.42	3.78	5	95	5	500	1	15	1.0
TSZU52C3V9	Z7	3.71	4.10	5	95	5	500	1	10	1.0
TSZU52C4V3	Z8	4.09	4.52	5	95	5	500	1	5.0	1.0
TSZU52C4V7	Z9	4.47	4.94	5	78	5	500	1	5.0	2.0
TSZU52C5V1	ZA	4.85	5.36	5	60	5	480	1	0.1	0.8
TSZU52C5V6	ZB	5.32	5.88	5	40	5	400	1	0.1	1.0
TSZU52C6V2	ZC	5.89	6.51	5	10	5	200	1	0.1	2.0
TSZU52C6V8	ZE	6.46	7.14	5	8	5	150	1	0.1	3.0
TSZU52C7V5	ZF	7.13	7.88	5	7	5	50	1	0.1	5.0
TSZU52C8V2	ZG	7.79	8.61	5	7	5	50	1	0.1	6.0
TSZU52C9V1	ZH	8.65	9.56	5	10	5	50	1	0.1	7.0
TSZU52C10	ZJ	9.50	10.50	5	15	5	70	1	0.1	7.5
TSZU52C11	ZK	10.45	11.55	5	20	5	70	1	0.1	8.5
TSZU52C12	ZM	11.40	12.60	5	20	5	90	1	0.1	9.0
TSZU52C13	ZN	12.35	13.65	5	25	5	110	1	0.1	10
TSZU52C15	ZP	14.25	15.75	5	30	5	110	1	0.1	11
TSZU52C16	ZQ	15.20	16.80	5	40	5	170	1	0.1	12
TSZU52C18	ZR	17.10	18.90	5	50	5	170	1	0.1	14
TSZU52C20	ZS	19.00	21.00	5	50	5	220	1	0.1	15
TSZU52C22	ZT	20.90	23.10	5	55	5	220	1	0.1	17
TSZU52C24	ZU	22.80	25.20	5	80	5	220	1	0.1	18
TSZU52C27	ZV	25.65	28.35	5	80	5	250	1	0.1	20
TSZU52C30	ZW	28.50	31.50	5	80	5	250	1	0.1	23
TSZU52C33	ZX	31.35	34.65	5	80	5	250	1	0.1	25
TSZU52C36	ZY	34.20	37.80	5	90	5	250	1	0.1	27
TSZU52C39	ZZ	37.05	40.95	5	90	5	300	1	0.1	29

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES (TSZU52C2V0 thru TSZU52C39)

Fig. 1 Temperature Coefficients

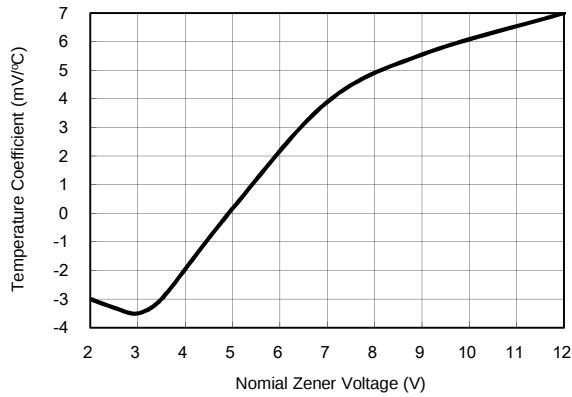


Fig. 2 Temperature Coefficients

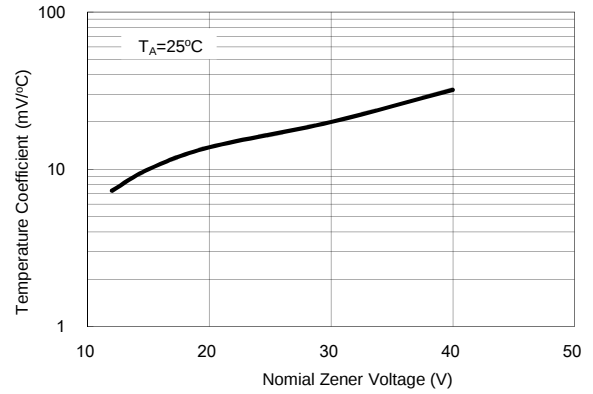


Fig. 3 Effect of Zener Voltage on Zener Impedance

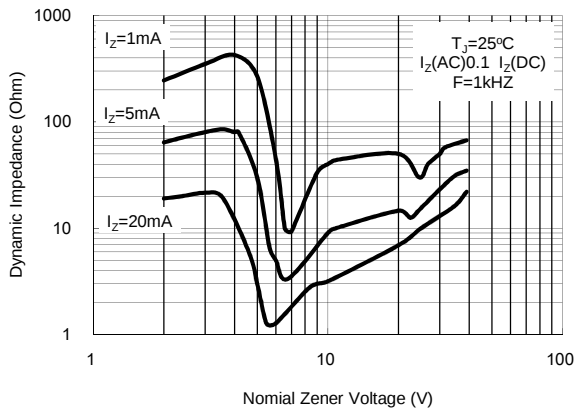


Fig. 4 Typical Forward Voltage

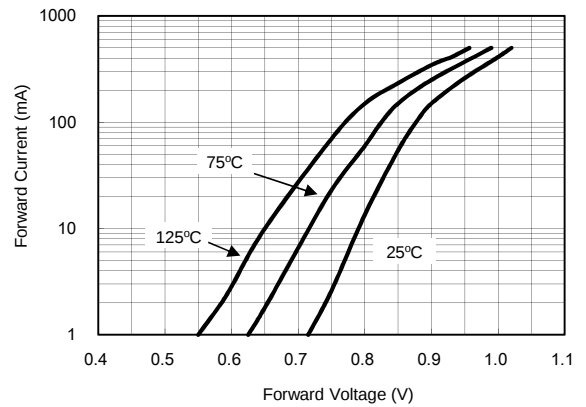


Fig. 5 Typical Leakage Current


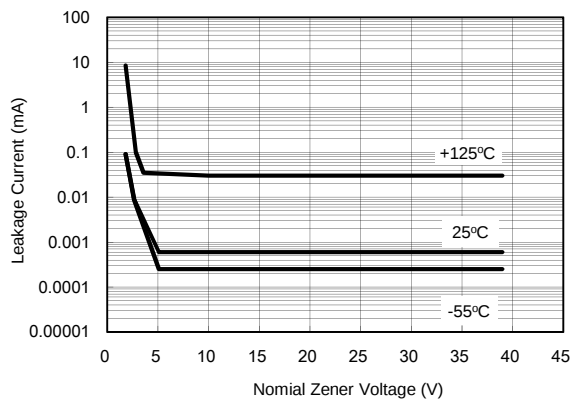


Fig. 6 Typical Capacitance

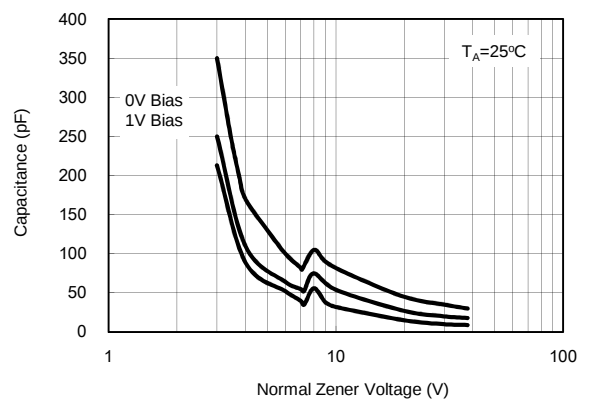

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES (TSZU52C2V0 thru TSZU52C39)

Fig. 7 Zener Voltage VS. Zener Current

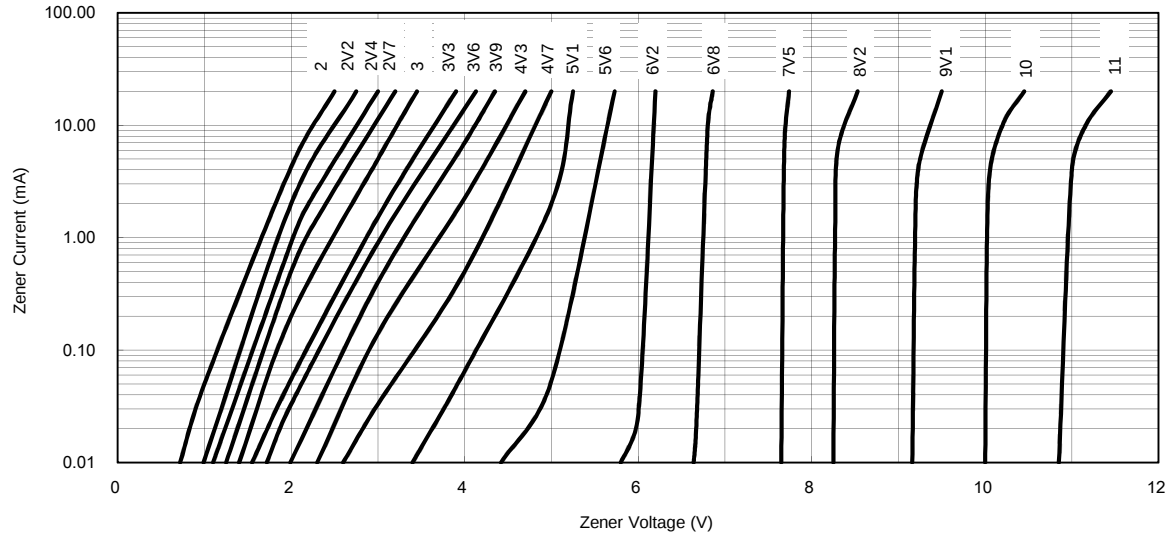


Fig. 8 Zener Voltage vs. Zener Currnt


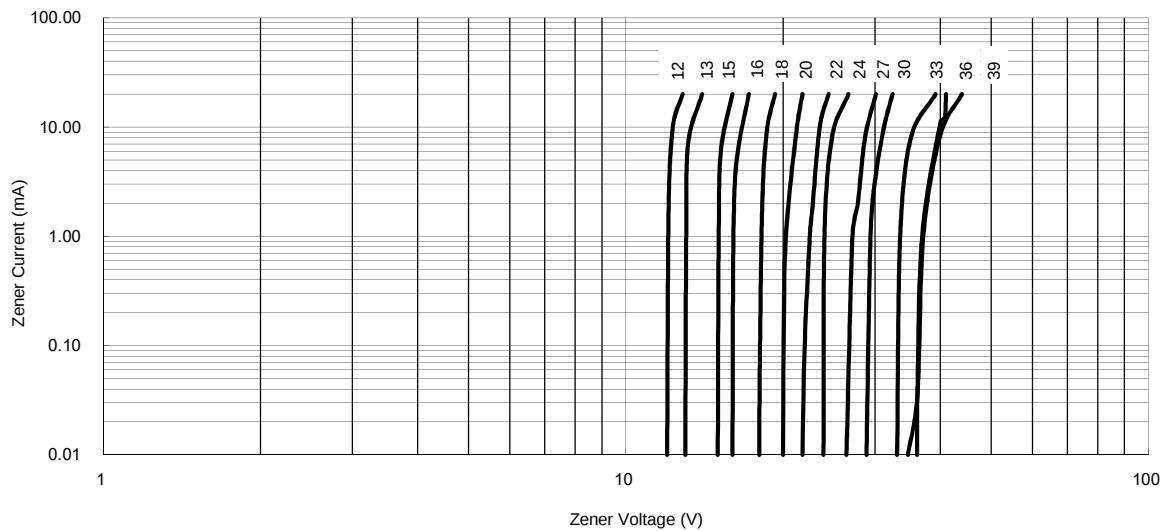


Fig. 9 Steady State Power Derating

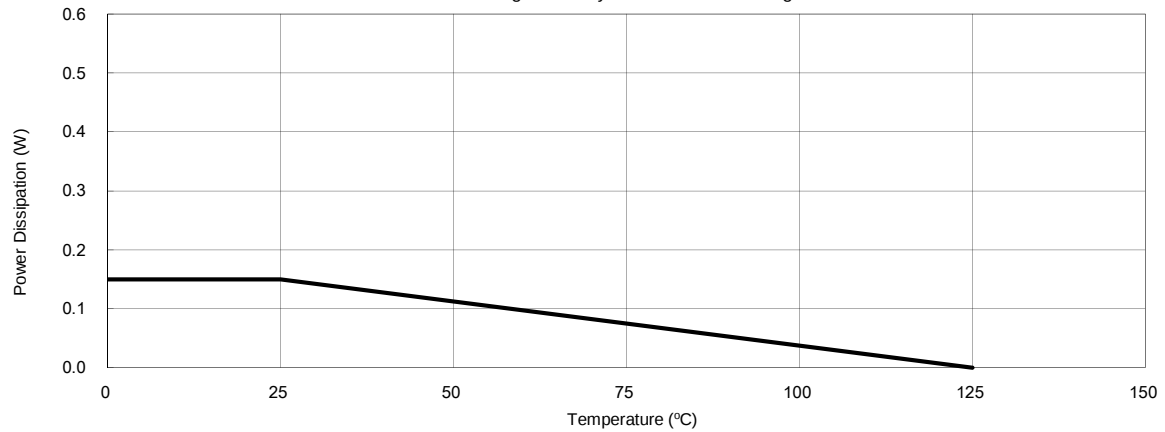

Small Signal Product

Ordering information (Detail, example)

Part No.	Package	Packing	Packing code	Packing code (Green)	Manufacture code
TSZU52Cxx (Note 1)	0603	10K / 13" Reel	--	RCG	(Note 2)
	0603	5K / 7" Reel	--	RZG	
	0603	5K / 7" Reel	RZ	RZG	
TSZU52C2V0	0603	10K / 13" Reel	--	RCG	
TSZU52C2V0	0603	10K / 13" Reel	--	RCG	


Note 1: "xx" is Device Code from "2V0" thru "39".

Note 2 : Manufacture special control, if empty means no special control requirement.

Tape & Reel specification

Small Signal Product

Dimensions

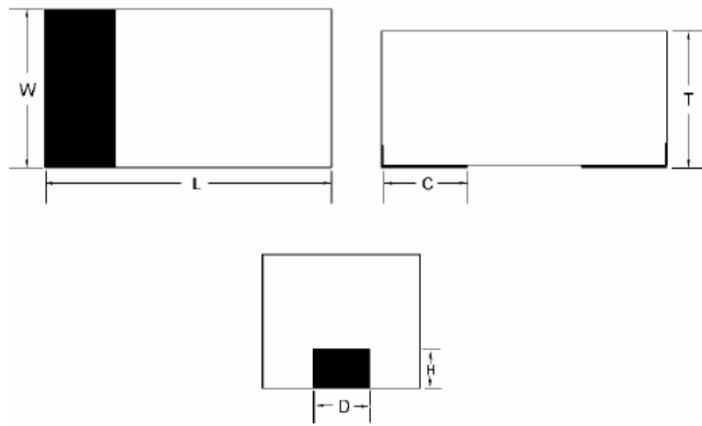

DIM.	Unit(mm)			Unit(inch)		
	Min	Typ.	Max	Min	Typ.	Max
L	1.60	-	1.80	0.063	-	0.071
W	0.80	-	1.00	0.031	-	0.000
T	0.70	-	0.85	0.027	-	0.033
C	-	0.35	-	-	0.014	-
D	-	0.45	-	-	0.018	-
H	-	0.30	-	-	0.012	-

Suggested PAD Layout