


TV02W5V0-G Thru TV02W191-G


Working Peak Reverse Voltage:5.0-190Volts**Peak Pulse Power:200Watts****RoHS Device**

Features

- Glass passivated chip.
- Low leakage current.
- 200W peak pulse power capacity with a 10/1000us waveform, repetitive rate (duty cycle):0.01%.
- Uni and bidirectional unit.
- Excellent clamping capability.
- Very fast response time.

Mechanical data

- Case: Molded plastic.
- Epoxy: UL 94V-0 rate flame retardant.
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed.
- Polarity: Color band denotes cathode end except bipolar.
- Mounting position: Any.

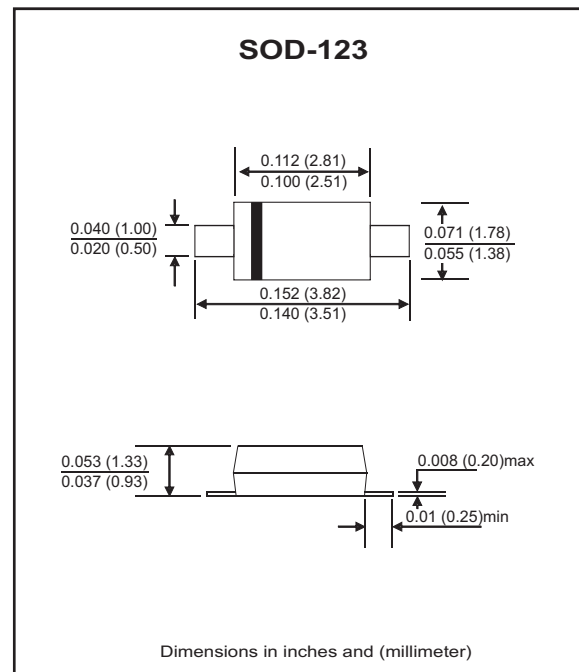

Maximum Rating AND Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Symbol	Value	Unit
Peak power dissipation at 10/1000μs waveform	P _{PP}	200	W
Peak power dissipation at 8/20μs waveform	P _{PP}	1000	W
Peak pulse current with a 10/1000μs waveform	I _{PP}	See next table	A
Power dissipation on infinite heatsonk at T _L = 75°C	P _D	0.4	W
Peak forward surge current, 8.3ms single half sone-wave undirestional only ₍₁₎	I _{FSM}	20	A
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes:

Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.

Rating and Characteristic Curves (TV02W5V0-G Thru TV02W191-G)

Fig. 1 - Pulse Derating Curve

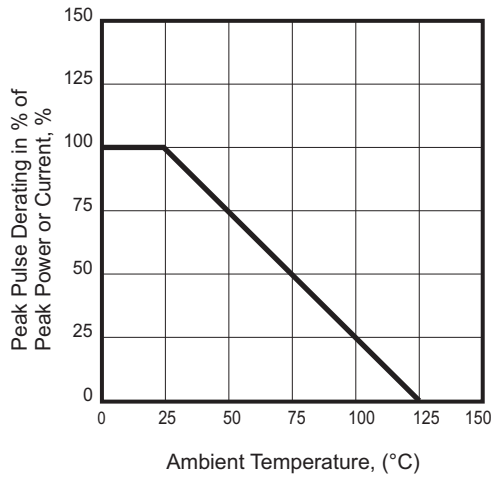


Fig.2 - Steady State Power Derating Curve

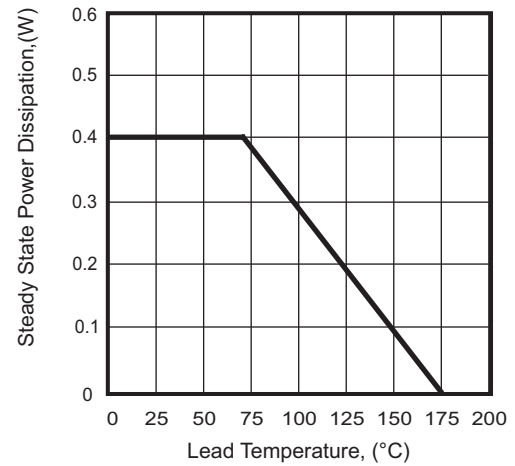


Fig. 3 - Pulse Waveform

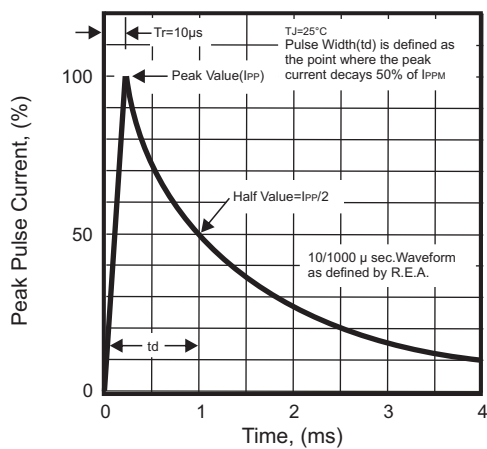


Fig. 4 - Peak Pulse Power Rating Curve


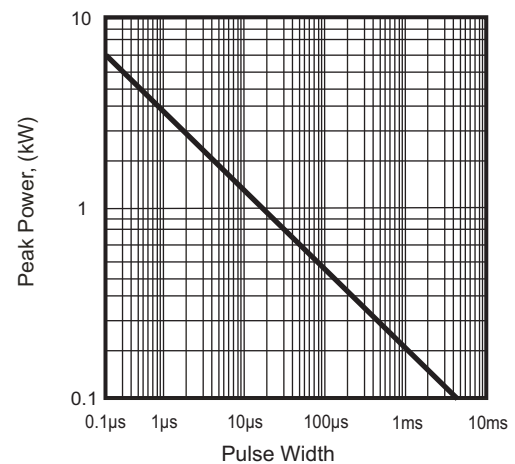


Fig. 5 - Maximum non-repetitive surge current

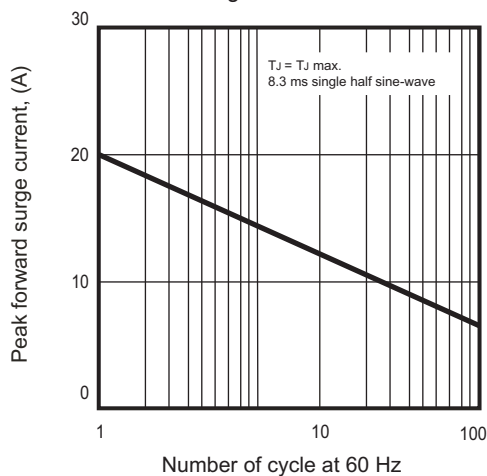

SMD Transient Voltage Suppressor


Electrical Characteristics (TV02W5V0-G Thru TV02W191-G)

Part No	Absolute Maximum Rating (Ta=25°C)				V _C (Max.) @ IPP	IPP @ 10/1000us	I _R @ V _{RWM}	Marking Code	
	V _{RWM}	V _{BR} Min.	V _{BR} Max.	I _T					
	(V)	(V)	(V)	(mA)				Uni	Bi
TV02W5V0(B)-G	5.0	6.40	7.00	10	9.20	21.7	400	FE	KE
TV02W6V0(B)-G	6.0	6.67	7.37	10	10.3	19.4	400	FG	KG
TV02W6V5(B)-G	6.5	7.22	7.98	10	11.2	17.9	250	FK	KK
TV02W7V0(B)-G	7.0	7.78	8.60	10	12.0	16.7	100	FM	KM
TV02W7V5(B)-G	7.5	8.33	9.21	1	12.9	15.5	50	FP	KP
TV02W8V0(B)-G	8.0	8.89	9.83	1	13.6	14.7	25	FR	KR
TV02W8V5(B)-G	8.5	9.44	10.4	1	14.4	13.9	10	FT	KT
TV02W9V0(B)-G	9.0	10.0	11.1	1	15.4	13.0	5	FV	KV
TV02W100(B)-G	10	11.1	12.3	1	17.0	11.8	2.5	FX	KX
TV02W110(B)-G	11	12.2	13.5	1	18.2	11.0	2.5	FZ	KZ
TV02W120(B)-G	12	13.3	14.7	1	19.9	10.1	2.5	HE	LE
TV02W130(B)-G	13	14.4	15.9	1	21.5	9.30	1	HG	JG
TV02W140(B)-G	14	15.6	17.2	1	23.2	8.62	1	HK	LK
TV02W150(B)-G	15	16.7	18.5	1	24.4	8.20	1	HM	LM
TV02W160(B)-G	16	17.8	19.7	1	26.0	7.69	1	HP	LP
TV02W170(B)-G	17	18.9	20.9	1	27.6	7.25	1	HR	LR
TV02W180(B)-G	18	20.0	22.1	1	29.2	6.85	1	HT	LT
TV02W190(B)-G	19	21.1	23.3	1	30.6	6.54	1	HB	LB
TV02W200(B)-G	20	22.2	24.5	1	32.4	6.17	1	HV	LV
TV02W220(B)-G	22	24.4	26.9	1	35.5	5.63	1	HX	LX
TV02W240(B)-G	24	26.7	29.5	1	38.9	5.14	1	HZ	LZ
TV02W260(B)-G	26	28.9	31.9	1	42.1	4.75	1	JE	ME
TV02W280(B)-G	28	31.1	34.4	1	45.4	4.41	1	JG	MG
TV02W300(B)-G	30	33.3	36.8	1	48.4	4.13	1	JK	MK
TV02W330(B)-G	33	36.7	40.6	1	53.3	3.75	1	JM	MM
TV02W360(B)-G	36	40.0	44.2	1	58.1	3.44	1	JP	MP
TV02W400(B)-G	40	44.4	49.1	1	64.5	3.10	1	JR	MR
TV02W430(B)-G	43	47.8	52.8	1	69.4	2.88	1	JT	MT
TV02W450(B)-G	45	50.0	55.3	1	72.7	2.75	1	JV	MV
TV02W480(B)-G	48	53.3	58.9	1	77.4	2.58	1	JX	MX
TV02W510(B)-G	51	56.7	62.7	1	82.4	2.43	1	JZ	MZ
TV02W540(B)-G	54	60.0	66.3	1	87.1	2.30	1	XE	NE
TV02W580(B)-G	58	64.4	71.2	1	93.6	2.14	1	XG	NG
TV02W600(B)-G	60	66.7	73.7	1	96.8	2.07	1	XK	NK
TV02W640(B)-G	64	71.1	78.6	1	103	1.94	1	XM	NM
TV02W700(B)-G	70	77.8	86.0	1	113	1.77	1	XP	NP
TV02W750(B)-G	75	83.3	92.1	1	121	1.65	1	XR	NR
TV02W780(B)-G	78	86.7	95.8	1	126	1.59	1	XT	NT
TV02W800(B)-G	80	88.8	97.6	1	129	1.55	1	XB	NB
TV02W850(B)-G	85	94.4	104	1	137	1.46	1	XV	NV
TV02W900(B)-G	90	100	111	1	146	1.37	1	XX	NX
TV02W101(B)-G	100	111	123	1	162	1.23	1	XZ	NZ
TV02W111(B)-G	110	122	135	1	177	1.13	1	TE	PE
TV02W121(B)-G	120	133	147	1	193	1.04	1	TG	PG
TV02W131(B)-G	130	144	159	1	209	0.96	1	TK	PK
TV02W141(B)-G	140	155	171	1	224	0.89	1	TB	PB
TV02W151(B)-G	150	167	185	1	243	0.82	1	TM	PM
TV02W161(B)-G	160	178	197	1	259	0.77	1	TP	PP
TV02W171(B)-G	170	189	209	1	275	0.73	1	TR	PR
TV02W181(B)-G	180	200	220	1	290	0.69	1	TT	PT
TV02W191(B)-G	190	211	232	1	290	0.69	1	TV	PV

Notes:

1. Suffix B after part number to specify bi-directional devices.

Reel Taping Specification

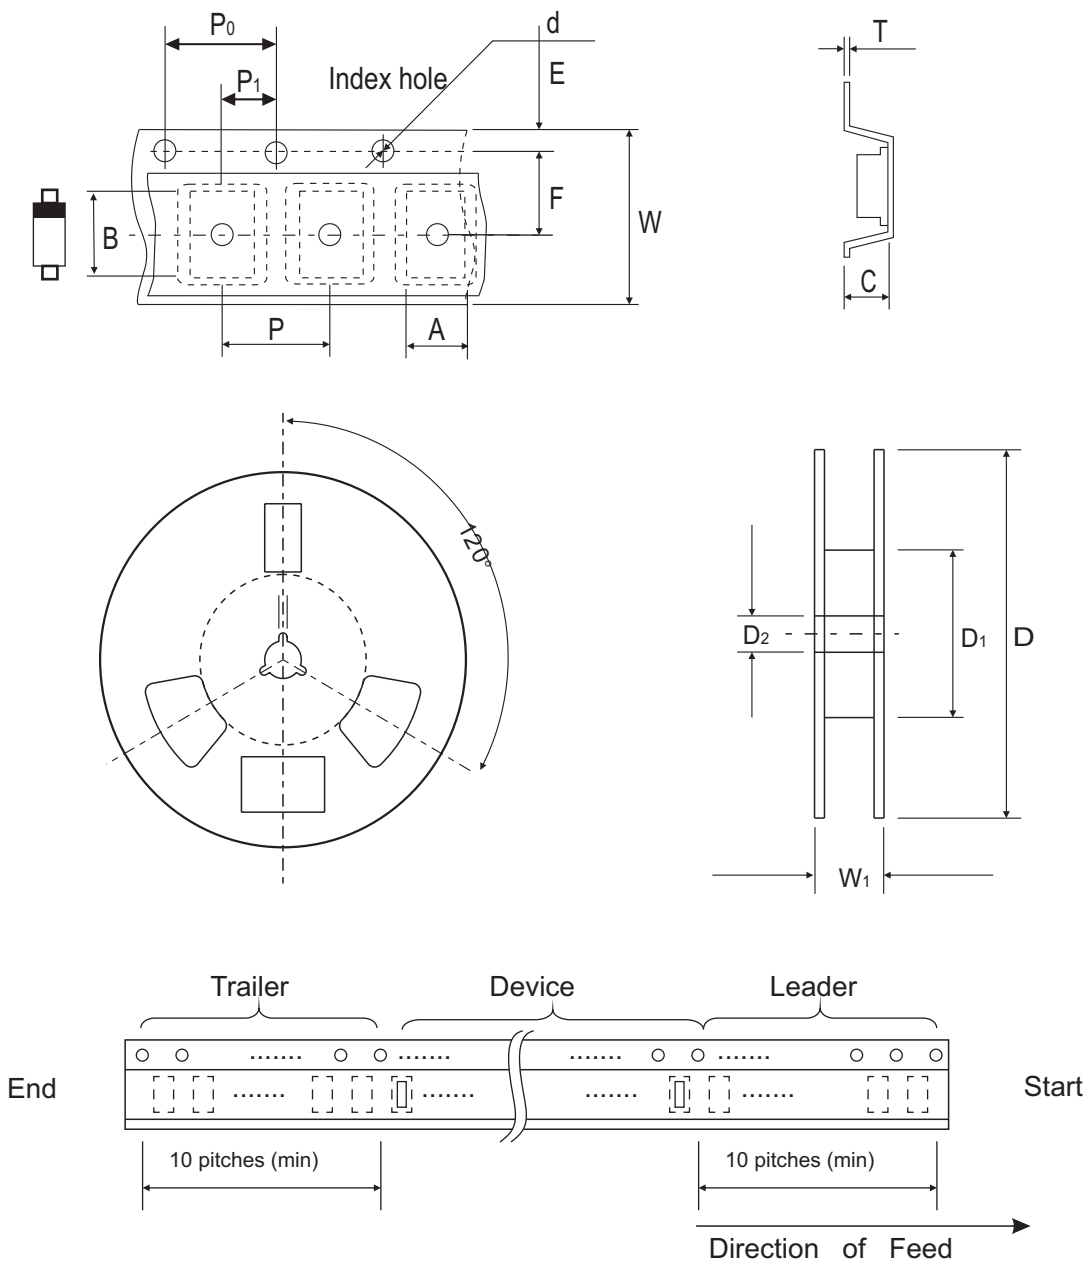


SOD-123	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.85 ± 0.10	3.94 ± 0.10	1.57 ± 0.10	1.55 ± 0.10	178 ± 1.00	54.40 ± 0.40	13.0 ± 0.20
	(inch)	0.073 ± 0.004	0.155 ± 0.004	0.062 ± 0.004	0.061 ± 0.004	7.008 ± 0.039	2.142 ± 0.016	0.512 ± 0.008

SOD-123	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 \pm 0.30/-0.10$	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.158 ± 0.004	0.158 ± 0.004	0.079 ± 0.004	$0.315 \pm 0.012/-0.004$	0.374 ± 0.039

Suggested PAD Layout

SIZE	SOD-123	
	(mm)	(inch)
A	3.35	0.132
B	0.80	0.032
C	1.00	0.039
D	4.15	0.163
E	2.55	0.100

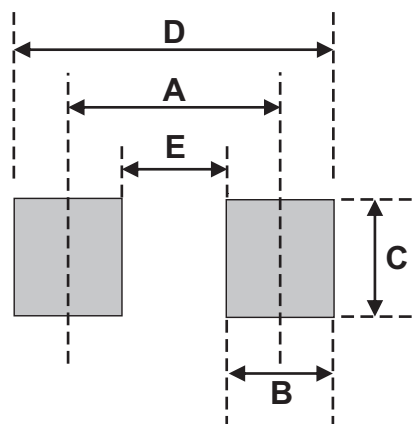

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOD-123	3,000	7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Comchip Technology:

[TV02W100-G](#) [TV02W101B-G](#) [TV02W101-G](#) [TV02W110B-G](#) [TV02W110-G](#) [TV02W111B-G](#) [TV02W111-G](#)
[TV02W120B-G](#) [TV02W120-G](#) [TV02W121B-G](#) [TV02W121-G](#) [TV02W130B-G](#) [TV02W130-G](#) [TV02W131B-G](#)
[TV02W131-G](#) [TV02W140B-G](#) [TV02W140-G](#) [TV02W141B-G](#) [TV02W141-G](#) [TV02W150B-G](#) [TV02W150-G](#)
[TV02W151B-G](#) [TV02W151-G](#) [TV02W160B-G](#) [TV02W160-G](#) [TV02W161B-G](#) [TV02W161-G](#) [TV02W170B-G](#)
[TV02W170-G](#) [TV02W171B-G](#) [TV02W171-G](#) [TV02W180B-G](#) [TV02W180-G](#) [TV02W181B-G](#) [TV02W181-G](#)
[TV02W190B-G](#) [TV02W190-G](#) [TV02W191B-G](#) [TV02W191-G](#) [TV02W200B-G](#) [TV02W200-G](#) [TV02W220B-G](#)
[TV02W220-G](#) [TV02W240B-G](#) [TV02W240-G](#) [TV02W260B-G](#) [TV02W260-G](#) [TV02W280B-G](#) [TV02W280-G](#)
[TV02W300B-G](#) [TV02W300-G](#) [TV02W330B-G](#) [TV02W330-G](#) [TV02W360B-G](#) [TV02W360-G](#) [TV02W400B-G](#)
[TV02W400-G](#) [TV02W430B-G](#) [TV02W430-G](#) [TV02W450B-G](#) [TV02W450-G](#) [TV02W480B-G](#) [TV02W480-G](#)
[TV02W510B-G](#) [TV02W510-G](#) [TV02W540-G](#) [TV02W580B-G](#) [TV02W580-G](#) [TV02W5V0B-G](#) [TV02W5V0-G](#)
[TV02W600B-G](#) [TV02W600-G](#) [TV02W640B-G](#) [TV02W640-G](#) [TV02W6V0B-G](#) [TV02W6V0-G](#) [TV02W6V5B-G](#)
[TV02W6V5-G](#) [TV02W700B-G](#) [TV02W700-G](#) [TV02W750B-G](#) [TV02W750-G](#) [TV02W780B-G](#) [TV02W780-G](#)
[TV02W7V0B-G](#) [TV02W7V0-G](#) [TV02W7V5B-G](#) [TV02W7V5-G](#) [TV02W800B-G](#) [TV02W800-G](#) [TV02W850B-G](#)
[TV02W850-G](#) [TV02W8V0B-G](#) [TV02W8V0-G](#) [TV02W8V5B-G](#) [TV02W8V5-G](#) [TV02W900B-G](#) [TV02W900-G](#)
[TV02W9V0B-G](#) [TV02W9V0-G](#)