
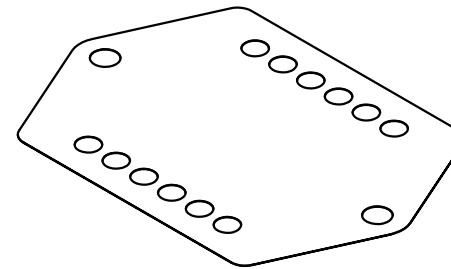
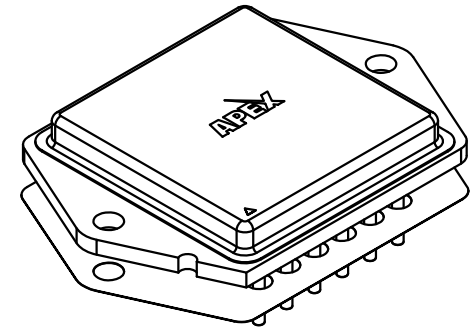


4

3

2

1

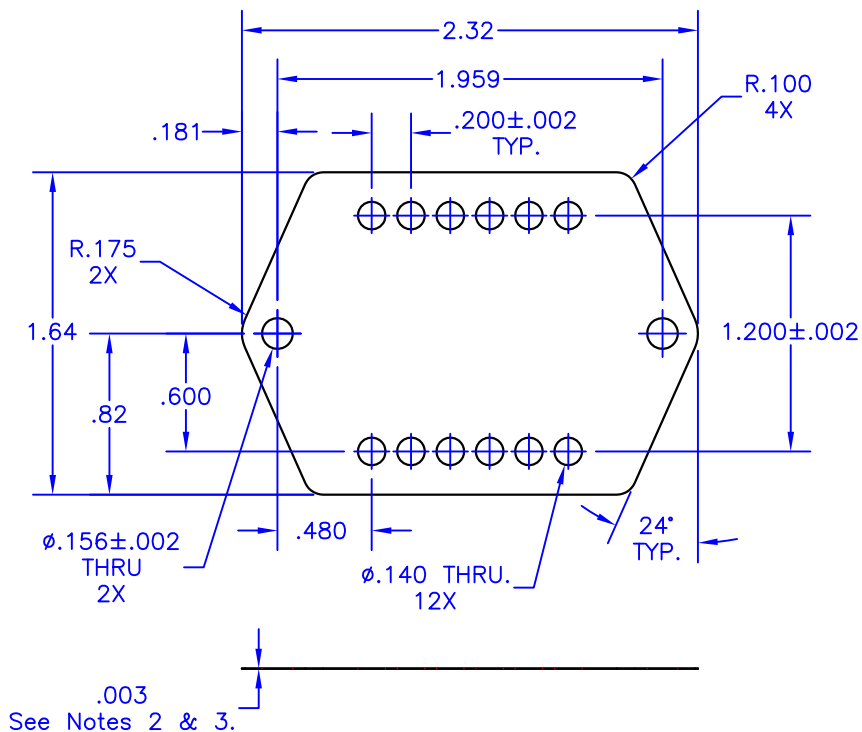

NOTES:

- Unless otherwise noted, all dimensions are in inches.
- Foil Material: .002 thick 1145 aluminum
- Interface Material: .0005 thick phase-change thermal compound, both sides.
Maximum shipping & storage temperature – 40°C
Reflow temperature – 60°C
Maximum recommended service temperature – 200°C
- Thermal impedance: .030 °C/W-in² (.194 °C/W-cm²) @ 20psi
- Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
- Used with Power DIP packages (Apex designators: CR, CU, DC & DD).
- Power Devices part no. AL-232-164-APX
- Box part number is G760 (2 7/8" x 2" x 1/4") – Gary Plastics.
- Supplier is to label each plastic box with the Apex part number.

TOLERANCES - UNLESS OTHERWISE SPECIFIED
.XX = ±.01 [.254]
.XXX = ±.005 [.127]
ANG. = ±5°



TITLE: THERMAL WASHER, P-DIP		MODEL: TW05	
SUBJECT: MECHANICAL DRAWING			
ENGINEER: D-M	DRAWN BY: R.MOR	DCAL: 13242	SH. OF 1 1
FILENAME: TW05	REV: I	DATE: 03JUN13	

4

3

2

1