
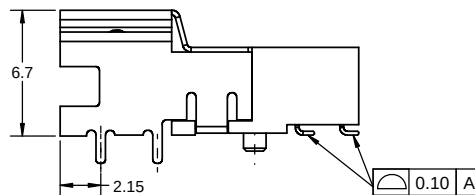
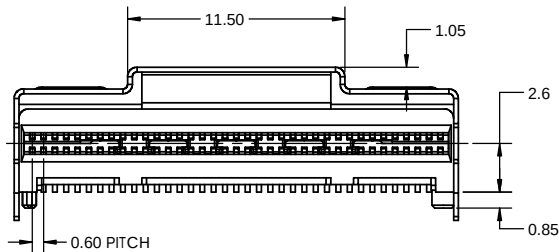
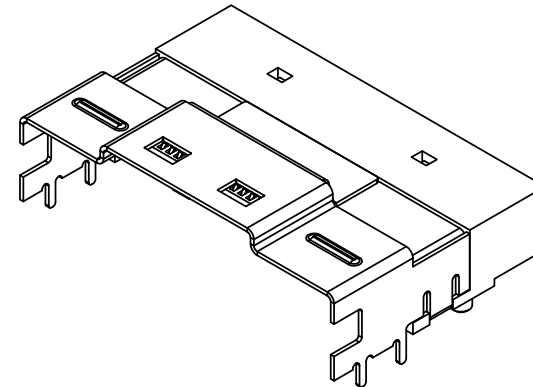


REVISONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
L	UPDATE DESCRIPTION	APR06/16	JS

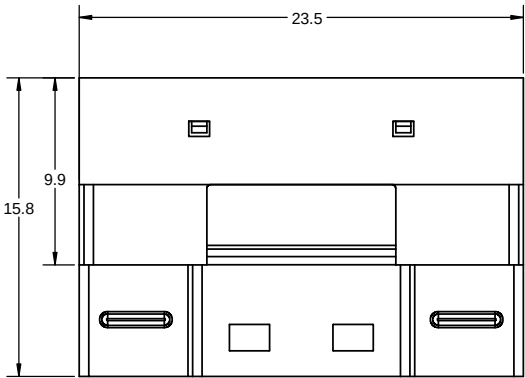

U10 - A074 - X X X X

OPTIONS

0T = STANDARD CONSTRUCTION WITH TAPE & REEL PACKAGING

1T = NO RESONANCE DAMPING FEATURE WITH TAPE & REEL PACKAGING

LATCH PIN LENGTH OPTIONS

0 = 1.50

4 = 2.20

5 = 3.00

6 = 4.20

CONTACT PLATING OPTION

2 = 30 MICROINCHES OF GOLD ON MATING END WITH 100 MICROINCHES MINIMUM OF MATTE TIN ON SOLDER TERMINATION. 50-75 MICROINCHES OF NICKEL UNDERPLATE ALL OVER


3 = 15 MICROINCHES OF GOLD ON MATING END WITH 100 MICROINCHES MINIMUM OF MATTE TIN ON SOLDER TERMINATION. 50-75 MICROINCHES OF NICKEL UNDERPLATE ALL OVER

NOTES:

1) MATERIAL:

HOUSING: SOLDER REFLOW PROCESS COMPATIBLE LCP, UL94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY
LATCH: PHOSPHOR BRONZE
RESONANCE DAMPENING FEATURE: SEMI-CONDUCTIVE POLYMER

2)RoHS COMPLIANT

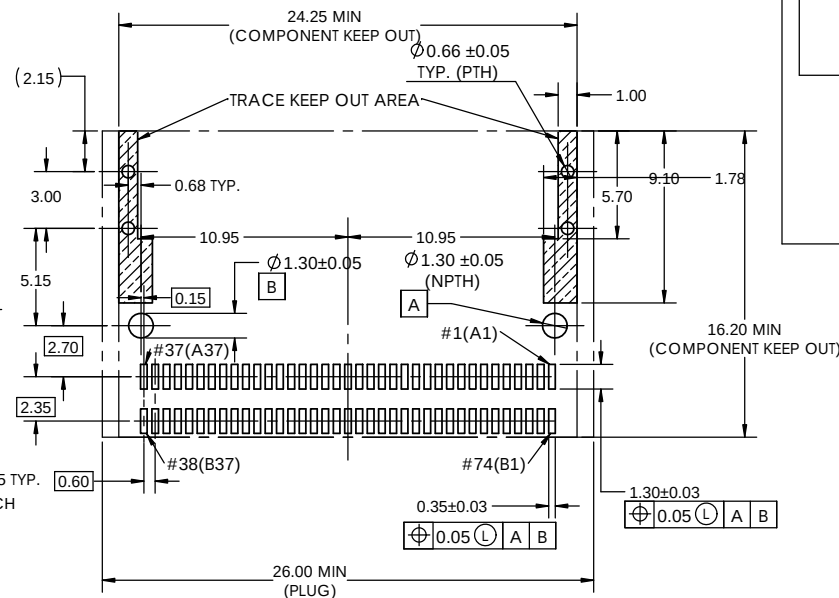

UNLESS SPECIFIED OTHERWISE		DRAWN	C.MICHLIK	NOV27/13
PRIMARY UNITS MILLIMETERS		CHECKED	BA.P	SEP16/14
SECONDARY		M.E. APP'D		
REFERENCE IN PARENTHESES		Q.A. APP'D		
GENERAL TOLERANCES		DWG. APP'D	C.MICHLIK	NOV27/13
1 DECIMAL PLACE	±0.35	ENG. REL. NO.	ECN TBD	
2 DECIMAL PLACES	±0.25	REF.		
3 DECIMAL PLACES	±0.150	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	±2°			

Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenolcanada.com			
ULTRAPORT SLIMSAS™ 8X24 R/A RECEPTACLE WITH LATCH			
DWG. NO. P-U10-A074-XXXX			REV L
CODE ID NO. 03554	DWG SIZE: C	SCALE: 5:1	SHEET 1 OF 1



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[U10-A074-200T](#) [U10-A074-201T](#) [U10-A074-300T](#) [U10-A074-301T](#)