

# ALUMINUM ELECTROLYTIC CAPACITORS

# UAQ

Wide Temperature Range, Permissible  
Abnormal Voltage


- Improved safety feature for abnormally excessive voltage.
- High ripple current product.
- Compliant to the RoHS directive (2011/65/EU).



## Specifications

| Item                          | Performance Characteristics   |   |                   |
|-------------------------------|---|---|-------------------|
| Category Temperature Range    | -40 to +105°C   |   |                   |
| Rated Voltage Range           | 200 · 400V  |   |                   |
| Rated Capacitance Range       | 10 to 220µF   |   |                   |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C   |   |                   |
| Leakage Current               | After 1 minute's application of rated voltage at 20°C, leakage current is 0.04CV+100 (µA) or less.  |   |                   |
| Tangent of loss angle (tan δ) | Rated voltage (V)   | 200   | 400               |
|                               | tan δ (MAX.)  | 0.15  | 0.15              |
| Stability at Low Temperature  | Measurement frequency: 120Hz at 20°C  |   |                   |
|                               | Rated voltage (V)   |   | 200               |
|                               | Impedance ratio ZT / Z20 (MAX.)   |   | 3                 |
| Endurance                     | Z-25°C / Z+20°C   | 3   | 8                 |
|                               | Z-40°C / Z+20°C   | 6   | 10                |
| Shelf Life                    | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.             |   |                   |
|                               | Capacitance change  | Within ±20% of the initial capacitance value      |                   |
| Safety Performance            | tan δ   | 200% or less than the initial specified value     |                   |
|                               | Leakage current   | Less than or equal to the initial specified value |                   |
| Marking                       | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |   |                   |
|                               | The pressure relief vent will operate in normal conditions, with no dangerous conditions such as flames, ignitions or dispersion of pieces of the capacitor and / or case.  |   |                   |
|                               | voltage (V)   | Test conditions                                   |                   |
| Safety Performance            | 200   | Limited DC current                                | Test Voltage      |
|                               | 400   | 4A  | 300VDC and 375VDC |
| Marking                       | 400   | 2A  | 500VDC and 600VDC |
|                               | Printed with white color letter on dark brown sleeve.   |   |                   |

## Radial Lead Type

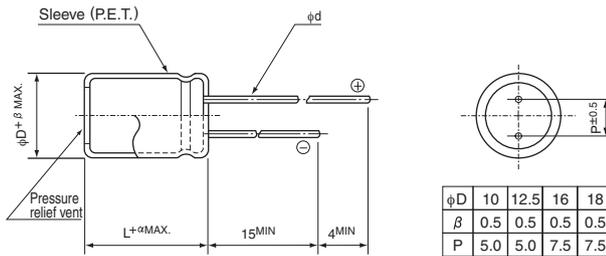


• Please refer to page 20 about the end seal configuration.

|         | 10  | 12.5 | 16  | 18  | 22  |
|---------|-----|------|-----|-----|-----|
| φD (mm) | 10  | 12.5 | 16  | 18  | 22  |
| β       | 0.5 | 0.5  | 0.5 | 0.5 | 1.0 |
| P       | 5.0 | 5.0  | 7.5 | 7.5 | 10  |
| φd      | 0.6 | 0.6  | 0.8 | 0.8 | 1.0 |

※ In case L>25 for φ12.5 (D) case sizes, lead diameter φ0.8 (d) will be applied.

| α | (φD ≤ 18) 2.0 |
|---|---------------|
|   | (φD > 18) 3.0 |

## Type numbering system (Example : 200V 100µF)

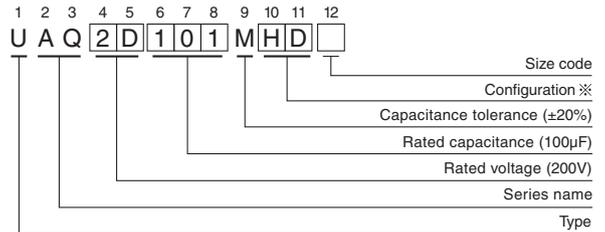

| φ D        | Pb-free leadwire<br>Pb-free PET sleeve |
|------------|--|
| 10         | PD                                     |
| 12.5 to 18 | HD                                     |
| 22         | RD                                     |

## Dimensions

| Cap. (µF) | V(Code) | Code | φD | 200 (2D) |       |     |     | 400 (2G) |       |     |     |     |  |
|-----------|---------|------|----|----------|-------|-----|-----|----------|-------|-----|-----|-----|--|
|           |         |      |    | φ10      | φ12.5 | φ16 | φ18 | φ22      | φ12.5 | φ16 | φ18 | φ22 |  |
| 10        | 100     | 100  |    |          |       |     |     |          |       |     |     |     |  |
| 22        | 220     | 220  |    |          |       |     |     |          |       |     |     |     |  |
| 33        | 330     | 330  |    |          |       |     |     |          |       |     |     |     |  |
| 47        | 470     | 470  |    |          |       |     |     |          |       |     |     |     |  |
| 56        | 560     | 560  |    |          |       |     |     |          |       |     |     |     |  |
| 68        | 680     | 680  |    |          |       |     |     |          |       |     |     |     |  |
| 82        | 820     | 820  |    |          |       |     |     |          |       |     |     |     |  |
| 100       | 101     | 101  |    |          |       |     |     |          |       |     |     |     |  |
| 150       | 151     | 151  |    |          |       |     |     |          |       |     |     |     |  |
| 180       | 181     | 181  |    |          |       |     |     |          |       |     |     |     |  |
| 220       | 221     | 221  |    |          |       |     |     |          |       |     |     |     |  |

Rated ripple current (mArms) at 105°C 120Hz

## Frequency coefficient of rated ripple current

| Frequency   | 50, 60Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-------------|----------|-------|-------|------|---------------|
| Coefficient | 0.80     | 1.00  | 1.25  | 1.40 | 1.60          |

○ : In case of low profile type, [6] will be put at 12th digit of type numbering system.

※ : For further low profile product, [3] will be put at 12th digit.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.