

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

**Material**

- Insulator: Glass Filled Polyester
- Flammability: UL94V-0
- Contacts: Phosphor Bronze
- Contact Plating: See options
- Shell: Brass
- Shell Plating: 100u" Min. Tin over 40u" Nickel

**Ratings**




- Current: 1A
- Voltage: 30V AC(r.m.s.)
- Dielectric Withstanding Voltage: 750V AC at sea level
- Contact Resistance: <math>\le 30m\Omega</math>
- Insulation Resistance: >1,000 M $\Omega$
- Operating Temperature: 0° - +50°
- Storage Temperature: -40° - +60°

RoHS Compliant

PART NUMBER:

**USB-A2HSXX**

- |   |  |
|---|--|
| <p>COLOR:<br/>B: Black<br/>W: White</p> | <p>PLATING:<br/>6: Selective Gold Flash (Std.)<br/>8: Selective 30u" Gold<br/>9: Selective 50u" Gold</p> |
|---|--|

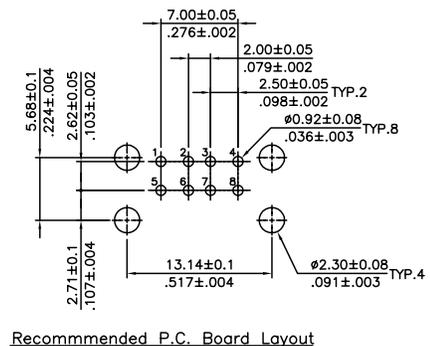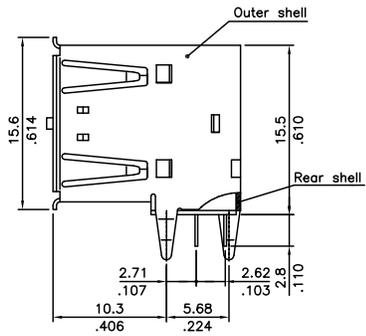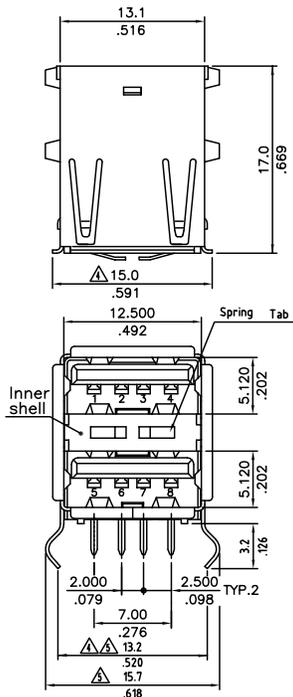

Recommended P.C. Board Layout



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		USB - A type, Horizontal, thru hole, Dual Port			
PART NO.		USB-A2HSXX		DWG NO. USB-A2HSXX.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	4050
		Marvin 2002.03.12	Marvin 2002.03.12	Marvin 2002.03.12	
					Tolerance X* ±1" X.X ±0.30/.012 X.XX ±0.20/.008 X.XXX ±0.10/.004
		SHEET: 01/01			UNIT: mm/inches SCALE: NONE REV.: A