

Professionally approved products. Datasheet

RS 225.6W, 1 Output, Embedded Switch Mode Power Supply (SMPS), 48V dc, 4.7A

RS Stock number 678-3745



Features:

- Universal AC input / Full range
- Built in active PFC circuit compliance to EN61000-3-2
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Free air convection for 150W and forced air convection for 225W
- High power density 4.7w/in³
- Active AC surge current limiting
- U-bracket low profile:38mm




Professionally approved products. Datasheet


MODEL			USP-225-3.3	USP-225-5	USP-225-12	USP-225-15	USP-225-24	USP-225-48
	DC VOLTAGE		3.3V	5V	12V	15V	24V	48V
	RATED CURRENT		40A	40A	18.7A	15A	9.4A	4.7A
	CURRENT RANGE		0~40A	0~40A	0~ 18.7A	0 ~ 15A	0~9.4A	0 ~ 4.7A
	RATED POWER		132W	200W	224.4W	225W	225.6W	225.6W
	RIPPLE & NOISE (max.) Note.2		100mVp-p	100mVp-p	100mVp-p	100mVp-p	150mVp-p	250mVp-p
OUTPUT	VOLTAGE ADJ. RANGE		2.97 ~ 3.6V	4.5 ~ 5.5 V	10.8 ~ 13.2V	13.5~16.5V	21.6~26.4V	43.2~52.8V
	VOLTAGE TOLERANCE Note.3		±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
	LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME		500ms, 30ms/230V/	AC 1200ms, 3	0ms/115VAC at full loa	ad		
	HOLD UP TIME (Typ.)		22ms/230VAC 22ms/115VAC at full load					
	VOLTAGE RANGE		90 ~ 264VAC 127 ~ 370VDC					
	FREQUENCYRANGE		47 ~ 63Hz					
	POWER FACTOR (Typ.)		PF>0.93/230VAC PF>0.97/115VAC at full load					
NEUT	EFFICIENCY (Typ		72%	77%	83%	84%	85%	86%
NPUT	AC CURRENT	115VAC	2.2A	3.3A				
	(Typ.)	230VAC	1.1A 1.6A					
	INRUSH CURREN			30A/230VAC				
	LEAKAGE CURRENT		<3.5mA/240VAC					
			105 ~ 150% rated output power					
	OVERLOAD		Protection type: Constant current limiting, recovers automatically after fault condition is removed					
			3.6 ~ 4.4V	5.5 ~ 7.4V	13.2~ 16.3V	16.5 ~ 20.2V	26.4 ~ 32.4V	52.8 ~ 64.8V
PROTECTION	OVER VOLTAGE		3.6 ~ 4.4V 5.5 ~ 7.4V 13.2 ~ 16.3V 16.5 ~ 20.2V 26.4 ~ 32.4V 52.6 ~ 04.6V Protection type: Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE		95°C ±5°C (RTH2 : detect on heatsink of power transistor)					
			Protection type: Shut down o/p voltage, recovers automatically after temperature goes down					
	WORKING TEMP.		-20 ~ +65°C (Refer to output load derating curve)					
			20 ~ 90% RH non-condensing					
ENVIRONMENT	WORKING HUMIDITY		40 ~ +85°C, 10 ~ 95% RH					
E-HINVAINENTI	STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT		±0.03%/°C (0~50°C)					
	VIBRATION	-111	10 ~ 500Hz, 2G 10m in./1 cycle, 60 min. each along X, Y, Z axes					
	SAFETY STANDARDS		UL60950-1, TUV EN60950-1 approved					
	WITHSTAND VOLTAGE		I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
SAFETY &			I/P-O/P. I/P-FG. O/P-FG:100M Ohms/500VDC					
EMC	ISOLATION RESISTANCE							
Note 4)	EMICONDUCTION & RADIATION							
	HARMONIC CURRENT		Compliance to EN61000-3-2,-3					
	EMS IMMUNITY MTBF		Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, light industry level, criteria A					
OTHERS			220K hrs min. MIL-HDBK-217F (25°C)					
OTHERS	DIMENSION		202*101.5*38mm (L*W*H)					
	PACKING		0.85Kg; 16pcs/14.6Kg/0.76CUFT					
NOTE	Ripple & noiseTolerance : inc	are measure dudes set up oply is consid	cially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. sured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 of & 47 of parallel capacitor. up tolerance, line regulation and load regulation. isidered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets					



Professionally approved products. Datasheet



Case No. 928 Unit:mm

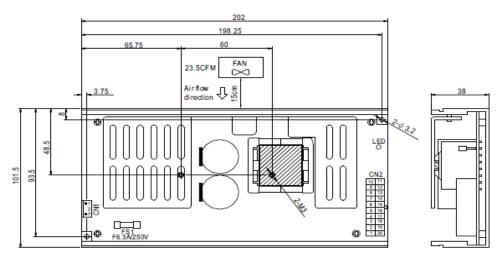


AC Input Connector (CN1): JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal	
1	AC/N	JST VHR	JSTSVH-21T-P1.1	
2	No Pin	orequivalent	or equivalent	
3	AC/L			

DC Output Connector (CN2): MOLEX 39-29-9206 or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1~5	+V	MOLEY CCC	MOI EVELED
6~15	-V	MOLEX 5557 or equivalent	MOLEX 5556 or equivalent
16~20	+V	or oquivalent	or oquivaroni



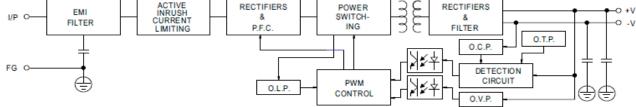

■ Derating Curve

■ Static Characteristics (5V)

