



# ALUMINUM ELECTROLYTIC CAPACITORS

**SA** 7mmL, For General Purposes  
series

- Standard miniature series with 7mm height.
- Compliant to the RoHS directive (2011/65/EU).

**SR** 7mmL, High CV  
series


- Higher CV series with 7mm height.

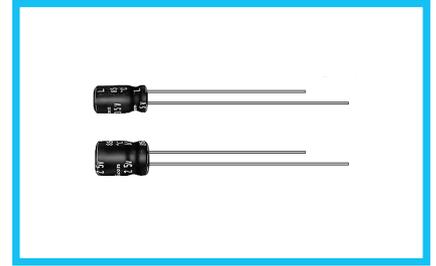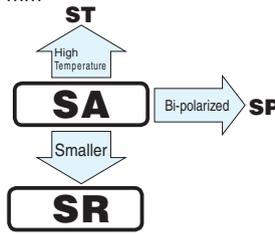


## Specifications

Item	SA series	SR series						
Category Temperature Range	-40 to +85°C	-40 to +85°C						
Rated Voltage Range	6.3 to 50V	4 to 50V						
Rated Capacitance Range	0.1 to 220μF	0.1 to 470μF						
Capacitance Tolerance	±20% at 120Hz, 20°C	0.1 to 470μF						
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.							
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C							
	Rated voltage (V)	4	6.3	10	16	25	35	50
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)	4	6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	6	4	3	2	2	2
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.							
	Capacitance change	Within ±20% of the initial capacitance value						
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.							
	tan δ	200% or less than the initial specified value						
Marking	Printed with white color letter on black sleeve.							
	Leakage current	Less than or equal to the initial specified value						

## Radial Lead Type

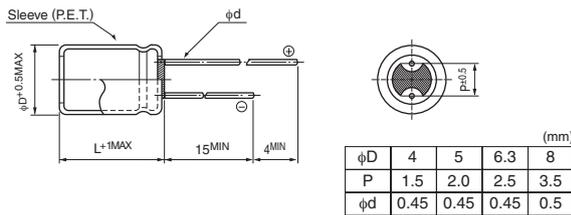

## Type numbering system (Example : SA series : 10V 33μF)

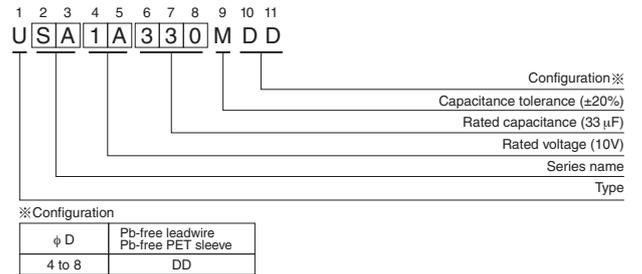

## Dimensions

Cap.(μF)	V(Code) Series Code	4 (0G)		6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
		SR	SA	SR	SA	SR	SA	SR	SA	SR	SA	SR	SA	SR	
0.1	0R1													4 × 7 1.0	4 × 7 1.0
0.22	R22													4 × 7 2.3	4 × 7 2.3
0.33	R33													4 × 7 3.5	4 × 7 3.5
0.47	R47													4 × 7 5.0	4 × 7 5.0
1	010													4 × 7 10	4 × 7 10
2.2	2R2													4 × 7 19	4 × 7 19
3.3	3R3													4 × 7 24	4 × 7 24
4.7	4R7											4 × 7 24	4 × 7 24	5 × 7 29	4 × 7 28
10	100						4 × 7 28	4 × 7 28	5 × 7 33	4 × 7 28	5 × 7 36	4 × 7 31	6.3 × 7 44	5 × 7 44	5 × 7 38
22	220		4 × 7 34	4 × 7 34	5 × 7 38	4 × 7 35	5 × 7 44	4 × 7 39	6.3 × 7 51	5 × 7 48	6.3 × 7 57	5 × 7 52	8 × 7 65	8 × 7 65	6.3 × 7 58
33	330	4 × 7 33	5 × 7 42	4 × 7 40	5 × 7 47	4 × 7 43	6.3 × 7 57	5 × 7 55	6.3 × 7 63	5 × 7 58	8 × 7 72	6.3 × 7 65	8 × 7 75	8 × 7 75	8 × 7 75
47	470	4 × 7 39	5 × 7 50	4 × 7 48	6.3 × 7 59	5 × 7 59	6.3 × 7 68	5 × 7 65	8 × 7 78	6.3 × 7 71	8 × 7 85	8 × 7 85			
100	101	5 × 7 65	6.3 × 7 77	5 × 7 78	8 × 7 96	6.3 × 7 87	8 × 7 107	6.3 × 7 98	8 × 7 115	8 × 7 115					
220	221	6.3 × 7 110	8 × 7 130	6.3 × 7 120	8 × 7 145	8 × 7 145	8 × 7 150								
330	331	8 × 7 165	8 × 7 180	8 × 7 180											
470	471	8 × 7 240													

## Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Rated ripple current (mA rms) at 85°C 120Hz

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[USA0J101MCA](#) [USR0G331MDD](#) [USR0G470MDD](#) [USR0G471MDD](#) [USR1A101MDD](#) [USR1A220MDD](#)  
[USR1A221MDD](#) [USR0G221MDD](#) [USR0G330MDD](#) [USR0G101MDD](#) [USR0J221MDD](#) [USR0J330MDD](#)  
[USR0J101MDD](#) [USR0J220MDD](#) [USR1A330MDD](#) [USR1A470MDD](#) [USR1C330MDD](#) [USR1C470MDD](#)  
[USR1E100MDD](#) [USR1H100MDD](#) [USR1H220MDD](#) [USR1V100MDD](#) [USR1V220MDD](#) [USR0J331MDD](#)  
[USR0J470MDD](#) [USR1C220MDD](#) [USR1H010MDD](#) [USR1H0R1MDD](#) [USR1HR33MDD](#) [USR1HR47MDD](#)  
[USR1C100MDD](#) [USR1C101MDD](#) [USR1E330MDD](#) [USR1E470MDD](#) [USR1H4R7MDD](#) [USR1HR22MDD](#)  
[USR1V4R7MDD](#) [USR1E100MDD1TE](#) [USR1E220MDD](#) [USR1H2R2MDD](#) [USR1H330MDD](#) [USR1H3R3MDD](#)  
[USR1V330MDD](#) [USR1V470MDD](#) [USR1A101MDD1TP](#) [USR1A221MDD1TD](#) [USR1C101MDD1TP](#)  
[USR1E100MDD1TP](#) [USR1V470MDD1TD](#) [USR1E4R7MDA](#) [USR1E470MDD1TP](#) [USR1H100MDD1TP](#)  
[USR0J331MDD1TD](#) [USR1H330MDD1TE](#) [USR1E4R7MDD](#) [USR1C470MDD1TP](#) [USR1C221MDD](#) [USR1E101MDD](#)  
[USR1E470MDD1TE](#) [USR1V100MDD1TP](#) [USR0J101MDD1TP](#) [USR1E330MDD1TP](#) [USR1E220MDD1TP](#)  
[USR0G221MDD1TP](#) [USR1V4R7MDD1TP](#) [USR1H010MDD1TP](#) [USR1C330MDD1TP](#) [USR1H4R7MDD1TE](#)  
[USR0J470MDD1TP](#) [USR1H4R7MDD1TP](#) [USR1C100MDD1TP](#) [USR1C220MDD1TP](#)