



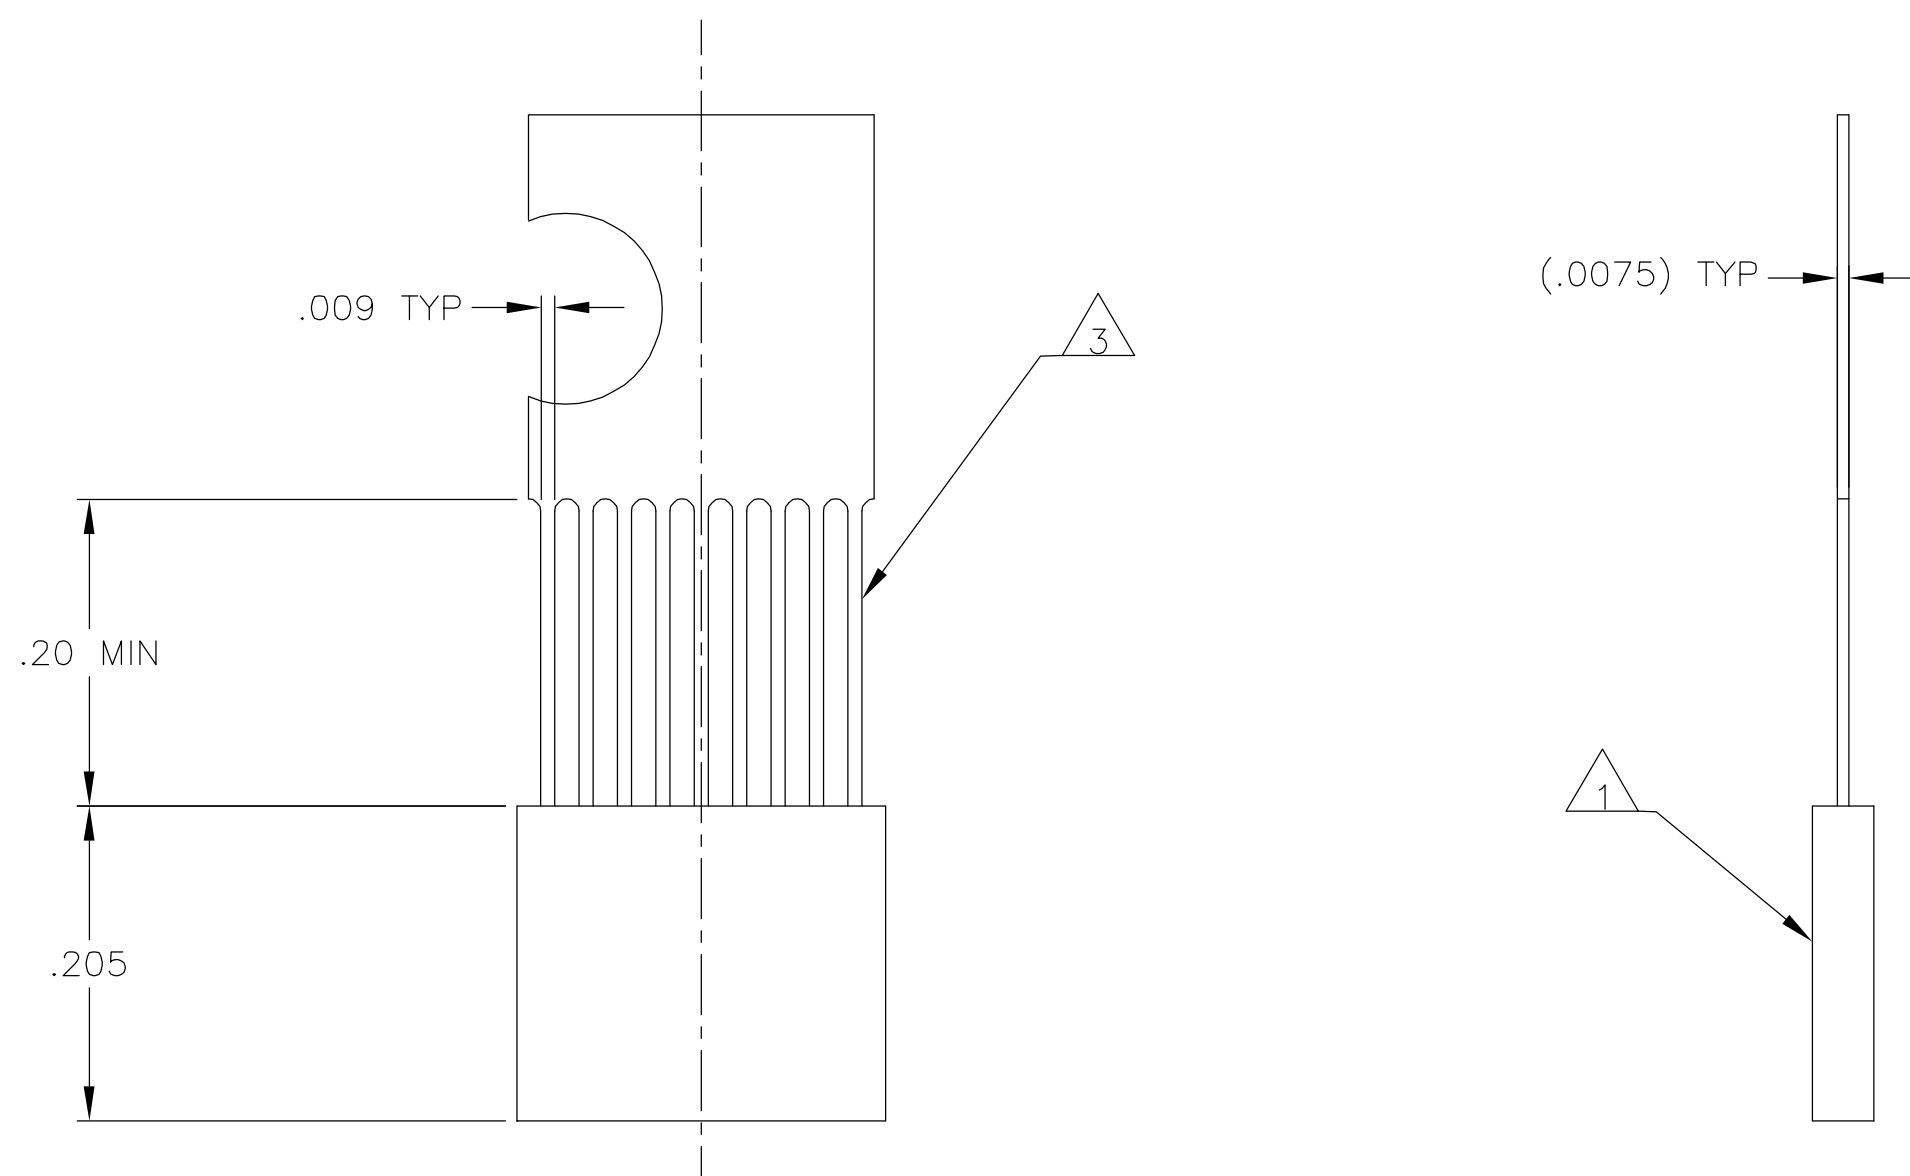


SIZE	C DIM	(L DIM)
04	.115	(.075)
09	.240	(.200)
15	.390	(.350)

	25	.640	(.600)
	37	.940	(.900)
	51	1.290	(1.250)

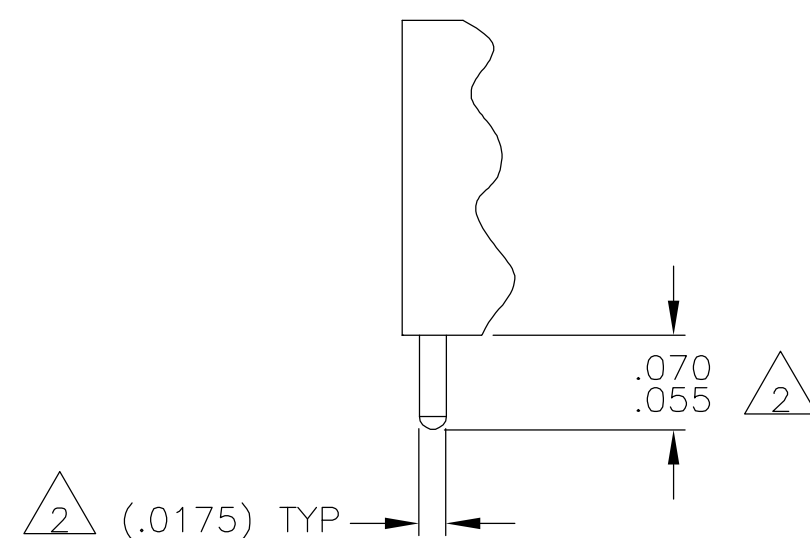


DETAIL A
POSITION "T" SHOWN FOR
REFERENCE

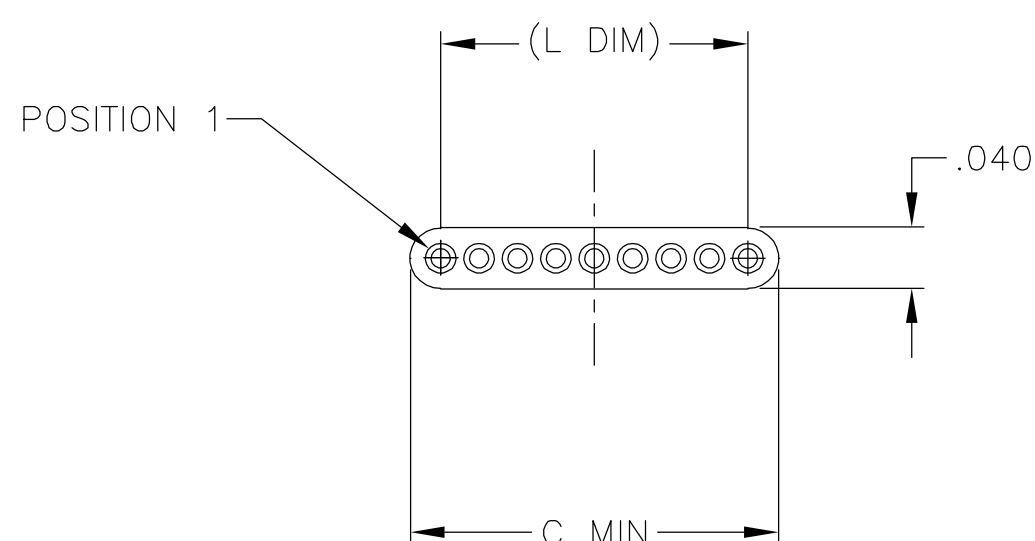

- T  POSITION 1
- U  POSITION 2
- V  POSITION 3
- W  POSITION 1, AND SECOND TO LAST POSITION
- Y  POSITION 1, AND THIRD TO LAST POSITION
- Z  POSITION 2, AND THIRD TO LAST POSITION

- 2 POLARIZING GUIDE POST "PGP" POSITIONS, SEE DETAIL A

- 1 INSULATOR MATERIAL: LCP (LIQUID CRYSTAL POLYMER) PER ASTM D5138
- 2 OPTIONAL POLARIZATION GUIDE POST SHOWN FOR REFERENCE ONLY. IF GUIDE POST(S) ARE REQUIRED, THE LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. GUIDE POST MATERIAL IS 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35.
- 3 LEAD MATERIAL: HH BRASS, TIN LEAD PLATED 60/40 COMPOSITION PER SAE-AMS-P-81728
- 4 WHEN ORDERING THESE SIZES, FIRST CONSULT TYCO ELECTRONICS/NANONICS FOR ADDITIONAL INFORMATION.
- 5 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/070

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C SCHOLL 3 MAR 05 CHK M STORRY 3 MAR 04 APVD —		tyco <i>Electronics</i> Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± .010 3 PLC ± .005 4 PLC ± — ANGLES ± 1°		NAME PLUG ASSEMBLY, UNSHROUDED STRIP, STRAIGHT LEADS, PLASTIC	
MATERIAL SEE NOTES		FINISH SEE NOTES		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	
		SIZE A2		CAGE CODE 00779	
		DRAWING NO C-1589904		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 8:1	
		SHEET 1 of 1		REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[USS009B5](#)