



UUB

Chip Type, High Reliability




- Chip type, high temperature range, for +125°C use.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

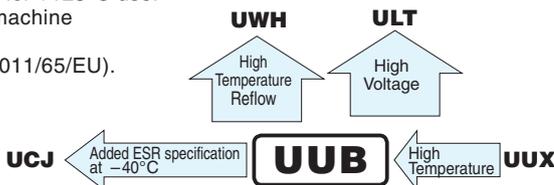


Specifications

Item	Performance Characteristics										
Category Temperature Range	-40 to +125°C										
Rated Voltage Range	10 to 400V										
Rated Capacitance Range	1 to 330μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	Rated voltage (V)	10 to 50									
	Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV (μA). I = 0.04CV+100 (μA) max.(1 minute's)									
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C										
	Rated voltage (V)	10	16	25	35	50	160	200	250	400	
Stability at Low Temperature	Measurement frequency : 120Hz										
	Rated voltage (V)	10	16	25	35	50	160	200	250	400	
Endurance	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	6	4	4	8	8	8	12
	Capacitance change	Within ±30% of the initial capacitance value									
Shelf Life	tan δ	300% or less than the initial specified value									
	Leakage current	Less than or equal to the initial specified value									
Resistance to soldering heat	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (1000 hours for φ8 × 6.2) at 125°C.										
	Capacitance change	Within ±10% of the initial capacitance value									
Marking	tan δ	Less than or equal to the initial specified value									
	Leakage current	Less than or equal to the initial specified value									
Black print on the case top.											

Chip Type

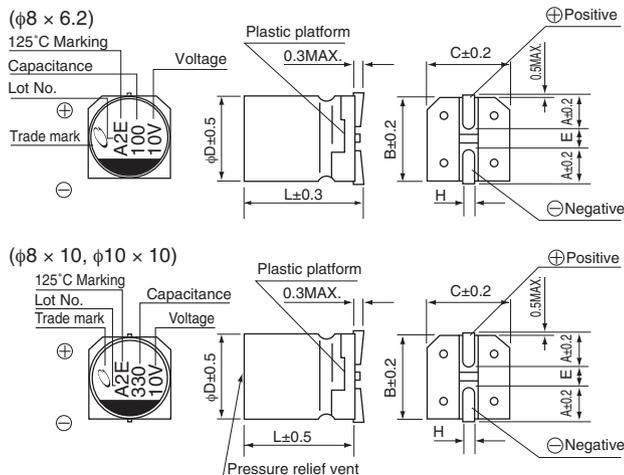

Type numbering system (Example : 10V 100μF)

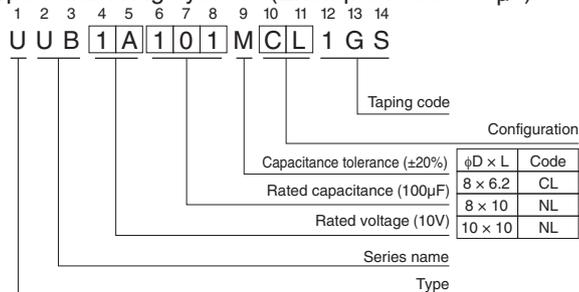

φD × L (mm)	8 × 6.2	8 × 10	10 × 10
A	3.3	2.9	3.2
B	8.3	8.3	10.3
C	8.3	8.3	10.3
E	2.3	3.1	4.5
L	6.2	10	10
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Dimensions

Cap.(μF)	Code	10V		16V		25V		35V		50V	
		1A	1C	1E	1V	1H					
10	100									8 × 6.2	24
22	220									8 × 6.2	38
33	330									8 × 10	46
47	470									10 × 10	58
100	101	8 × 6.2	58	8 × 10	66	8 × 10	74	10 × 10	80		
220	221	8 × 10	90	10 × 10	102	10 × 10	116				
330	331	10 × 10	112							Case size φD × L (mm)	Rated ripple

Cap.(μF)	Code	160V		200V		250V		400V	
		2C	2D	2E	2G				
1	010					8 × 10	26		
1.8	1R8					8 × 10	27		
2.2	2R2					10 × 10	36		
3.3	3R3					10 × 10	38		
4.7	4R7								
6.8	6R8	8 × 10	42	10 × 10	59				
10	100	10 × 10	59	10 × 10	59			Case size φD × L (mm)	Rated ripple

Rated ripple current (mA rms) at 125°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.