


UWS

Chip Type, High CV
High Temperature (260°C) Reflow



- Corresponding with 260°C peak reflow soldering
Recommended reflow condition : 260°C peak 5 sec. 230°C over 60 sec. 2 times
($\phi 8 \times 6.2$, $\phi 10 \times 10$: 1 time)
- Chip type higher capacitance in large case size.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

Products which are scheduled to be discontinued.
Not recommended for new designs




Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 to +85°C							
Rated Voltage Range	6.3 to 50V							
Rated Capacitance Range	22 to 1500μF							
Capacitance Tolerance	± 20% at 120Hz, 20°C							
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV (μA) .							
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C							
	Rated voltage (V)	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	
Stability at Low Temperature	Measurement frequency: 120Hz							
	Rated voltage (V)		6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	5	4	3	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	10	8	6	4	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.				Capacitance change		Within ±20% of the initial capacitance value	
					tan δ		200% or less than the initial specified value	
					Leakage current		Less than or equal to the initial specified value	
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.							
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.				Capacitance change		Within ±10% of the initial capacitance value	
					tan δ		Less than or equal to the initial specified value	
					Leakage current		Less than or equal to the initial specified value	
Marking	Black print on the case top.							


Chip Type

($\phi 6.3$, $\phi 8 \times 6.2$)

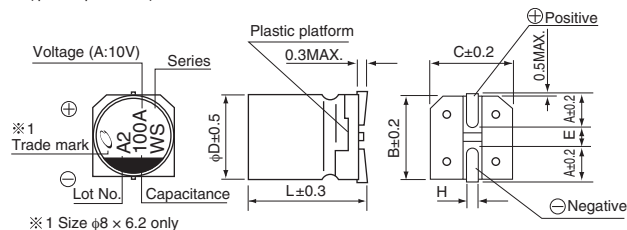


※ 1 Size $\phi 8 \times 6.2$ only

Type numbering system (Example : 10V 100 μ F)

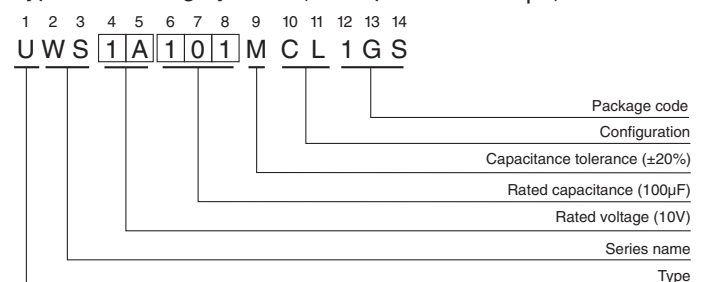

($\phi 8 \times 10$, $\phi 10 \times 10$)

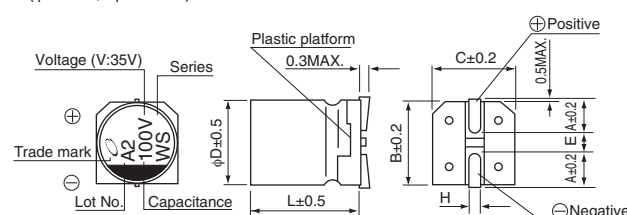

$\phi D \times L$	6.3 × 5.8	6.3 × 7.7	8 × 6.2	8 × 10	10 × 10
A	2.4	2.4	3.3	2.9	3.2
B	6.6	6.6	8.3	8.3	10.3
C	6.6	6.6	8.3	8.3	10.3
E	2.2	2.2	2.3	3.1	4.5
L	5.8	7.7	6.2	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

- Dimension table in next page.

UWS

■ Dimensions

V		6.3		10		16		25		35		50	
Cap. (μF)	Code	0J		1A		1C		1E		1V		1H	
22	220											6.3 × 5.8	45
33	330									6.3 × 5.8	55	8 × 6.2	95
47	470							6.3 × 5.8	65	8 × 6.2	105	8 × 10	140
100	101			6.3 × 5.8	70	8 × 6.2	125	8 × 6.2	145	8 × 10	175	10 × 10	195
150	151			6.3 × 5.8	85	6.3 × 7.7	151	8 × 10	192	8 × 10	214	10 × 10	238
220	221	8 × 6.2	160	8 × 6.2	175	8 × 10	215	10 × 10	250	10 × 10	265	10 × 10	289
330	331	8 × 6.2	190	8 × 10	240	8 × 10	270	10 × 10	305	10 × 10	324		
470	471	8 × 10	265	8 × 10	290	10 × 10	330	10 × 10	393				
680	681	8 × 10	318	10 × 10	374	10 × 10	396						
1000	102	10 × 10	400	10 × 10	454							Case size φ D × L (mm)	Rated ripple
1500	152	10 × 10	489										

Rated ripple current (mA_{rms}) at 85°C 120Hz

● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Less than 47		0.80	1.00	1.15	1.40	1.67
100 to 1500		0.85	1.00	1.08	1.20	1.30

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

<u>UWS0J102MCL1GS</u>	<u>UWS0J152MCL1GS</u>	<u>UWS0J221MCL1GS</u>	<u>UWS0J331MCL1GS</u>	<u>UWS0J471MCL1GS</u>
<u>UWS0J681MCL1GS</u>	<u>UWS1A101MCL1GS</u>	<u>UWS1A102MCL1GS</u>	<u>UWS1A151MCL1GS</u>	<u>UWS1A221MCL1GS</u>
<u>UWS1A331MCL1GS</u>	<u>UWS1A471MCL1GS</u>	<u>UWS1A681MCL1GS</u>	<u>UWS1C101MCL1GS</u>	<u>UWS1C151MCL1GS</u>
<u>UWS1C221MCL1GS</u>	<u>UWS1C331MCL1GS</u>	<u>UWS1C471MCL1GS</u>	<u>UWS1C681MCL1GS</u>	<u>UWS1E101MCL1GS</u>
<u>UWS1E151MCL1GS</u>	<u>UWS1E221MCL1GS</u>	<u>UWS1E331MCL1GS</u>	<u>UWS1E470MCL1GS</u>	<u>UWS1E471MCL1GS</u>
<u>UWS1H101MCL1GS</u>	<u>UWS1H151MCL1GS</u>	<u>UWS1H220MCL1GS</u>	<u>UWS1H221MCL1GS</u>	<u>UWS1H330MCL1GS</u>
<u>UWS1H470MCL1GS</u>	<u>UWS1V101MCL1GS</u>	<u>UWS1V151MCL1GS</u>	<u>UWS1V221MCL1GS</u>	<u>UWS1V330MCL1GS</u>
<u>UWS1V331MCL1GS</u>	<u>UWR1V330MCL1GB</u>			