

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1917101

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1C17D8-002

CW-B1651

CATALOG LISTING
V7-1C17D8-002

REPLACES

RELEASE NO. PR-19218

CATALOG LISTING

M

ISSUE
2

CHECK

REVISIONS
A CO-76109
JWB
8 NOV 93

CHECK



J A L 12 JUN 91

CHECK

J A L 12 JUN 91

WJC 11 JUN 91


DDM/CAD
DRAWN

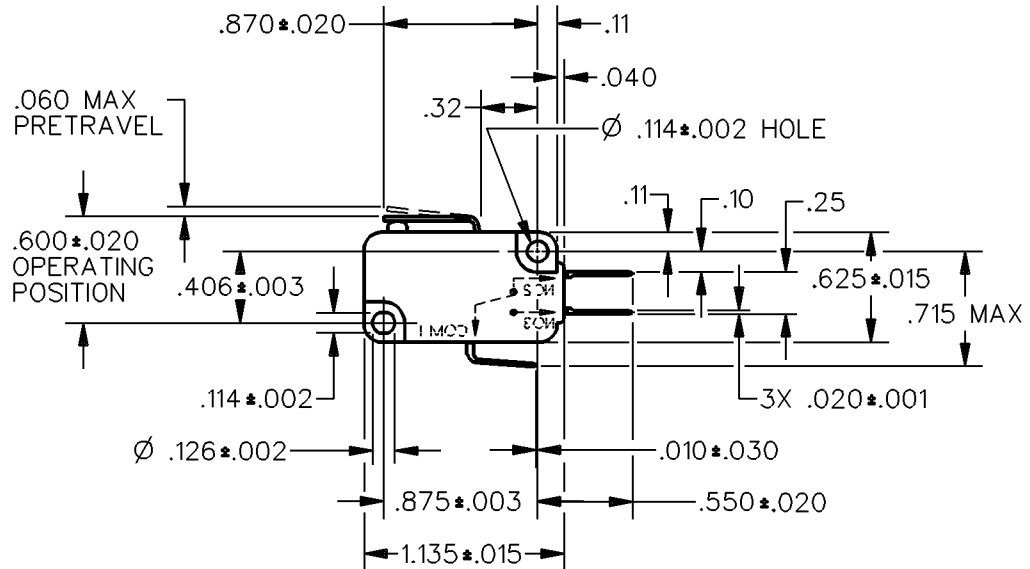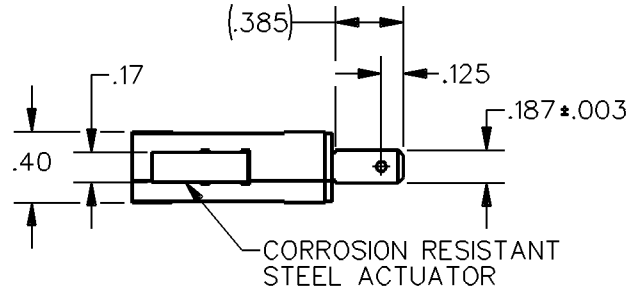

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE— — —160 GRAMS MAX
RELEASE FORCE— — —15 GRAMS MIN
DIFFERENTIAL TRAVEL— — —.015 MAX
OVERTRAVEL— — — — —.035 MIN
RELEASE TRAVEL— — — — —.009 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L215

15.1A 1/2HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 5A 120 VAC "L"



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.01) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT