



Single Phase Rectifier Bridge

$$I_{dAVM} = 124 \text{ A}$$

$$V_{RRM} = 1200-1800 \text{ V}$$

V_{RSM} V	V_{RRM} V	Type
900	800	VBO 125-08NO7
1200	1200	VBO 125-12NO7
1400	1400	VBO 125-14NO7
1600	1600	VBO 125-16NO7
1800	1800	VBO 125-18NO7



Symbol	Conditions	Maximum Ratings	
I_{dAVM}	$T_C = 85^\circ\text{C}$, module	124	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C};$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine	1800 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine	1950 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine	1600 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine	1800 A
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine	16200 A ² s
		$t = 8.3 \text{ ms}$ (60 Hz), sine	16000 A ² s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine	12800 A ² s
		$t = 8.3 \text{ ms}$ (60 Hz), sine	13600 A ² s
T_{VJ}		-40...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-40...+150	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ min}$	2500 V~
		$t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M5)	5 $\pm$ 15%	Nm
		44 $\pm$ 15%	lb.in.
	Terminal connection torque (M5)	5 $\pm$ 15%	Nm
		44 $\pm$ 15%	lb.in.
Weight	typ.	225	g

Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL registered E 72873


Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Dimensions in mm (1 mm = 0.0394")

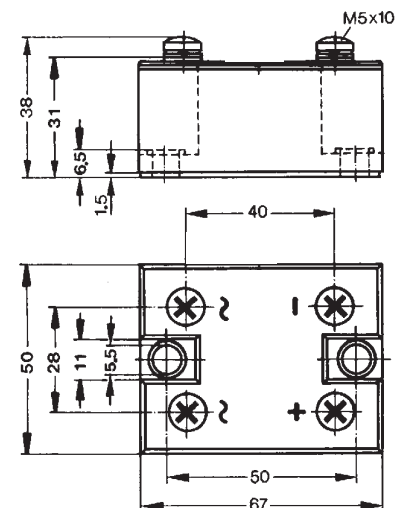

Symbol	Conditions	Characteristic Values	
I_R	$V_R = V_{RRM};$ $T_{VJ} = 25^\circ\text{C}$	$\leq$	0.3 mA
	$V_R = V_{RRM};$ $T_{VJ} = T_{VJM}$	$\leq$	8.0 mA
V_F	$I_F = 150 \text{ A};$ $T_{VJ} = 25^\circ\text{C}$	$\leq$	1.3 V
V_{T0}	For power-loss calculations only		0.8 V
r_T	$T_{VJ} = T_{VJM}$		3 m Ω
R_{thJC}	per diode; 180 $^\circ$		0.83 K/W
	per module; 180 $^\circ$		0.138 K/W
R_{thJK}	per diode; 180 $^\circ$		1.13 K/W
	per module; 180 $^\circ$		0.188 K/W

Data according to IEC 60747 refer to a single diode unless otherwise stated.

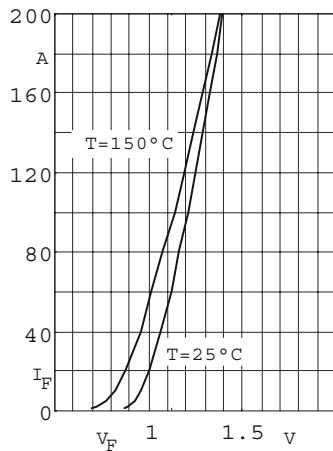


Fig. 1 Forward current versus voltage drop per diode

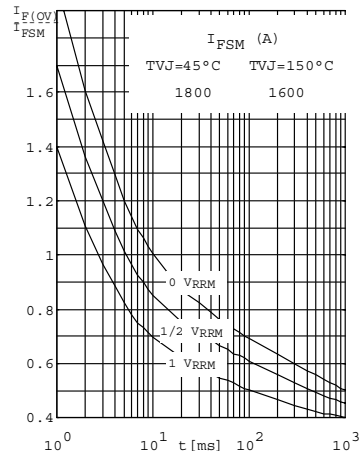


Fig. 2 Surge overload current per diode
 I_{FSM} : Crest value. t : duration

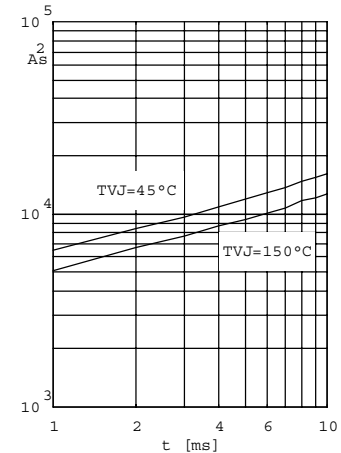


Fig. 3 $\int i^2 dt$ versus time
(1-10ms) per diode or thyristor

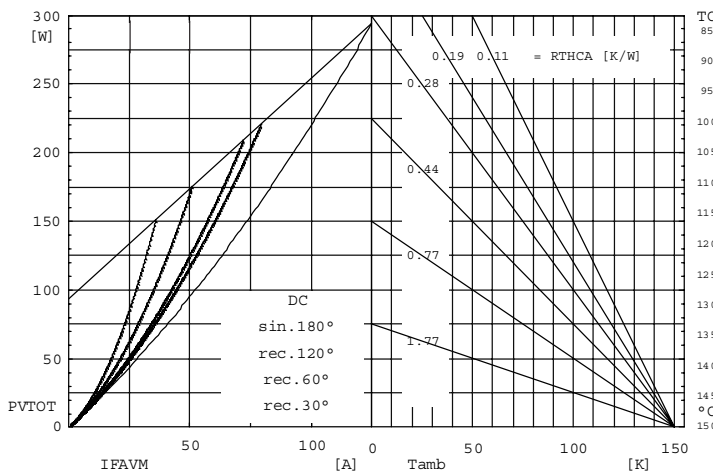


Fig. 4 Power dissipation versus direct output current and ambient temperature

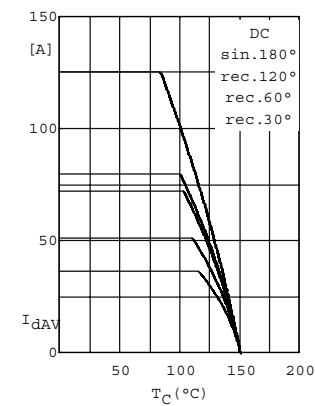


Fig. 5 Maximum forward current at case temperature

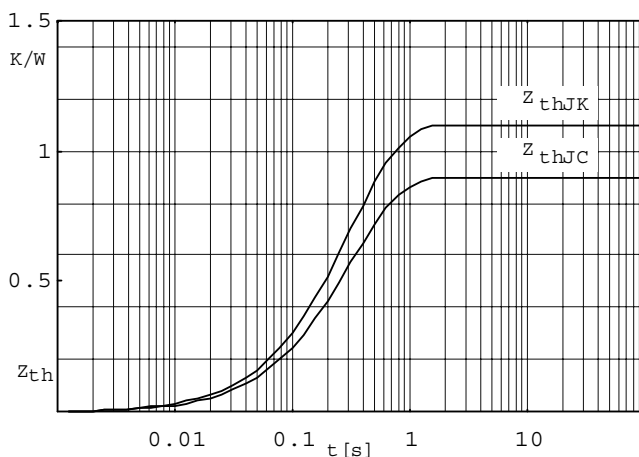


Fig. 6 Transient thermal impedance per diode or thyristor, calculated