

Silicon PIN Photodiode

VEMD2520X01



16758-11

VEMD2500X01



FEATURES

- Package type: surface mount
- Package form: GW, RGW
- Dimensions (L x W x H in mm): 2.3 x 2.3 x 2.8
- AEC-Q101 qualified
- High radiant sensitivity
- Suitable for visible and near infrared radiation
- Fast response times
- Angle of half sensitivity: $\phi = \pm 15^\circ$
- Package matched with IR emitter series VSM2000X01
- Floor life: 4 weeks, MSL 2a, acc. J-STD-020
- Lead (Pb)-free reflow soldering
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

AUTOMOTIVE GRADE



e3

RoHS COMPLIANT

GREEN (S-2008)**

DESCRIPTION

VEMD2500X01 and VEMD2520X01 are high speed and high sensitive PIN photodiodes in a clear epoxy, miniature surface mount package (SMD) with dome lens. The photo sensitive area of the chip is 0.23 mm².

Note

** Please see document "Vishay Material Category Policy":
www.vishay.com/doc?99902

APPLICATIONS

- High speed photo detector

PRODUCT SUMMARY			
COMPONENT	I _{ra} (µA)	φ (deg)	λ _{0.1} (nm)
VEMD2500X01	12	± 15	350 to 1120
VEMD2520X01	12	± 15	350 to 1120

Note

- Test conditions see table "Basic Characteristics"

ORDERING INFORMATION			
ORDERING CODE	PACKAGING	REMARKS	PACKAGE FORM
VEMD2500X01	Tape and reel	MOQ: 6000 pcs, 6000 pcs/reel	Reverse gullwing
VEMD2520X01	Tape and reel	MOQ: 6000 pcs, 6000 pcs/reel	Gullwing

Note

- MOQ: minimum order quantity

ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Reverse voltage		V _R	60	V
Power dissipation	T _{amb} ≤ 25 °C	P _V	215	mW
Junction temperature		T _j	100	°C
Operating temperature range		T _{amb}	- 40 to + 100	°C
Storage temperature range		T _{stg}	- 40 to + 100	°C
Soldering temperature	Acc. reflow solder profile fig. 7	T _{sd}	260	°C
Thermal resistance junction/ambient	Acc. J-STD-051	R _{thJA}	250	K/W

BASIC CHARACTERISTICS ($T_{amb} = 25^\circ C$, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Forward voltage	$I_F = 50 \text{ mA}$	V_F		1		V
Breakdown voltage	$I_R = 100 \mu\text{A}$, $E = 0$	$V_{(BR)}$	32			V
Reverse dark current	$V_R = 10 \text{ V}$, $E = 0$	I_{ro}		1	10	nA
Diode capacitance	$V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$, $E = 0$	C_D		4		pF
	$V_R = 5 \text{ V}$, $f = 1 \text{ MHz}$, $E = 0$	C_D		1.3		pF
Open circuit voltage	$E_e = 1 \text{ mW/cm}^2$, $\lambda = 950 \text{ nm}$	V_o		350		mV
Temperature coefficient of V_o	$E_e = 1 \text{ mW/cm}^2$, $\lambda = 950 \text{ nm}$	TK_{Vo}		- 2.6		mV/K
Short circuit current	$E_e = 1 \text{ mW/cm}^2$, $\lambda = 950 \text{ nm}$	I_k		11		μA
Temperature coefficient of I_k	$E_e = 1 \text{ mW/cm}^2$, $\lambda = 950 \text{ nm}$	TK_{Ik}		0.1		%/K
Reverse light current	$E_e = 1 \text{ mW/cm}^2$, $\lambda = 950 \text{ nm}$, $V_R = 5 \text{ V}$	I_{ra}	8.5	12	17	μA
Angle of half sensitivity		ϕ		± 15		deg
Wavelength of peak sensitivity		λ_p		900		nm
Range of spectral bandwidth		$\lambda_{0.1}$		350 to 1120		nm
Rise time	$V_R = 10 \text{ V}$, $R_L = 1 \text{ k}\Omega$, $\lambda = 820 \text{ nm}$	t_r		100		ns
Fall time	$V_R = 10 \text{ V}$, $R_L = 1 \text{ k}\Omega$, $\lambda = 820 \text{ nm}$	t_f		100		ns

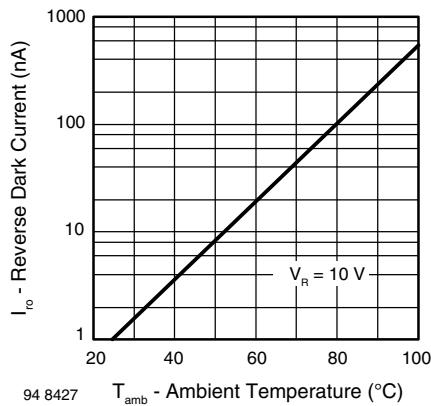
BASIC CHARACTERISTICS ($T_{amb} = 25^\circ C$, unless otherwise specified)


Fig. 1 - Reverse Dark Current vs. Ambient Temperature

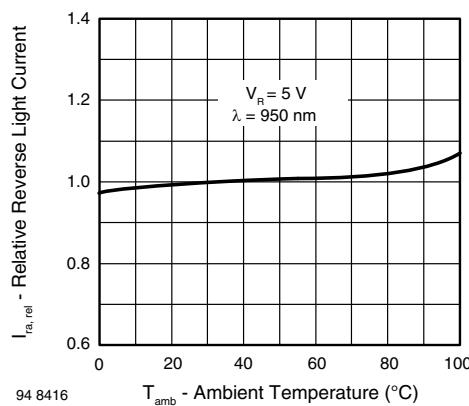


Fig. 2 - Relative Reverse Light Current vs. Ambient Temperature

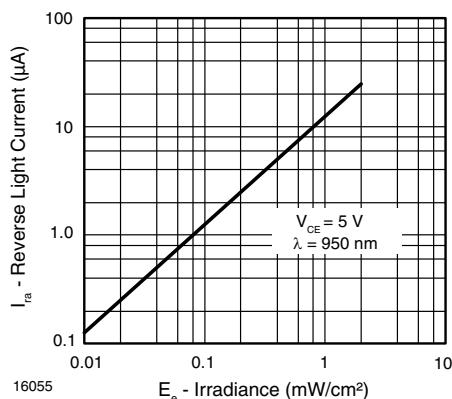


Fig. 3 - Reverse Light Current vs. Irradiance

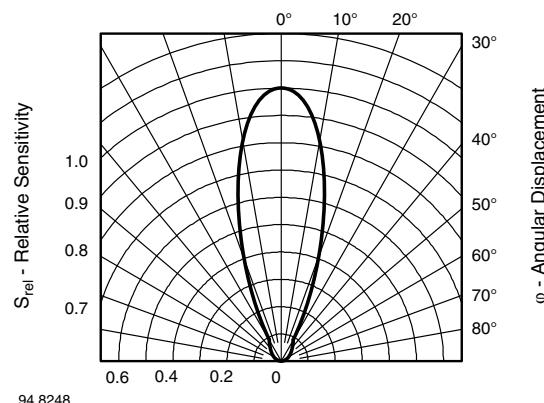


Fig. 6 - Relative Radiant Sensitivity vs. Angular Displacement

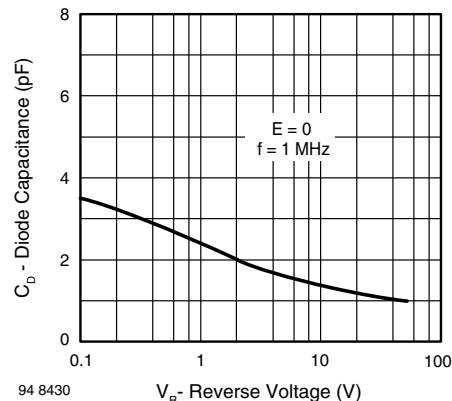


Fig. 4 - Diode Capacitance vs. Reverse Voltage

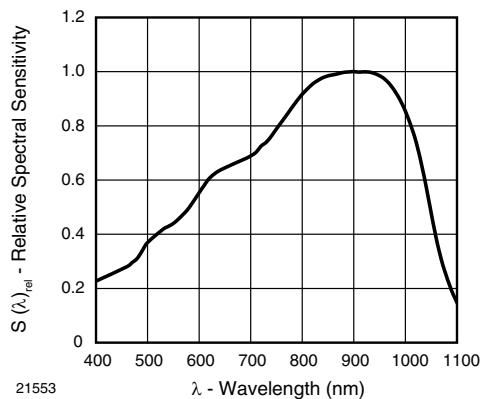


Fig. 5 - Relative Spectral Sensitivity vs. Wavelength

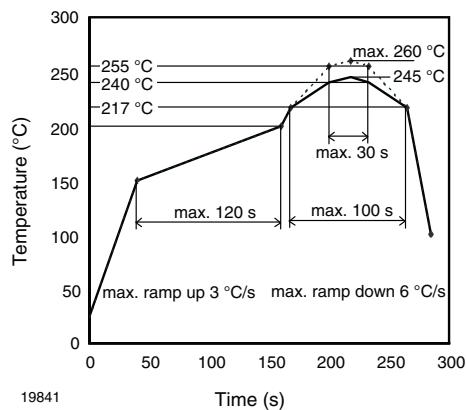
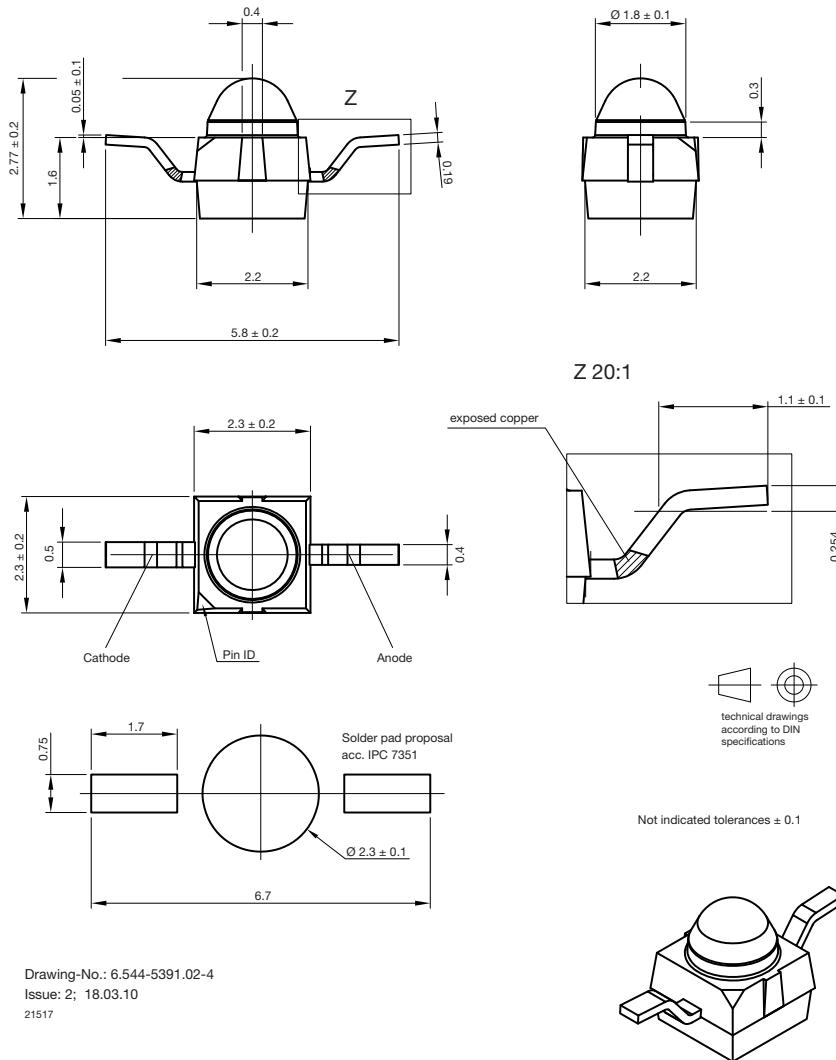
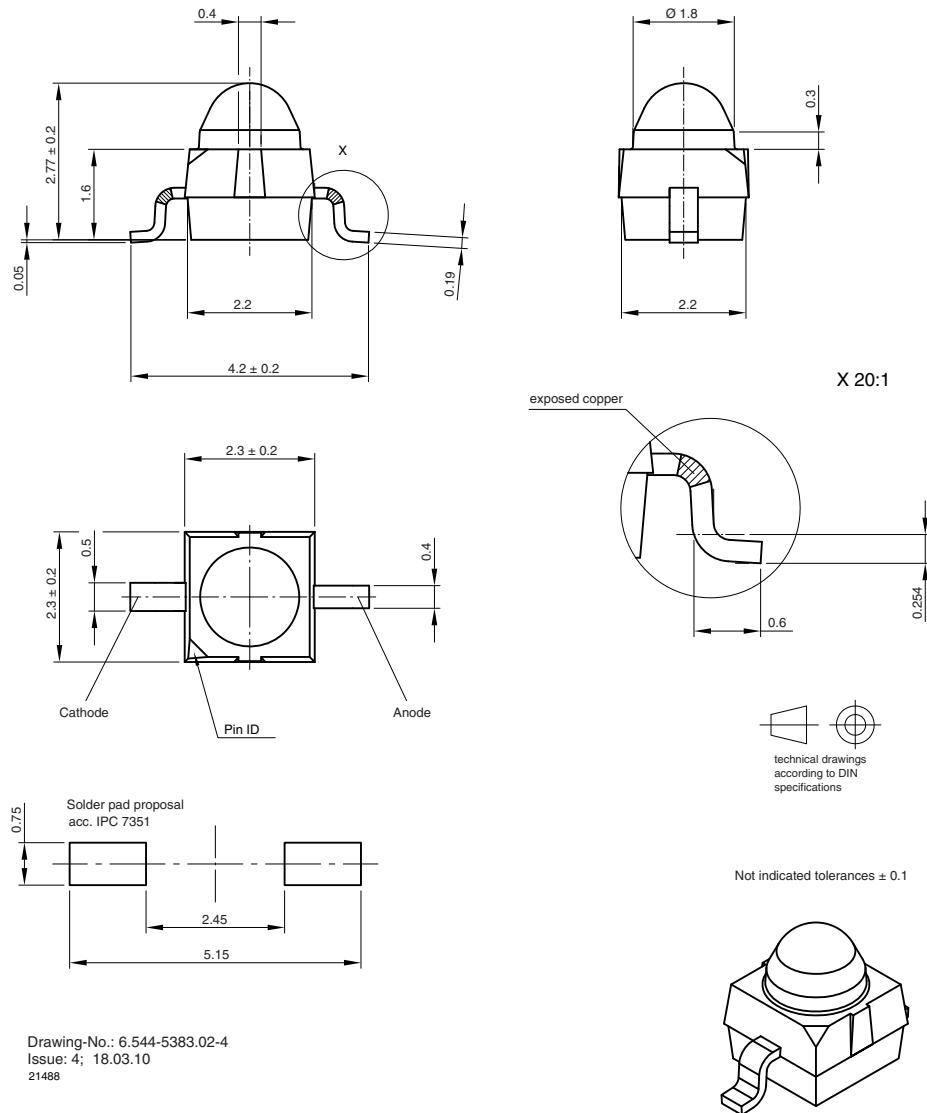
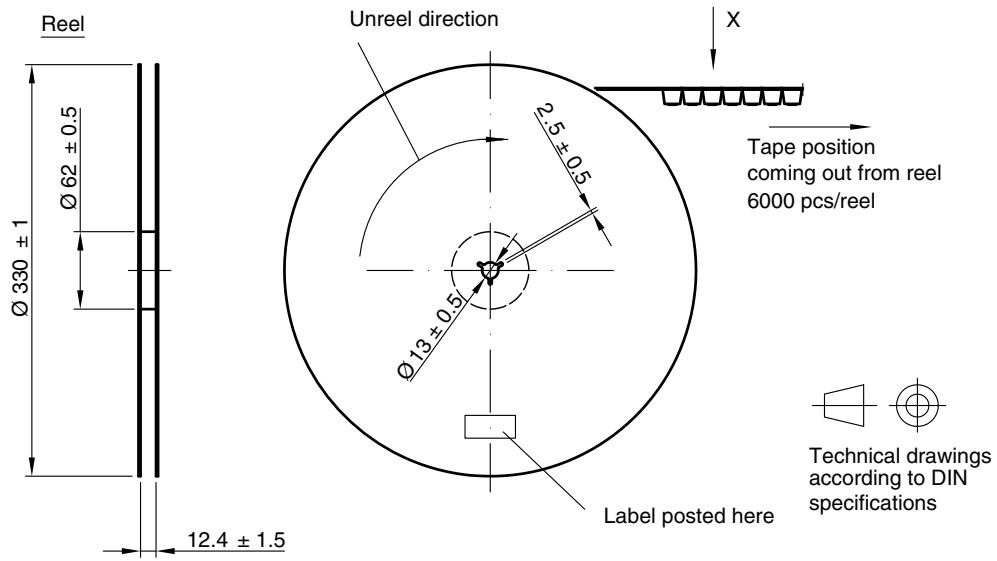
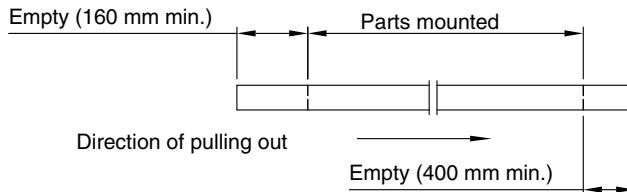
REFLOW SOLDER PROFILE


Fig. 7 - Lead (Pb)-free Reflow Solder Profile acc. J-STD-020D


PACKAGE DIMENSIONS in millimeters: **VEMD2500X01**


PACKAGE DIMENSIONS in millimeters: **VEMD2520X01**


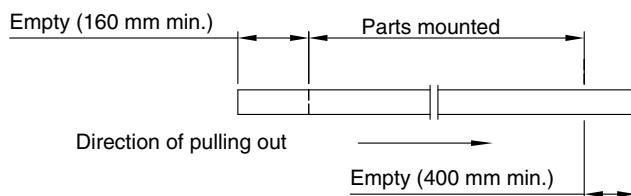
TAPING AND REEL DIMENSIONS in millimeters: **VEMD2500X01**

Leader and trailer tape:

Terminal position in tape

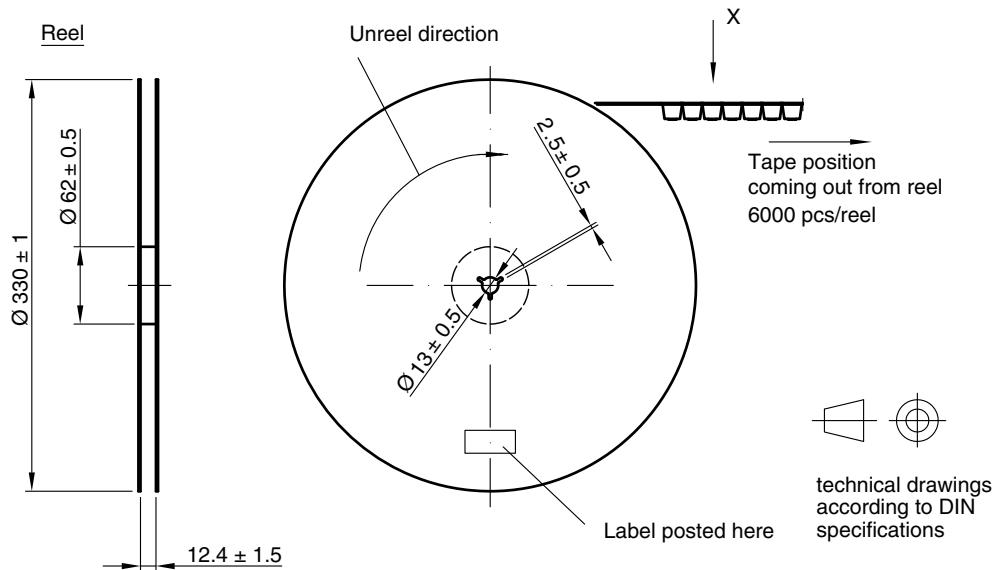Device	Lead I	Lead II
VEMT2000		
VEMT2500	Collector	Emitter
VEMD2000		
VEMD2500		
VSMB2000		
VSMG2000		
VSMD2500		
VSMD2520		
VSMD2550		
VSMD2570		
VSMD2580		
VSMD2590		
VSMD2600		
VSMD2610		
VSMD2620		
VSMD2630		
VSMD2640		
VSMD2650		
VSMD2660		
VSMD2670		
VSMD2680		
VSMD2690		
VSMD2700		
VSMD2710		
VSMD2720		
VSMD2730		
VSMD2740		
VSMD2750		
VSMD2760		
VSMD2770		
VSMD2780		
VSMD2790		
VSMD2800		
VSMD2810		
VSMD2820		
VSMD2830		
VSMD2840		
VSMD2850		
VSMD2860		
VSMD2870		
VSMD2880		
VSMD2890		
VSMD2900		
VSMD2910		
VSMD2920		
VSMD2930		
VSMD2940		
VSMD2950		
VSMD2960		
VSMD2970		
VSMD2980		
VSMD2990		
VSMD3000		
VSMD3010		
VSMD3020		
VSMD3030		
VSMD3040		
VSMD3050		
VSMD3060		
VSMD3070		
VSMD3080		
VSMD3090		
VSMD3100		
VSMD3110		
VSMD3120		
VSMD3130		
VSMD3140		
VSMD3150		
VSMD3160		
VSMD3170		
VSMD3180		
VSMD3190		
VSMD3200		
VSMD3210		
VSMD3220		
VSMD3230		
VSMD3240		
VSMD3250		
VSMD3260		
VSMD3270		
VSMD3280		
VSMD3290		
VSMD3300		
VSMD3310		
VSMD3320		
VSMD3330		
VSMD3340		
VSMD3350		
VSMD3360		
VSMD3370		
VSMD3380		
VSMD3390		
VSMD3400		
VSMD3410		
VSMD3420		
VSMD3430		
VSMD3440		
VSMD3450		
VSMD3460		
VSMD3470		
VSMD3480		
VSMD3490		
VSMD3500		
VSMD3510		
VSMD3520		
VSMD3530		
VSMD3540		
VSMD3550		
VSMD3560		
VSMD3570		
VSMD3580		
VSMD3590		
VSMD3600		
VSMD3610		
VSMD3620		
VSMD3630		
VSMD3640		
VSMD3650		
VSMD3660		
VSMD3670		
VSMD3680		
VSMD3690		
VSMD3700		
VSMD3710		
VSMD3720		
VSMD3730		
VSMD3740		
VSMD3750		
VSMD3760		
VSMD3770		
VSMD3780		
VSMD3790		
VSMD3800		
VSMD3810		
VSMD3820		
VSMD3830		
VSMD3840		
VSMD3850		
VSMD3860		
VSMD3870		
VSMD3880		
VSMD3890		
VSMD3900		
VSMD3910		
VSMD3920		
VSMD3930		
VSMD3940		
VSMD3950		
VSMD3960		
VSMD3970		
VSMD3980		
VSMD3990		
VSMD4000		
VSMD4010		
VSMD4020		
VSMD4030		
VSMD4040		
VSMD4050		
VSMD4060		
VSMD4070		
VSMD4080		
VSMD4090		
VSMD4100		
VSMD4110		
VSMD4120		
VSMD4130		
VSMD4140		
VSMD4150		
VSMD4160		
VSMD4170		
VSMD4180		
VSMD4190		
VSMD4200		
VSMD4210		
VSMD4220		
VSMD4230		
VSMD4240		
VSMD4250		
VSMD4260		
VSMD4270		
VSMD4280		
VSMD4290		
VSMD4300		
VSMD4310		
VSMD4320		
VSMD4330		
VSMD4340		
VSMD4350		
VSMD4360		
VSMD4370		
VSMD4380		
VSMD4390		
VSMD4400		
VSMD4410		
VSMD4420		
VSMD4430		
VSMD4440		
VSMD4450		
VSMD4460		
VSMD4470		
VSMD4480		
VSMD4490		
VSMD4500		
VSMD4510		
VSMD4520		
VSMD4530		
VSMD4540		
VSMD4550		
VSMD4560		
VSMD4570		
VSMD4580		
VSMD4590		
VSMD4600		
VSMD4610		
VSMD4620		
VSMD4630		
VSMD4640		
VSMD4650		
VSMD4660		
VSMD4670		
VSMD4680		
VSMD4690		
VSMD4700		
VSMD4710		
VSMD4720		
VSMD4730		
VSMD4740		
VSMD4750		
VSMD4760		
VSMD4770		
VSMD4780		
VSMD4790		
VSMD4800		
VSMD4810		
VSMD4820		
VSMD4830		
VSMD4840		
VSMD4850		
VSMD4860		
VSMD4870		
VSMD4880		
VSMD4890		
VSMD4900		
VSMD4910		
VSMD4920		
VSMD4930		
VSMD4940		
VSMD4950		
VSMD4960		
VSMD4970		
VSMD4980		
VSMD4990		
VSMD5000		
VSMD5010		
VSMD5020		
VSMD5030		
VSMD5040		
VSMD5050		
VSMD5060		
VSMD5070		
VSMD5080		
VSMD5090		
VSMD5100		
VSMD5110		
VSMD5120		
VSMD5130		
VSMD5140		
VSMD5150		
VSMD5160		
VSMD5170		
VSMD5180		
VSMD5190		
VSMD5200		
VSMD5210		
VSMD5220		
VSMD5230		
VSMD5240		
VSMD5250		
VSMD5260		
VSMD5270		
VSMD5280		
VSMD5290		
VSMD5300		
VSMD5310		
VSMD5320		
VSMD5330		
VSMD5340		
VSMD5350		
VSMD5360		
VSMD5370		
VSMD5380		
VSMD5390		
VSMD5400		
VSMD5410		
VSMD5420		
VSMD5430		
VSMD5440		
VSMD5450		
VSMD5460		
VSMD5470		
VSMD5480		
VSMD5490		
VSMD5500		
VSMD5510		
VSMD5520		
VSMD5530		
VSMD5540		
VSMD5550		
VSMD5560		
VSMD5570		
VSMD5580		
VSMD5590		
VSMD5600		
VSMD5610		
VSMD5620		
VSMD5630		
VSMD5640		
VSMD5650		
VSMD5660		
VSMD5670		
VSMD5680		
VSMD5690		
VSMD5700		
VSMD5710		
VSMD5720		
VSMD5730		
VSMD5740		
VSMD5750		
VSMD5760		
VSMD5770		
VSMD5780		
VSMD5790		
VSMD5800		
VSMD5810		
VSMD5820		
VSMD5830		
VSMD5840		
VSMD5850		
VSMD5860		
VSMD5870		
VSMD5880		
VSMD5890		
VSMD5900		
VSMD5910		
VSMD5920		
VSMD5930		
VSMD5940		
VSMD5950		
VSMD5960		
VSMD5970		
VSMD5980		
VSMD5990		
VSMD6000		
VSMD6010		
VSMD6020		
VSMD6030		
VSMD6040		
VSMD6050		
VSMD6060		
VSMD6070		
VSMD6080		
VSMD6090		
VSMD6100		
VSMD6110		
VSMD6120		
VSMD6130		
VSMD6140		
VSMD6150		
VSMD6160		
VSMD6170		
VSMD6180		
VSMD6190		
VSMD6200		
VSMD6210		
VSMD6220		
VSMD6230		
VSMD6240		
VSMD6250		
VSMD6260		
VSMD6270		
VSMD6280		
VSMD6290		
VSMD6300		
VSMD6310		
VSMD6320		
VSMD6330		
VSMD6340		
VSMD6350		
VSMD6360		
VSMD6370		
VSMD6380		
VSMD6390		
VSMD6400		
VSMD6410		
VSMD6420		
VSMD6430		
VSMD6440		
VSMD6450		
VSMD6460		
VSMD6470		
VSMD6480		
VSMD6490		
VSMD6500		
VSMD6510		
VSMD6520		
VSMD6530		
VSMD6540		
VSMD6550		
VSMD6560		
VSMD6570		
VSMD6580		
VSMD6590		
VSMD6600		
VSMD6610		
VSMD6620		
VSMD6630		
VSMD6640		
VSMD6650		
VSMD6660		
VSMD6670		
VSMD6680		
VSMD6690		
VSMD6700		
VSMD6710		
VSMD6720		
VSMD6730		
VSMD6740		
VSMD6750		
VSMD6760		
VSMD6770		
VSMD6780		
VSMD6790		
VSMD6800		
VSMD6810		
VSMD6820		
VSMD6830		
VSMD6840		
VSMD6850		
VSMD6860		
VSMD6870		
VSMD6880		
VSMD6890		
VSMD6900		
VSMD6910		
VSMD6920		
VSMD6930		
VSMD6940		
VSMD6950		

TAPING AND REEL DIMENSIONS in millimeters: **VEMD2520X01**




Leader and trailer tape:



Terminal position in tape

Device	Lead I	Lead II
VEMT2020		
VEMT2520	Collector	Emitter
VSMB2020		
VSMG2020		
VEMD2020		
VEMD2520		
VSMY2850G	Anode	Cathode

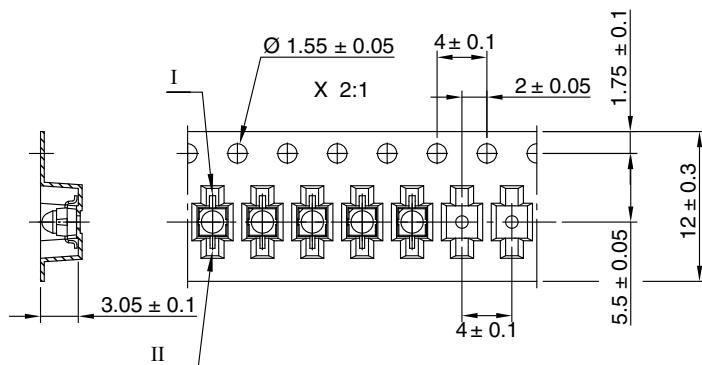

Drawing-No.: 9.800-5091.01-4

Issue: 3; 18.03.10

21571

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay](#):

[VEMD2500X01](#) [VEMD2520X01](#)